

WASHINGTON STATE HIGHWAY DEPARTMENT RESEARCH PROGRAM
REPORT

8.3

**AVALANCHE STUDIES
(1971-1972)**

RESEARCH REPORT

Y-1301

SEPTEMBER 1972

PREPARED FOR
WASHINGTON STATE HIGHWAY COMMISSION
IN COOPERATION WITH
U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION

E.R. LACHAPPELLE
C.B. BROWN R.J. EVANS
GEOPHYSICS PROGRAM AND
DEPARTMENT OF CIVIL ENGINEERING
UNIVERSITY OF WASHINGTON

1. Report No.		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle AVALANCHE STUDIES (1971 - 1972)				5. Report Date September 1972	
				6. Performing Organization Code	
7. Author(s) E.R. LaChapelle, C.B. Brown, R.J. Evans				8. Performing Organization Report No.	
9. Performing Organization Name and Address Geophysics Program and Dept. of Civil Engineering University of Washington Seattle, Washington 98195				10. Work Unit No.	
				11. Contract or Grant No. Y-1301	
				13. Type of Report and Period Covered Interim 1971-72	
12. Sponsoring Agency Name and Address Washington State Highway Commission Dept. of Highways Highway Administration Building Olympia, Washington 98504				14. Sponsoring Agency Code	
15. Supplementary Notes This study was conducted in cooperation with the U.S. Department of Transportation.					
16. Abstract An interim report of the second year of a three year study of avalanche hazards along Washington mountain highways is presented. Applicable snow, avalanche and weather data for 1971-72 are given. Also included are a theoretical treatment of the stress analysis of slab avalanches and a bibliography of snow clearing technology.					
17. Key Words Avalanche control Washington mountain highways Snow and weather data Snow clearing technology				18. Distribution Statement	
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of Pages	22. Price

CONTENTS

	<u>Page No.</u>
INTRODUCTION	2
PART 1. (a) Snow and Avalanche Technology in Japan	4
PART 2. The Mechanics of Slab Avalanching and the State of Stres in Fallen Snow (Brown, Evans, LaChapelle)	21
PART 3. Mechanical Parameters of Snow (Brown, Evans, LaChapelle)	48
PART 4. 1971-1972 Snow Report of the North Cascades (LaChapelle)	52
APPENDIX: Bibliography of Snow Clearing Technology	67

FIGURE CAPTIONS

	<u>Page No.</u>
Figure 1. Slab Avalanche Failure Modes	22
Figure 2. Idealized Plane Geometry	25
Figure 3. Geometry and Incremental Loading Conditions	27
Figure 4. Spherical Ground Geometry and Incremental Conditions	30
Figure 5. Conditions for τ_{ij}	36
Figure 6. Data for Computing $\frac{D}{\tau}$ Ratio	38
Figure 7. Snow Slab Buckling Configuration	40
Figure 8. Typical Glide and Meteorological Data from Sites Near Cascade Field Station, 1971-72	49
Figure 9. 1971-1972 Max-Min Temperatures (°F) North Cascade Highway	53
Figure 10. 1971-1972 Max-Min Temperatures- Washington Pass	54
Figure 11. Cutthroat Creek to Early Winters Total Snow Depth North Cascade Highway	56
Figure 12. Washington Pass to Cutthroat Creek Total Snow Depth North Cascade Highway	57
Figure 13. Early Winters Daily Snowfall Record (2200' Elevation) North Cascade Highway	59
Figure 14. Observed Avalanches, Winter of 1971-1972 North Cascade Highway	60
Figure 15. North Cascade Highway - Delancy Ridge Slide Release Log, 1971-1972	61
Figure 16. North Cascade Highway- Liberty Bell and Cutthroat Ridge Slide Release Log, 1971-1972	62
Figure 17. Early Winters to Washington Pass Slide Path Activity, Winter of 1971-1972	65

TABLE CAPTIONS

TABLE I. Observed Values of B/D in Actual Avalanches	47
TABLE II. North Cascades Highway- Early Winters to Washington Pass Slide Path Activity, Winter of 1971-72	64

LIST OF PLATES

	<u>Page No.</u>
Plate 1.	8
Plate 2.	10
Plate 3.	11
Plate 4.	15
Plate 5.	17
Plate 6.	18
Plate 7.	20
Plate 8.	46

The opinions, findings and conclusions expressed in this publication are those of the authors and not necessarily those of the Washington State Highway Commission, Department of Highways, or the Federal Highway Administration.

INTRODUCTION

This report covers the work performed by the University of Washington in connection with avalanche studies in the North Cascades. The research was performed the second year of a three year program in conjunction with the Washington State Highway Department (Research Project No. Y1301) and included the period from September 1971 to July 1972. The first year of the study provided a field reconnaissance of avalanche conditions on the North Cascades Highway (SR-20)¹. In the second year of the project, diversified activities were carried out by the investigators. These are reported here.

Dr. E. R. LaChapelle was on leave at the Institute of Low Temperature Science, Hokkaido University, Sapporo, Japan, in the Winter Quarter. While in Japan a complete bibliography of snow clearing methods was compiled, and the local avalanche problems studied. The first part of this report is a discussion of the avalanche problems. The written portion is supported by a movie film. The bibliography on snow clearing methods is included as an Appendix at the end of this report.

In order to gain some quantitative impression of avalanche dimensions and mechanics, Dr. Brown and Dr. Evans prepared a study of the state of stress in fallen snow and subsequent mechanics of slab avalanching. Dr. LaChapelle added material which provided correlations of the theory with observed avalanching. A complete paper was published, and the result of this inquiry² is included in the second part of this report.

Important mechanical parameters of the snow are required for the engineering application of the theory. These strength, glide and creep properties are being collected at test sites in the North Cascades. The third part of this report is concerned with the data obtained and the apparatus. The information is not complete, and this aspect of the report is of an interim character. Refinement of the apparatus and the resulting data collection will be continued into the third year of the study. This work is being undertaken by Mr. D. McClung

and supervised by three investigators.

The final part of the report consists of winter observations at Washington Pass which Mr. L. Miller organized. This was supervised by Dr. LaChapelle.

PART 1.

(a) Snow and Avalanche Technology in Japan

The following report summarizes collateral information concerning current snow research and avalanche control practices in Japan. These observations were collected during a tour of Japanese institutions and avalanche sites by E. R. LaChapelle during the period January-March 1972. Emphasis here is placed on those observations most directly pertinent to research on avalanches in the North Cascades being carried out under the present contract.

Snow Research Activities

The Japanese Disaster Prevention Institute maintains snow research stations at Nakaoka and Shin-jo in the Japanese Alps on the Island of Honshu. Both of these stations are engaged in a wide spectrum of applied research relating to avalanche control, snow damage, and problems of snow removal from buildings, streets and highways. By way of background, it can be noted that those parts of the Japanese Alps facing the Sea of Japan are subjected to very heavy winter snowfall at low altitudes, including sea level. Large quantities of snow can arrive in a single storm, usually heavy, wet snow deposited at temperatures close to the freezing point. Many wet snow avalanches are engendered by these snowfalls, which also present formidable difficulties for traffic movement and the general routine of winter life.

The following research projects at the Nagaoka and Shin-jo Stations are especially pertinent.

Roof Snow Removal:

Heavy snow accumulations often cause structural damage to roofs and buildings in the Japanese Alps. Extensive tests are now underway on various methods of removing the snow from roofs. Most of these involve snow melting. Injection of hot water into snow at the roof peaks is one method. Another is circulation

of hot water in pipes immediately under the roof. Special attention is given to design of eaves so that a cold zone does not develop along the roof edge and generate an ice trap. Model roofs of various angles and composition have been constructed at Shin-jo to ascertain the optimum conditions for snow melt.

Snow Settlement:

The well known damaging effects of settlement in a deep snow cover on exposed structures is being systematically tested at Nagaoka by observing the effects of snow on horizontal bars of various shapes, sizes and materials. Tests in a cold laboratory are also underway to determine the zone of influence within the snow cover of buried structures.

Laser Snow Depth Gauge:

The Nagaoka Station has developed a successful laser snow depth gauge which automatically transmits an accurate measure of snow depth to a recorder on interrogation. The laser beam and sensor are shifted by mechanically operated mirrors to scan for and detect the snow surface. The present design is suitable for research purposes but probably is too large and complex for convenient installation at remote sites away from power mains. The basic principle of the gauge can seemingly be adapted to smaller and more portable versions.

Snow Glide Observations:

Especially pertinent to avalanche research is the ingenious methodology developed at Nagaoka to study glide or the movement of the snow cover over the ground. Glide has a significant effect on vegetation and is often related to avalanche formation in wet snow conditions. A research area at Nagaoka has been prepared on a convenient hillside with a tunnel giving access underneath the ground surface at mid-slope. In the roof of the tunnel a glass port has

been installed flush with the ground surface. A direct view of the base of the snow cover is thus possible. Character of the snow crystals, including debris, and the glide motion itself can all be directly observed. A time-lapse motion picture camera has been used to record variations in glide velocity. The study has produced useful insights into the influence of weather patterns and snow thickness on glide motion. It has also identified a period of rapidly accelerated glide prior to the onset of wet snow avalanching on the ground surface.

Snow Melting in Streets:

A convenient combination of warm snowfalls and the availability of warm water from numerous hot springs in the coastal regions of the Japanese Alps has led to an unusual method of removing large snowfalls from city streets. A sprinkler system for distribution of the warm water has been installed down the center of major thoroughfares. As soon as snowfall begins, these sprinklers are turned on and the melted snow is carried away by gutters. Plates 7C and 7D illustrate an operational installation of this system. The Shin-jo Station presently is testing various combinations of sprinklers, spacing and water temperature on a short section of experimental highway to ascertain the optimum method for snow melting. It should be noted that this method is useful only in climates where air temperature commonly rises above freezing after snowfalls; otherwise, a sheet of ice could quickly build up on the streets.

Snow Capacity of Culverts:

Snow plowing activities plus natural and artificial melting place a heavy load of water and slush in the culverts in this climate. The Shin-jo Station has constructed an artificial section of culvert with variable dimensions and input of snow and water. Tests are being made to determine the optimum shape and size of culvert to carry off expected storm loads.

The Japanese National Railways maintains a snow and avalanche research station at Shiozawa. Current research projects of interest include:

Free Water Content Meter:


A modified and improved version of the Ambach method for determining liquid water content of wet snow has been developed. This method depends on the dielectric effects of free water on a capacitor. The improved version samples a large snow volume and utilizes advanced electronics.

High Speed Plow Tests:

To date, the famous JNR Hikari high speed train system has been constructed only in the southern part of the country where winter snowfall is not a problem. Looking forward to eventual extension of such a system to the northern regions, the JNR has begun a series of tests on the design of snow plows intended to operate at speeds up to 150 miles per hour. A scale model test is underway at Shiozawa. A large steel frame (Plate 1a) guides the travel of a cable-propelled model plow through a layer of snow, seen in this Plate just behind the standing figure. Forces exerted on the model plow (Plate 1b) are sensed by strain gauges and sent by radio telemetry to a recorder. A wide variety of plow shapes is now being tested with this equipment to provide design data for a full scale test. (Our 16 mm film on Japanese snow work includes footage of this test in operation.)

Snow Roof Tests:


An alternate method of operating a high speed train in snow country is to cover the track with a continuous snowshed. Various shapes, styles and materials of roofs for this purpose are being tested at Shiozawa with emphasis on developing a design which will allow snow to slide off spontaneously and minimize the need for heavy supporting walls.

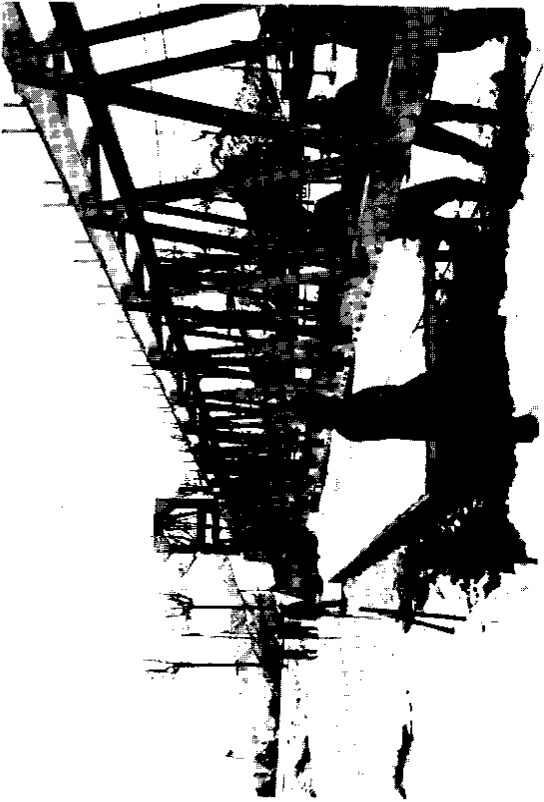

a



b

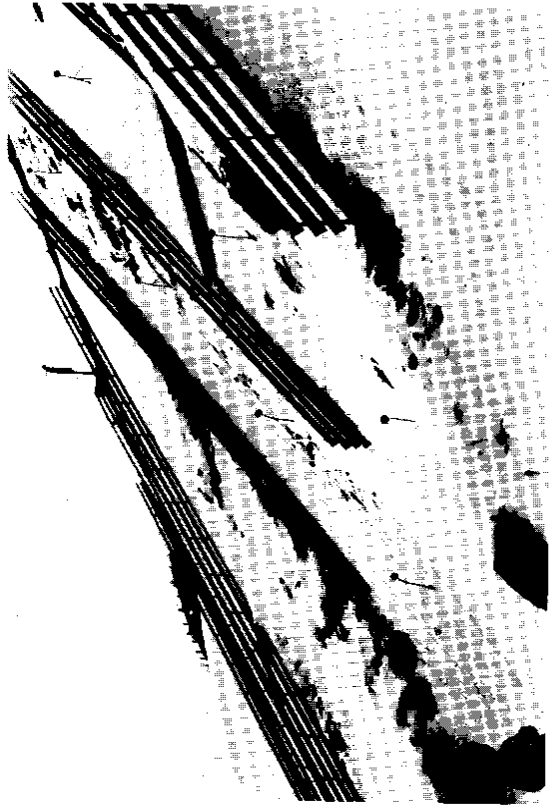

c

The Japanese Ministry of Forests operates a snow research station at Kamabuchi. Emphasis here is on examining the creep and glide characteristics of the snow cover in relation to effects on vegetation. An ambitious test of the effects of exposure (compass orientation) of a slope on glide is underway in an artificial basin carved out of a hillside to form half a bowl with slope varying through 180°. The slopes in this basin are instrumented to measure both creep and glide of the snow. Nearby another section of the hillside has been modified to provide plane slopes of varying inclination and surface roughness (Plate 1c). The willingness to move a substantial amount of earth to establish uniform and controlled test slopes is a noteworthy aspect of this study.

The Institute of Low Temperature Science, Hokkaido University, operates an avalanche research station at Toikanbetsu in Northern Hokkaido. This is a region where wet snow glide avalanches predominate in the spring. A current study program is addressed to the problem of determining the details of snow mechanics involved in creep deformation of the snow cover. An instrumental scheme has been devised to measure strain ellipses in the snow without introducing foreign elements in the snow except at the actual moment of measurement.


Snow Removal Methods

Although the visits to scientific institutions in Japan were not aimed at investigating snow removal methods, there were numerous opportunities to observe this during the winter and to collect some useful information.

The larger snow plows seen in Japan, both push plows and rotaries, were generally related to familiar types known in this country. Push plows with wings and throwing blades (e.g. Plates 3c and 3d) were common. There seems to be little opportunity on the narrow and crowded mountain roads of Japan for such plows to be operated at sufficiently high speeds for effective throwing



b

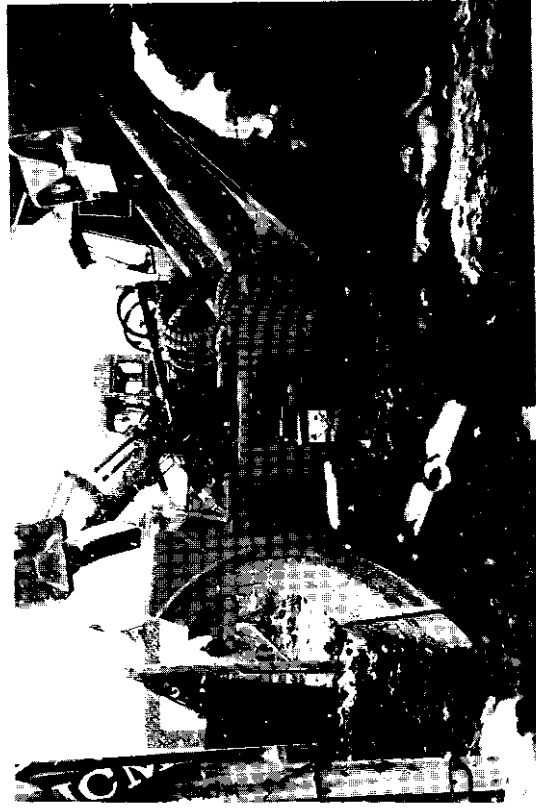

d




a



c




b

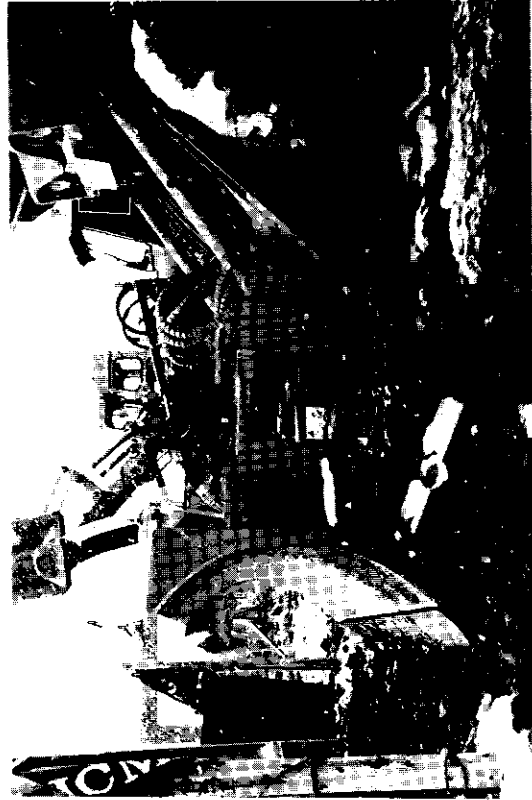

d



a

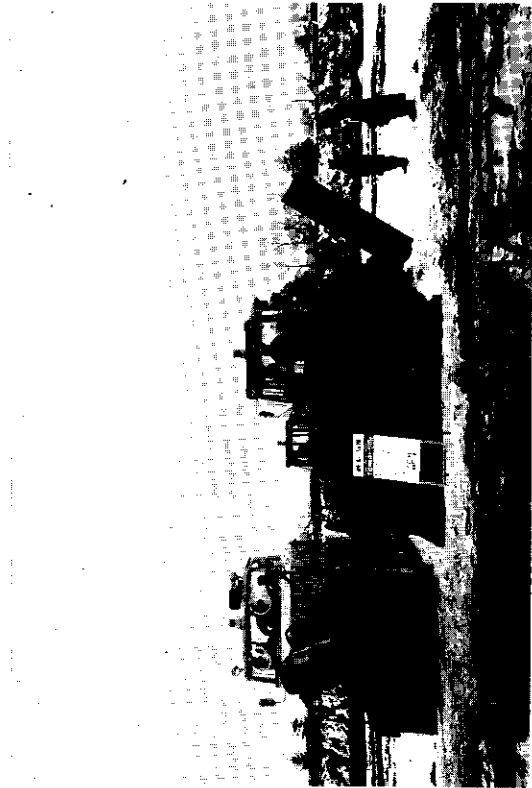

c



b

a



d

c

Plate 3

action. Most such plows observed at work on the highways in fact were operated at much slower speeds. A less familiar type was two variations of large end-loaders. One variation was a straight push plow (Plates 2d and 3b, plus righthand unit in Plate 2c). More unusual was the other variation (not illustrated) in which a rotary package complete with power plant was hung on the front of an end loader.

Only one example of our familiar sno-go type of rotary was seen. Most large rotary plows in Japan are based on the Swiss Rolba design (marketed by Snowblast in U.S. A.). Plates 2a and 2b illustrate heavy-duty modifications of the Rolba system utilizing solid plates instead of open reels to gain additional strength and durability. These large machines appear to be comparable to the Snowblast machine in power and performance. A distinctly different type of rotary plow is the lefthand unit in Plate 2c. This asymmetric design intended for clearing highways in deep snow country utilizes a single rotating blade as combination disaggregator and blower, a design long used on railway snow plows.

The most distinctive Japanese snow plows are the smaller models intended for hand operation by a man walking alongside or at the rear. Several types of these were observed in operation, some of them substantially larger than any hand-guided plows we are familiar with and obviously powered by substantial engines. An example of this type of machine is shown in Plate 3a. Smaller hand operated plows of the garden tractor variety are also common. Another type of small machine is a hand guided push plow resembling a miniature caterpillar tractor which is used for clearing city streets and parking lots.

Extensive use is still made of hand labor to clear snow in Northern Honshu and in Hokkaido. For this purpose a small, hand propelled push plow shaped like a scoop is widely used. Such plows seem more common than snow shovels in many parts of Japan. Observations of these plows in use suggest that they

are an efficient means of clearing snow from sidewalks, driveways and around buildings where powered machinery normally is not used. They could well be adopted in this country for similar purposes where snow shovels are commonly and often inefficiently used.

Avalanche Defenses

A combination of mountainous terrain, heavy snowfalls, and a dense railway and highway network leads to a considerable avalanche hazard to transportation routes in the northern part of Japan. To a very large extent the serious avalanching is associated with wet snow, either freshly deposited or warmed by rains. Many of the avalanche paths threatening rail and highways are relatively short and many, especially in the Japanese Alps, originate in dense timber or brush covered slopes. Large, open slopes involving dry slab avalanches do occur in the higher reaches of the Alps and in the higher mountains of Hokkaido, but these generally are not associated with direct hazards to communities or traffic. Where rail or highways do pass through the bigger avalanche zones, the danger is usually averted by tunneling. Tunnels, in fact, abound everywhere in Japan, and their excavation is undertaken in places where in our own country they would be eschewed on account of cost. (A Japanese engineer, who looked through a copy of the Avalanche Atlas for the North Cascade Highway, remarked that in Japan they would never even consider building a highway in such a high avalanche hazard zone as Washington Pass-- they would tunnel under it.) Avalanche defense systems are widely used and snow sheds are common. Diversion walls and barriers are also frequently used. Most of the defense systems (supporting structures of one kind or another designed to inhibit avalanche release) are on relatively short slopes, in some cases little more than road cuts or embankments. Artificial release of avalanches as a control measure is little used, in large part due to lack of available

military weapons but also to the prevalence of wet snow avalanching, which is less susceptible to reliable artillery or explosive control than dry snow. In some parts of the Japanese Alps a technique is used to dynamite and release the entire snow cover prior to onset of spring melt and a wet slide cycle, but this is limited to relatively small slopes due to the time and effort required to prepare and install the dynamite charges.

The technology of avalanche defense structures in Japan shows evidence of a ready willingness to experiment with fresh ideas and materials. In several places, new structures were explained as being strictly experimental and had in fact not yet stood up to the test of a major avalanche. Most of the defense systems are of recent construction, but there is one rather extensive system of defense for a railroad line in the Japanese Alps which was built over 50 years ago. This system consists of a series of snow sheds, diversion walls and barriers, all of heavy masonry construction. Early European techniques apparently were the basis for this design, but the Japanese construction was carried to considerably greater length and effectiveness than was usual for that period prior to the foundation of a formal science of avalanche defense.

Some specific aspects of modern Japanese avalanche defense systems are discussed below:

Supporting Structures:


Most modern systems of supporting structures follow closely the principles set forth in the Swiss Guidelines. Some of the bridges on smaller slopes are rather light and anchored by uphill tension tables, like those in the cutbanks in Plate 4a. In areas of heavier snowfall, the downhill compression braces following customary Swiss design are used (Plate 4b). Sometimes special soil and foundation problems require extensive concrete footings and braces (Plate 4c). These general patterns, predominantly bridges rather than rakes, are found in



a



b

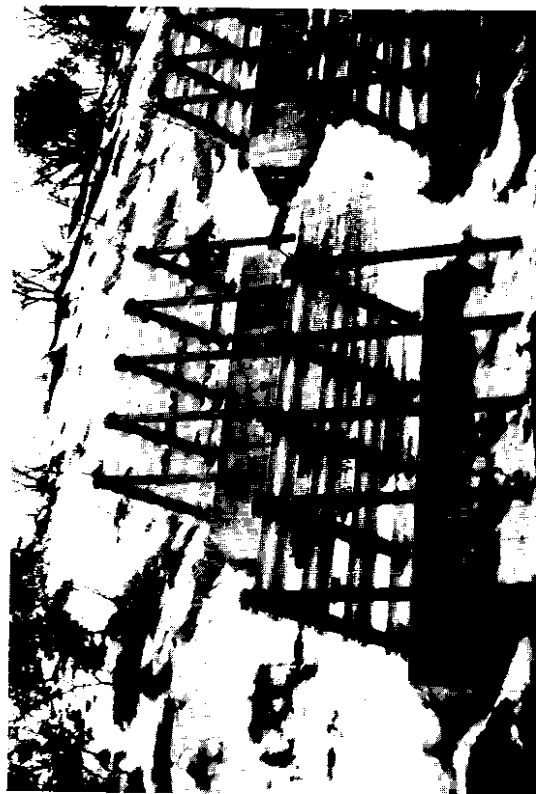

c



d

most defense systems that were observed. To a lesser degree, snow jacks (Plate 4d) are also used along road banks. The spacing in this illustration indicates the jacks are aimed at anchoring wet snow to the ground; they would be largely ineffective against soft slab release. In some localities of the Japanese Alps, individual supporting structures are located in gulleys among thick timber stands where avalanche release would not ordinarily be expected.

An incidental item of interest is the market pole in the foreground of Plate 4a (also in the middle distance). The arrow points to the road margin as a guide for snow plows and is equipped with reflectors for easy visibility at night. Markers of this type are used extensively on the highways of Hokkaido. They are removed in the spring.

Snow Sheds:

Snow sheds are extensively used, and the structural details vary widely according to snow conditions and size of the avalanche path. A useful innovation is the tunnel-liner type of shed (Plate 5a) used to eliminate nuisance sluffs in deep road cuts. Steel, concrete, and combinations of these are used variously according to expected impact forces and economic considerations at the site (Plates 5b, 5c, 5d).


Some unique experimental designs of snow sheds are presently being tested. The shed shown in Plates 6a and 6b was just constructed and had not yet sustained a major avalanche impact. Concrete is used for the uphill abutment where most of the impact force would be expected, while the rest of the shed is made up of steel arches to conserve material and costs. This shed probably will be effective against smaller avalanches, but may well be damaged by very large, high-velocity ones (only the former kind normally fall at this site). A still more unusual design is the one located on the east side of Nakayama Pass in Hokkaido (Plate 6c). The cantilevered snow shed was built to avoid a serious




b



d

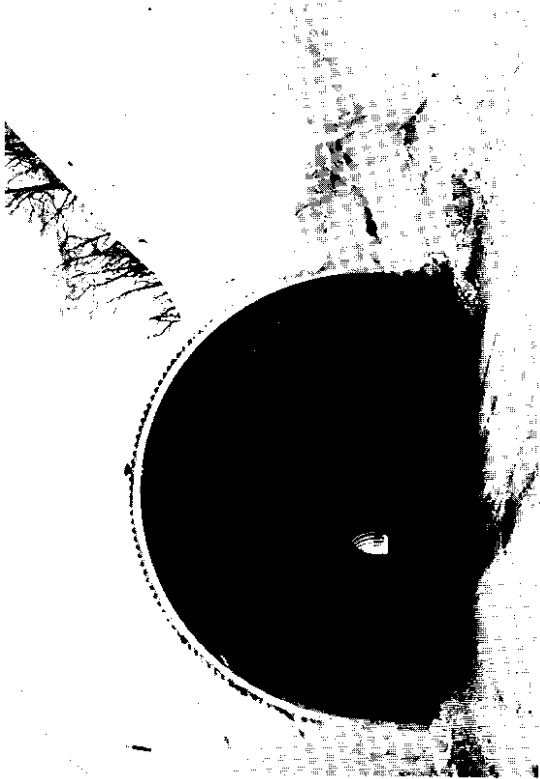


a

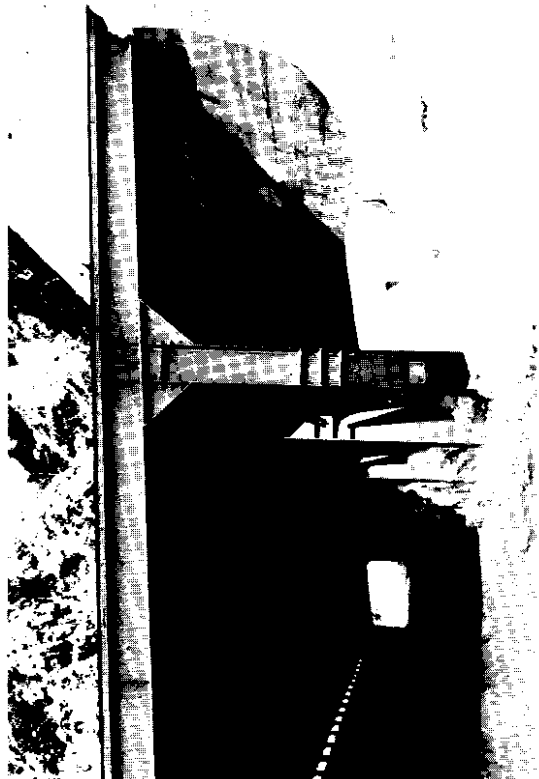

c

Plate 5

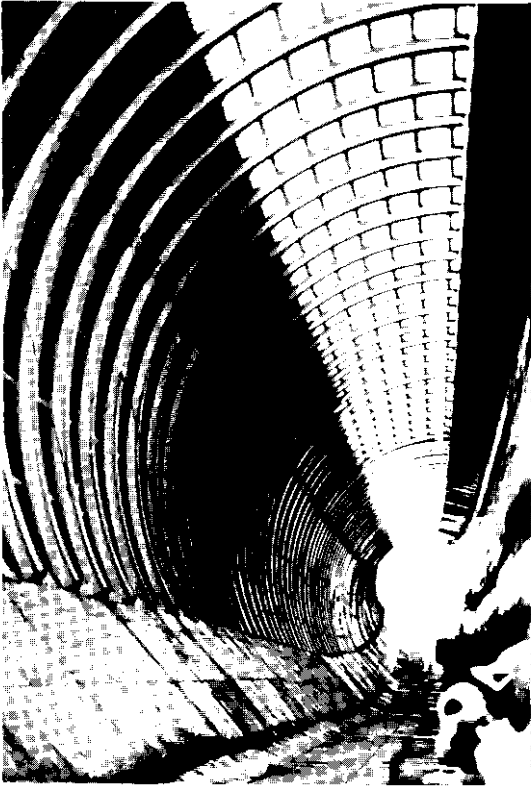


b



d




a

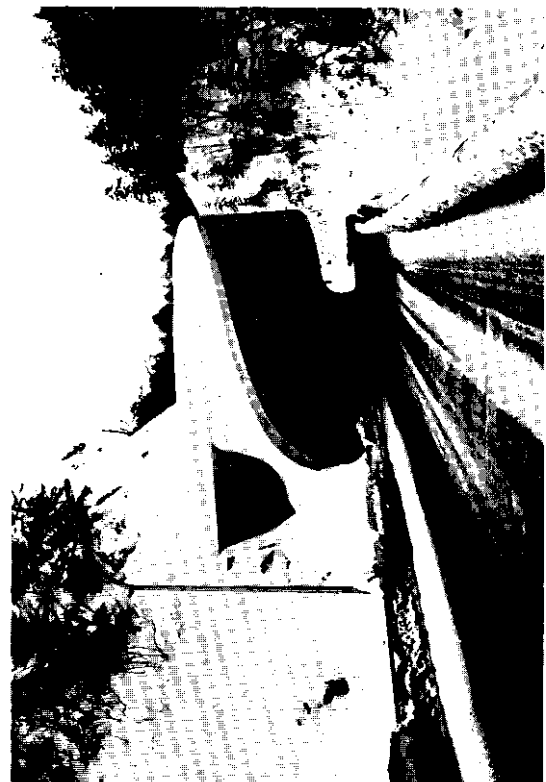

c

Plate 6

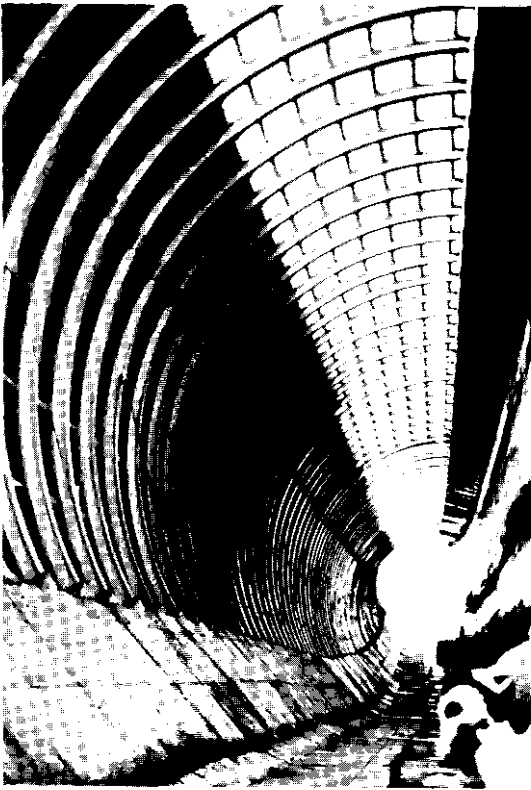


b



d



a

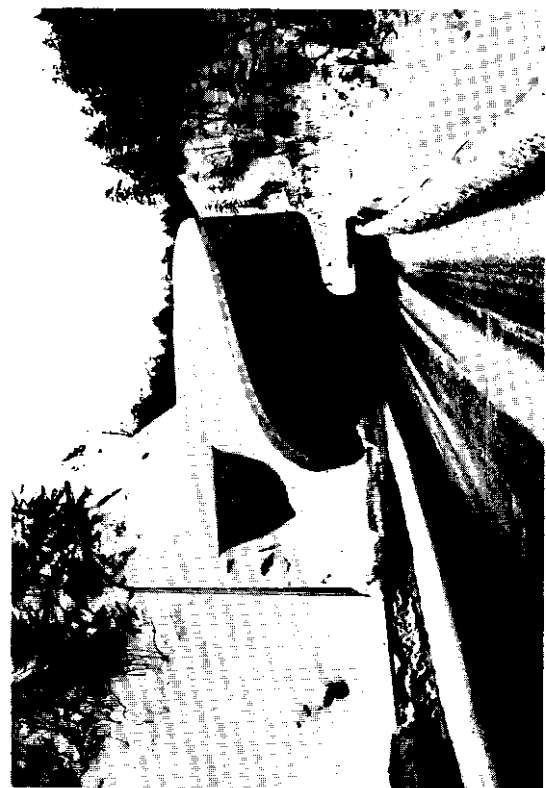

c

Plate 6

foundation problem on the downhill side of the road. This one also has yet to pass the test of a severe avalanche. Plate 6d illustrates an elegant solution to a combined problem of poor road foundation and a short avalanche slope at one end of a highway bridge.

Avalanche Dams:

The frequent occurrence of wet snow avalanches invites the use of avalanche barriers or dams, which are much more effective against wet snow sliding along the ground than against high velocity dry snow accompanied by a dust cloud. Such structures in Japan are usually constructed of masonry or reinforced concrete at the foot of narrow gulleys where wet snow avalanches occur at least annually. Two examples are shown in Plates 7a and 7b. The one in Plate 7b is of recent construction. The holes allow discharge of flood water during spring run-off. This is an exceptionally massive dam at the foot of a rather long gully -- it has not yet sustained a full-load test from a major avalanche.

By way of collateral information, the rip-rap in the foreground of Plate 7a is a common pattern in Japan. The elements are pre-cast of concrete. This rip-rap faces the approach to a snow shed.

Snow Fences:

Though not usually associated with avalanche control directly, snow fences are widely used for the customary purpose of snow drift management along highways and railways. The most common type is made of netting suspended from poles, an economical arrangement which can readily be erected in the fall and taken down each spring. A variation used in parts of Honshu utilizes rice straw mats instead of nets. A more permanent type used in the heavier snow zones consists of perforated steel panels which can be raised by sliding them up steel supporting poles to adjust to accumulating snow.



b



d



a



c

PART 2

The Mechanics of Slab Avalanching and the State of Stress in Fallen Snow


A recent paper on snow slab failure³ provides an avalanche model falling into four parts:

- a) Shear failure at the snow-ground or snow-snow interface
- b) Tensile failure at the slab top
- c) Shear failure at the slab sides
- d) Compression failure at the slab bottom

These regions are indicated in Fig. 1. The physical reasons for the snow-ground or snow-snow interface shear failure have been dealt with³; the subsequent behavior is a consequence of this initial shear degeneration. Unfortunately, the above models could not be developed into a complete theory because no adequate way of predicting the stress distribution in the snow slab prior to avalanching appeared to be available. Therefore, only order of magnitude arguments were used to examine the consequences of the model. In spite of this restriction, the results proved encouraging.

In this paper a method of incremental analysis developed for accreting bodies is used to determine the initial state of stress in fallen snow;⁴ it thus corresponds most closely in nature to conditions for soft slab avalanches originating in new fallen snow. The basic analysis is for uniform cover of a plane surface of constant slope, but the effect of curvature is examined by considering uniform accretion on a spherical surface. Non-uniform coverage is also investigated.

The shear stresses over a part of the interface are then released, and the subsequent forms of failure at the top, sides and bottom described. The bottom failure can be due to buckling or fracture⁵. Both modes are examined.

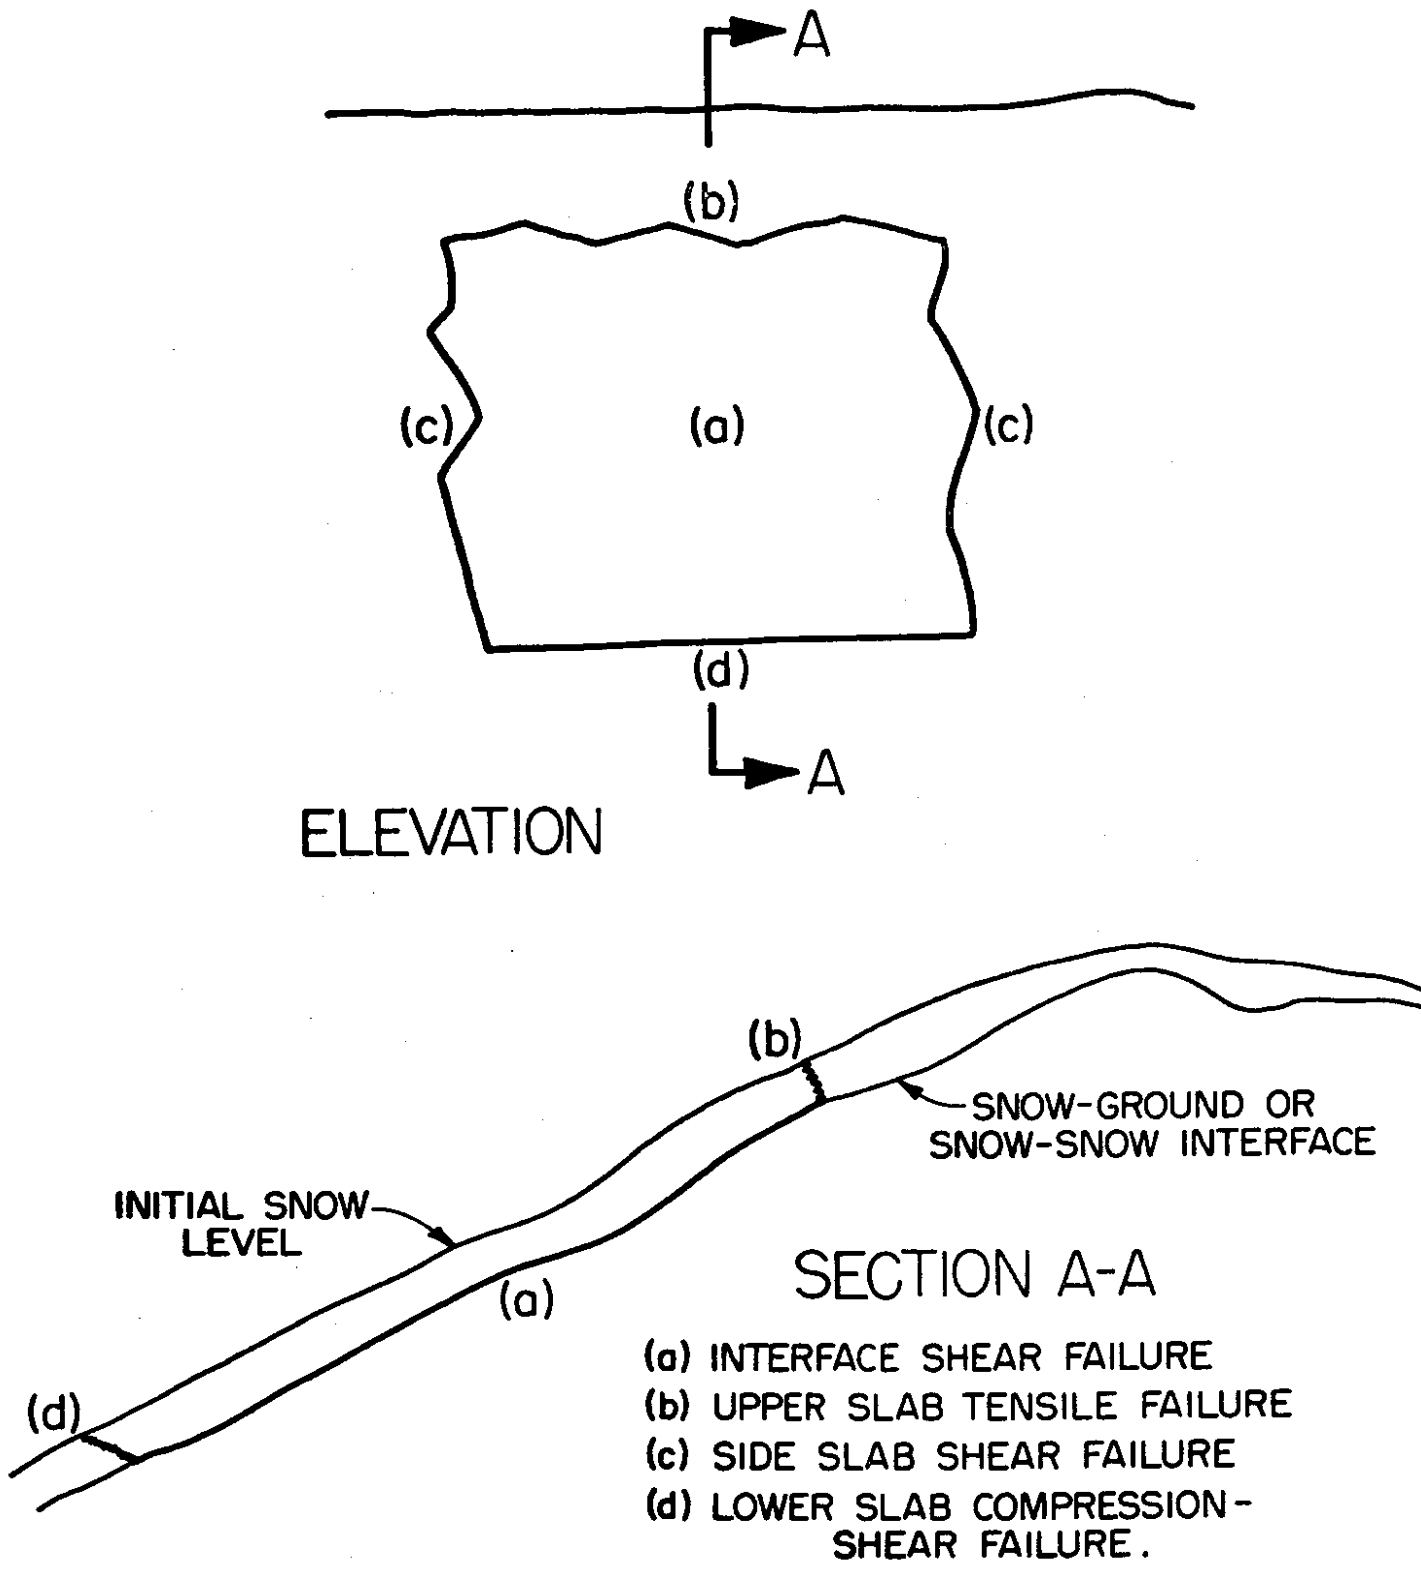

Slab Avalanche Failure Modes

FIG. 1

The consequences of the theory are slab dimensions (length and breadth) in terms of the thickness, slope, snow density and mechanical properties.

These dimensions are consistent with observed slab behavior and suggest that the Perla-LaChapelle approach is valid.

One concept of metamorphosis involves a shear strength degeneration along a layer. This layer may be located at the ground-snow interface, at an interface between new and old snow or at some other surface in the snow thickness. The cause of the metamorphosis may be crystal metamorphism, e.g. the development of depth hoar, or some completely different phenomenon such as lubrication of the interface by percolating meltwater. The origin of metamorphosis is not, in fact, germane to the arguments of this paper and the term will be used to describe any shear degeneration.

IDEALIZATION

The varied physical conditions of snow and avalanche terrain have to be idealized in order that an analysis can be generated. Here we consider initially an infinite, uniform, rigid surface of angle θ on which snow is continuously deposited to a depth t . In nature this surface may be either the ground or an old snow surface. It is referred to here as the ground for convenience. The coordinate x_1 is on the snow-ground interface, and x_2 is the normal so that the snow surface is $x_2 = t$. These matters are illustrated in Fig. 2. The snow density as deposited is $\rho(x_2)$, the modulus of elasticity E , Poisson's ratio ν (λ and μ are the equivalent Lamé constants). The stresses in the deposited snow are $\sigma_{ij}(x_1, x_2)$. Metamorphosis over a region $-D \leq x_1 \leq D$ changes this stress state to $\Sigma_{ij}(x_1, x_2)$ where


$$\Sigma_{ij}(x_1, x_2) = \sigma_{ij}(x_1, x_2) + \tau_{ij}(x_1, x_2) \quad (1)$$

when $\sigma_{12}(x_2=0)$ is smaller than the new shear strength.

τ_{ij} is the state of stress associated with the reduction of shear capacity at the metamorphosed region to a value below that of the initial shear stress.

When metamorphosis occurs above the interface, a distance t' below the surface ($t' < t$), then t' should replace t in all subsequent analysis.

The strengths of the snow in tension, compression and shear are Σ_1, Σ_2 and Σ_3 respectively. Complete failure of the snow slab is manifested by an avalanche of breadth $2B$. The length is assumed to be bounded by $x_1 = \pm D$. The snow is assumed to behave linearly elastically and the ground to be rigid. σ_{ij} is first described, and then the effect of the change on the interface is evaluated in order that Σ_{ij} can be compared to snow strengths Σ_1, Σ_2 , and Σ_3 .

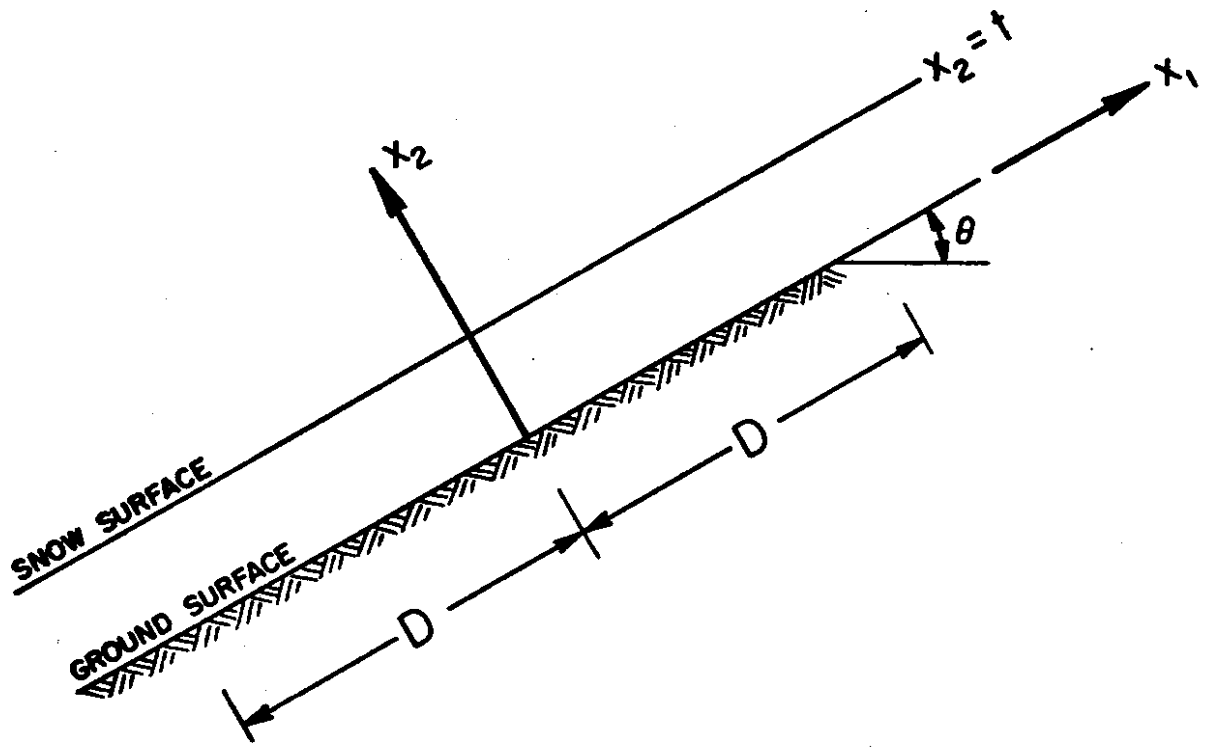

Idealized Plane Geometry

THE INITIAL STATE OF STRESS

It is first assumed that snow is deposited uniformly to a final depth, t , on a rigid infinitely extending uniform slope (Fig. 2). At some time in this accretion process, snow is at a depth α as shown in Fig. 3. An increment of thickness $\Delta\alpha$, density $\rho(\alpha)$ is added. Initially interest is in the incremental stresses, $\Delta\sigma_{ij}$, at $x_2 < \alpha$ due to this addition. The analysis follows that of Brown and Goodman,⁴ 1963.

The incremental loading at $x_2 = \alpha$ is separated into normal and shear parts as shown in Fig. 3. The incremental boundary conditions are, for normal loading,

$$x_2 = \alpha; \quad \Delta\sigma_{22} = -\rho\Delta\alpha \cos \theta \quad (2)$$

$$\Delta\sigma_{12} = 0$$

$$x_2 = 0; \quad \Delta u_1 = \Delta u_2 = 0$$

and, for shear loading,

$$x_2 = \alpha; \quad \Delta\sigma_{22} = 0 \quad (3)$$

$$\Delta\sigma_{12} = -\rho\Delta\alpha \sin \theta$$

$$x_2 = 0; \quad \Delta u_1 = \Delta u_2 = 0.$$

Considering the normal loading case, the infinite extent of the region requires that

$$\Delta\epsilon_{11} = \Delta\epsilon_{33} = 0. \quad (4)$$


Using the constitutive law

$$\Delta\sigma_{ij} = \lambda\Delta\epsilon_{kk} \delta_{ij} + 2\mu\Delta\epsilon_{ij} \quad (5)$$


the state of stress is bound to be

$$\frac{1}{k} \Delta\sigma_{11} = \frac{1}{k} \Delta\sigma_{33} = \Delta\sigma_{22} = -\rho\Delta\alpha \cos \theta \quad (6)$$


$$\Delta\sigma_{ij} = 0, \quad i \neq j$$

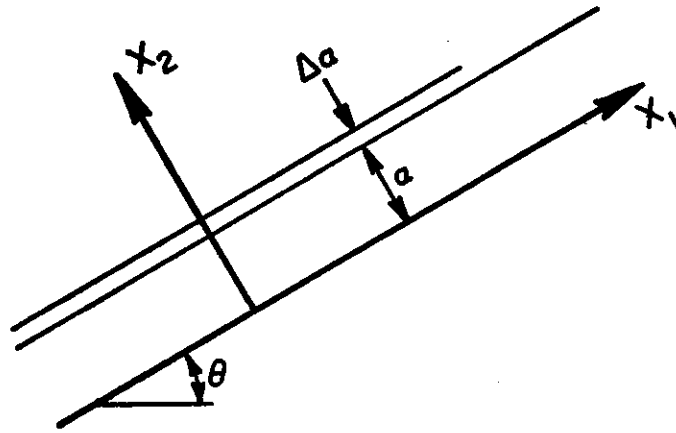

GEOMETRY

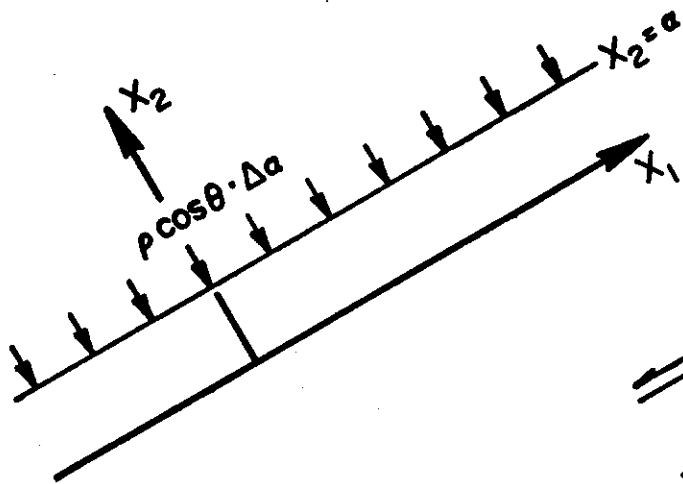

NORMAL LOADING

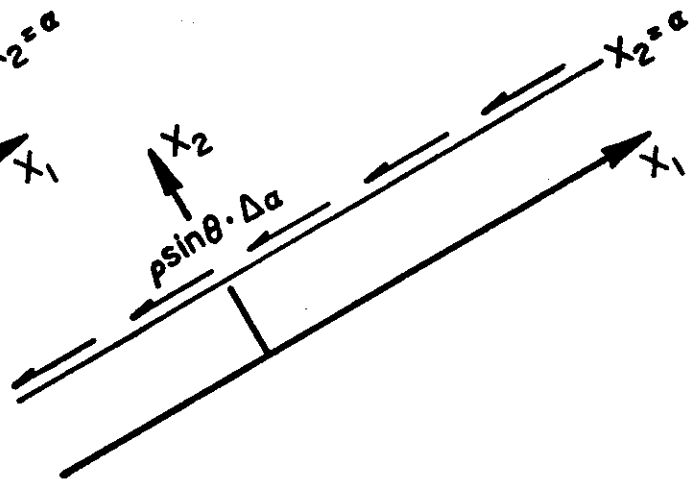

SHEAR LOADING

Geometry and Incremental Loading Conditions

Fig.3

where

$$k = \frac{\lambda}{\lambda + 2\mu} = \frac{\nu}{1-\nu} \quad (7)$$

The solution for the increment of shear loading is

$$\Delta\sigma_{12} = -\rho \Delta \alpha \sin \theta \quad (8)$$

$$\Delta\sigma_{ij} = 0, \quad i \neq 1, j \neq 2$$

Since the snow is added from $\alpha = 0$ to $\alpha = t$, the final stress state is obtained by summing these incremental stresses. Analytically this is done by shrinking $\Delta \alpha$ to the limit and integrating so that

$$\sigma_{ij}(x_i) = \int_{x_2}^t d\sigma_{ij}(\alpha) \quad (9)$$

For uniform snow density (9) with (6) and (8) gives

$$\begin{aligned} \sigma_{11} &= \sigma_{33} = \frac{-\nu}{1-\nu} \rho \cos \theta (t-x_2) \\ \sigma_{22} &= -\rho \cos \theta (t-x_2) \\ \sigma_{12} &= -\rho \sin \theta (t-x_2). \end{aligned} \quad (10)$$

It should be noted that the results of (10) may be obtained directly by treating the weight as a body force applied to the entire thickness. Such is not generally the case for such accretion problems however, as may be shown for the subsequent analysis where some consequences of relaxing the assumptions on geometry and density are considered.

a) Variation of Snow Density.

The density of the deposited snow may vary with the depth. Such a variation can be expressed by

$$\rho(\alpha) = \sum_{i=0}^{\infty} \rho_i \alpha^i \quad (11)$$

This leads to

$$\begin{aligned}\sigma_{11} &= \sigma_{33} = \frac{-\nu}{1-\nu} \cos \theta \sum_{i=0}^{\infty} \frac{\rho_i}{i+1} (t^{i+1} - x_2^{i+1}) \\ \sigma_{22} &= -\cos \theta \sum_{i=0}^{\infty} \frac{\rho_i}{i+1} (t^{i+1} - x_2^{i+1}) \\ \sigma_{12} &= -\sin \theta \sum_{i=0}^{\infty} \frac{\rho_i}{i+1} (t^{i+1} - x_2^{i+1})\end{aligned}\quad (12)$$

where (10) is the solution for $i=0$. The density variation due to consolidation by itself does not affect the initial state solution. However, such an effect would mean that λ and μ depend on α in the incremental constitutive law, which would then modify the form of (12).

b) Curvature of the Ground Surface

This is examined by extending the previous analysis to the case where the ground surface is spherical. In order to examine the effect of curvature on the initial stress state radial loading only is taken into account.

The perfectly flat geometry previously discussed can be modified to the convex or concave spherical shapes of Fig. 4. The rigid surface is at r_0 and the snow deposit of thickness $\Delta\alpha$ is at $\alpha \cdot r_0$, α and r , the generic position, are surfaces of concentric spheres. The requirement of (4) becomes


$$\Delta u_{\theta} = \Delta u_{\phi} = 0 \quad (13)$$

in spherical coordinates, and only Δu_r exists. These conditions provide point symmetry and increment of radial displacement, Δu_r , is governed by the Lamé equation of elasticity


$$\left(\Delta u_{r,r} + \frac{2\Delta u_r}{r} \right)_{,r} = 0 \quad (14)$$

This has a solution

$$\Delta u_r = Br + \frac{C}{r^2} \quad (15)$$

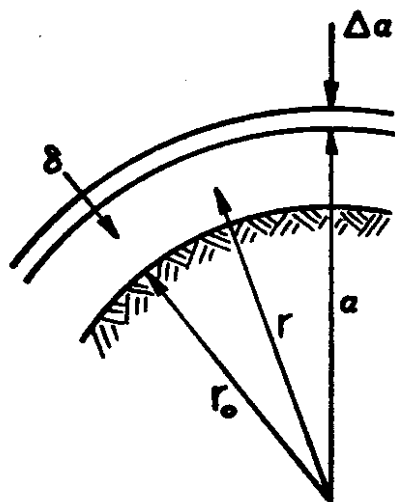

CONVEX

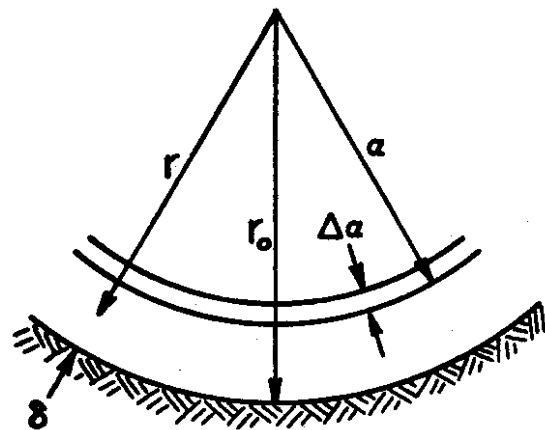

CONCAVE

Spherical Ground Geometry & Incremental Conditions

FIG 4

The incremental boundary conditions are

$$r = r_o; \quad \Delta u_r = 0 \quad (16)$$

$$r = \alpha; \quad \Delta \sigma_{rr} = -\rho \Delta \alpha$$

where

$$\Delta \sigma_{rr} = (3\lambda + 2\mu)B - \frac{4C\mu}{r^3} \quad (17)$$

The incremental solution is then

$$\Delta u_r = \frac{\rho \alpha^3 r}{(3\lambda + 2\mu)\alpha^3 + 4\mu r_o^3} \left\{ \left(\frac{r_o}{r}\right)^3 - 1 \right\} \Delta \alpha$$

$$\Delta \sigma_{rr} = \frac{-\rho \alpha^3}{(3\lambda + 2\mu)\alpha^3 + 4\mu r_o^3} \left\{ 3\lambda + 2\mu + 4\mu \left(\frac{r_o}{r}\right)^3 \right\} \Delta \alpha \quad (18)$$

$$\Delta \sigma_{\theta\theta} = \Delta \sigma_{\phi\phi} = \frac{-\rho \alpha^3}{(3\lambda + 2\mu)\alpha^3 + 4\mu r_o^3} \left\{ 3\lambda + 2\mu - 2\mu \left(\frac{r_o}{r}\right)^3 \right\} \Delta \alpha.$$

Final stresses are found by integration, i.e.

$$\sigma_{ij} = \int_r^{r_o \pm t} d\sigma_{ij}(\alpha) \quad (19)$$

where in the above, and also subsequently, the upper sign refers to the convex shape and the lower sign to the concave. Stresses are

$$\sigma_{rr} = -P \left\{ 3\lambda + 2\mu + 4\mu \left(\frac{1}{q}\right)^3 \right\} \quad (20)$$

$$\sigma_{\theta\theta} = \sigma_{\phi\phi} = -P \left\{ 3\lambda + 2\mu - 2\mu \left(\frac{1}{q}\right)^3 \right\}$$

where

$$P = \frac{\rho r_o}{3(3\lambda + 2\mu)} \left\{ 3(1+p-q) - G \left[\frac{1}{2} \ln \frac{(G+1+p)^2(G^2 - Gq + q^2)}{(G^2 - G<1+p> + <1+p>^2)(G+q)^2} \right. \right. \\ \left. \left. + \sqrt{3} \tan^{-1} \frac{2(1+p)-G}{\sqrt{3} G} - \sqrt{3} \tan^{-1} \frac{2q-G}{\sqrt{3} G} \right] \right\} \quad (21)$$

and

$$G^3 = \frac{4\mu}{3\lambda+2\mu} = \frac{2(1-2\nu)}{1+\nu}, \quad p = t/r_0, \quad q = r/r_0.$$

Of particular interest is the ratio $\frac{\sigma_{\theta\theta}}{\sigma_{rr}}$ for small curvature. This may be found by substituting

$$r = r_0 \pm \delta \tag{22}$$

into (20) and expanding. Retaining only terms linear in $\frac{\delta}{r_0}$ there results

$$K = \frac{\sigma_{\theta\theta}}{\sigma_{rr}} = \frac{\nu}{1-\nu} \pm \frac{(1+\nu)(1-2\nu)}{(1-\nu)^2} \cdot \frac{\delta}{r_0}. \tag{23}$$

The ratio given by (10) is thus corrected for curvature. As opposed to the flat case, the value of K varies with position in the snow. At $\delta = 0$, $K = k$; this value increases with distance from the interface for convex shapes and decreases for concave shapes. However, the sensitivity in ranges of $\frac{\delta}{r_0}$ of interest is negligible compared to the quality of idealization already posed.

c) Non-Uniform Snow Deposition

This is investigated by considering snow deposition which is uniform in time but which increases linearly with x_1 so that the final depth, t , is given by

$$t = t + A \frac{x_1}{D}.$$

The incremental loading is again separated into normal and tangential parts, and it is assumed that A is small enough so that the upper surface may be considered to remain essentially parallel to the x_1 axis.

The problem formulation is identical to that of (2) and (3) with $\rho(1+A\frac{x_1}{D})\Delta\alpha$ replacing $\rho\Delta\alpha$ as the incremental load. Solution of the elasticity

problems leads to

$$\begin{aligned}\Delta\sigma_{11} &= \frac{-v}{1-v} \rho \left(1+A \frac{x_1}{D}\right) \cos \theta \Delta \alpha \\ \Delta\sigma_{22} &= -\rho \left(1+A \frac{x_1}{D}\right) \cos \theta \Delta \alpha \\ \Delta\sigma_{12} &= 0\end{aligned}\tag{24}$$

for normal loading and

$$\begin{aligned}\Delta\sigma_{11} &= \left\{ \frac{-2x_2}{1-v} + v(1+v)(x_2-\alpha) \right\} \frac{A}{D} \rho \sin \theta \Delta \alpha \\ \Delta\sigma_{22} &= (x_2-\alpha) \frac{A}{D} \rho \sin \theta \Delta \alpha \\ \Delta\sigma_{12} &= -(1+\frac{A}{D} x_1) \frac{A}{D} \rho \sin \theta \Delta \alpha\end{aligned}\tag{25}$$

for shear loading.

The final state is determined by integration, and is

$$\begin{aligned}\sigma_{11} &= \frac{-v}{1-v} \rho \cos \theta \left(1+\frac{A}{D} x_1\right) (t-x_2) - \\ &\quad \frac{A}{D} \rho \sin \theta \left\{ \frac{2}{1-v} (t-x_2)x_2 + \frac{v(1+v)}{2} (t-x_2)^2 \right\} \\ \sigma_{22} &= -\rho \cos \theta \left(1+\frac{A}{D} x_1\right) (t-x_2) - \frac{A\rho \sin \theta}{2D} (t-x_2)^2 \\ \sigma_{12} &= \rho \sin \theta \left(1+\frac{A}{D} x_1\right) (t-x_2).\end{aligned}\tag{26}$$

It may be seen from (26) that σ_{11} and σ_{22} contain correction terms in addition to replacing ρ in (10) by $\rho \left(1+A \frac{x_1}{D}\right)$. These corrections increase the compressive initial stress. The correction is small for typical avalanche dimensions since $A \frac{x_1}{D}$ will be of order unity and $A \frac{x_2}{D}$ will be small compared with unity.

The ratio σ_{11}/σ_{22} is given by

$$K = \sigma_{11}/\sigma_{22} = \frac{v}{1-v} \left\{ 1 + \frac{(1-v)A \tan \theta}{x_1 \left(1 + \frac{A}{D} \right)} \left\{ \frac{2x_2}{(1-v)D} + \frac{v(1+v)}{2D} (t-x_2) \right\} \right\} \quad (27)$$

$$\frac{1 + \frac{A \tan \theta (t-x_2)}{2D \left(1 + \frac{A}{D} \right)}}{1 + \frac{A \tan \theta}{x_1 \left(1 + \frac{A}{D} \right)}} \left\{ \frac{2}{v} \frac{x_2}{D} + \frac{v^2}{2} \frac{(t-x_2)}{D} \right\} \quad (28)$$

It follows from (28) that K varies along the length and through the thickness of the avalanche. For example, $K \approx k$ at the interface ($x_2=0$) and for $v = \frac{1}{4}$, $\theta = 30^\circ$, and $D/t = 8$ has a maximum value of 1.57 k at $x_1 = -D$, $x_2 = t$.

SLAB FAILURE

Knowledge of the initial state of stress allows failure conditions to be determined by calculating the additional stress induced by the reduction of the shear strength over some area of the interface. Exact three dimensional solutions based on linear isotropic elasticity are not available; even three dimensional numerical solutions are presently intractable. Accepted values for $\Sigma_1, \Sigma_2, \Sigma_3$ suggest the following order of failure: top tensile fracture, side shear fracture and bottom compressive failure. Analyses are carried out assuming a reduction to zero of the shear strength over a metamorphosed basal rectangular region ($-D \leq x_1 \leq D$, $-B \leq x_3 \leq B$) and considering each of these failure modes chronologically.

a) Upper Tensile Slab Fracture

The interface metamorphosis in the region $-D \leq x \leq D$ of Fig. 2 alters the snow stresses to Σ_{ij} as in equation (1). For zero shear capacity

at the interface τ_{ij} is obtained by considering the stresses caused by shears at $x_2=0$, $-D \leq x_1 \leq D$ given by the negative of σ_{12} ($x_2=0$) in equation (10). (See Fig. 5). The boundary conditions are

$$\begin{aligned} x_2 = t; \quad \tau_{22} = \tau_{12} = 0 \\ x_2 = 0; \quad u_2 = 0 \\ x_2 = 0, \quad -D \leq x_1 \leq D; \quad \tau_{12} = \rho \sin \theta t \\ x_2 = 0, \quad x_1 > D, \quad x_1 < -D; \quad u_1 = 0 . \end{aligned} \tag{29}$$

Because of the stress singularities at $x_1 = \pm D$, we concentrate our attention on the average tensile failure features of the top slab (Fig. 1). From the evidence of Perla and LaChapelle³ and Sommerfeld⁶, a brittle failure representation of the form

$$\int_0^t \sum_{11}(x_1 = D, x_2) dx_2 = \sum_1 t \tag{30}$$

may be employed. The components of \sum_{11} (Equation 1) are $\sigma_{11}(x=D, x_2)$ and $\tau_{11}(x=D, x_2)$.

The second component cannot be determined analytically at $x_1 = D$, but from statics and arguments of symmetry about $x_1 = 0$.

$$\int_0^t \tau_{11}(x_1 = D, x_2) dx_2 = \int_0^D \tau_{12}(x_1, x_2 = 0) dx_1. \tag{31}$$


Hence in (30)

$$\frac{-\nu}{1-\nu} \rho \cos \theta \frac{t^2}{2} + \rho \sin \theta t D = \sum_1 t \tag{32}$$

and the dimensional ratio

$$\frac{D}{t} = \frac{\sum_1}{\rho} \frac{1}{t \sin \theta} + \frac{\nu}{1-\nu} \frac{1}{2} \cot \theta. \tag{33}$$

This important ratio depends on the snow properties \sum_1 , ρ and ν , the ground slope, θ , and the snow thickness, t . The tensile strength of snow, \sum_1 , is

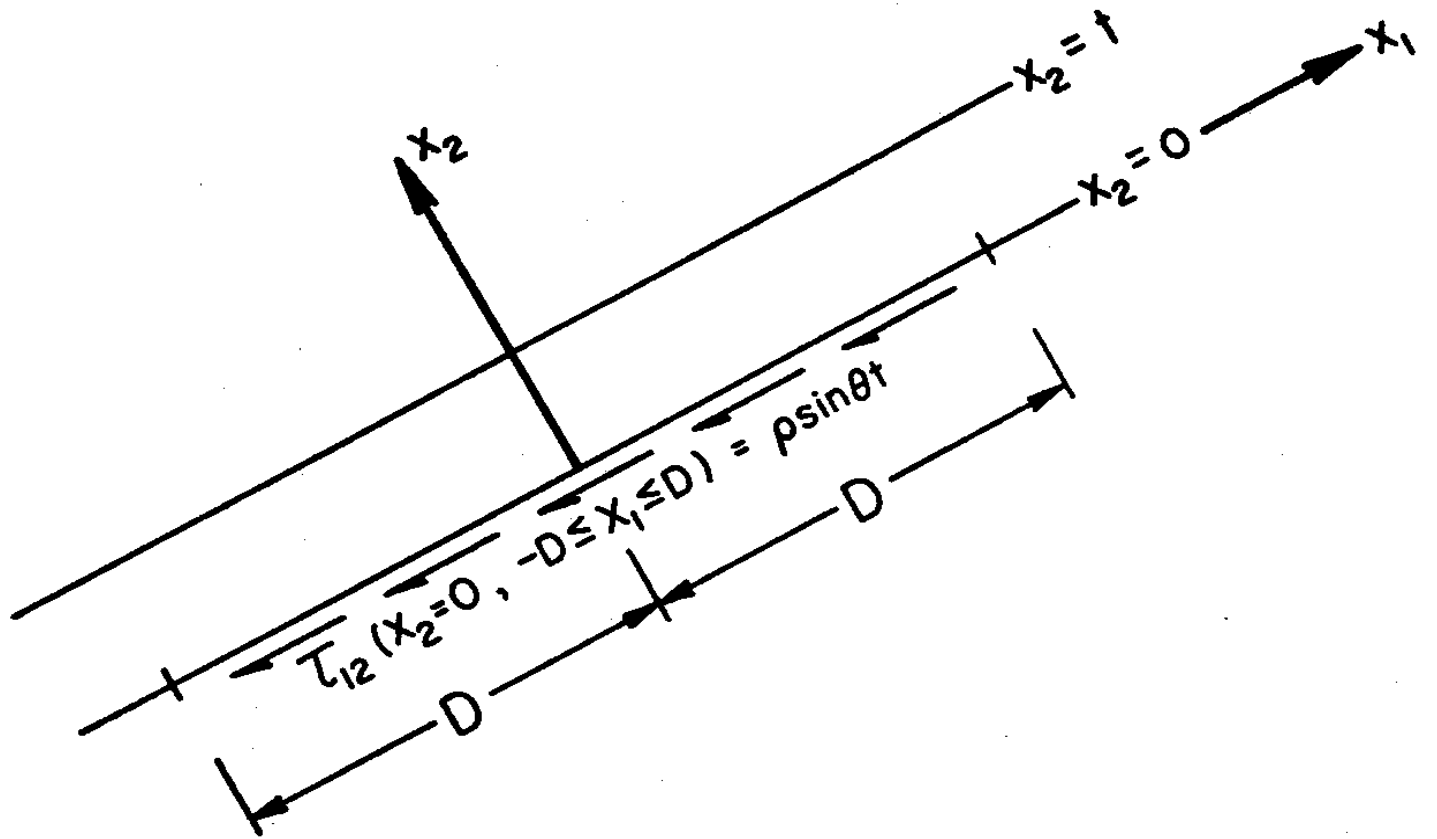

Conditions for τ_{ij}

FIG 5

dependent in part on snow density, ρ . Values of the ratio $\sum_{1/\rho}$ vary from 3.4 meters for fine grained old snow to 6 meters for coarse grained old snow⁵.

θ is usually in the range of 30° to 45°.

Poisson's ratio, ν , seems to be ill-defined but values from 0.1 to 0.4 are reported. Regardless of the values chosen, the second term of the right hand of (33) is dominated by the first. Fig. 6 shows a plot for computing D/t for various values of θ , ν and $\sum_{1/\rho}$.

σ_{11} is zero at the surface, $x_2=t$, for all shapes of surface. As stated above, the solution for τ_{11} is intractable at $x_1=D$ because of a singularity at $x_2=0$. However,

$$\tau_{11} = \rho \sin \theta D \quad (34)$$

is an excellent representation (see Discussion and Conclusions). This means that the tensile stress will be greatest at the upper surface, and incipient tensile failure in the upper slab will be indicated by surface cracking on $x_2 = t$ along the region about $x_1 = D$.

b) Side Shear Fracture


Tensile fracture along the line $x_1=D$ causes a force of magnitude $2 \sum_1 t B$, where $2B$ is the length of tensile failure in the x_3 direction, to be accommodated in shear over the region $0 < x_2 < t$, $x_3 = B$ and $-B$, and in compression over $0 < x_2 < t$, $x_1 = -D$. An upper bound on shear stress is obtained by assuming that the force is taken exclusively in shear until the full shear capacity is mobilized. Then

$$4 \sum_3 D t = 2 B t \sum_1 \quad (35)$$

and

$$\frac{B}{t} = \frac{2 \sum_3}{\sum_1} \frac{D}{t} \quad (36)$$

In most materials $\frac{\sum_3}{\sum_1} \approx \frac{1}{2}$. Interpretation of the tests⁷

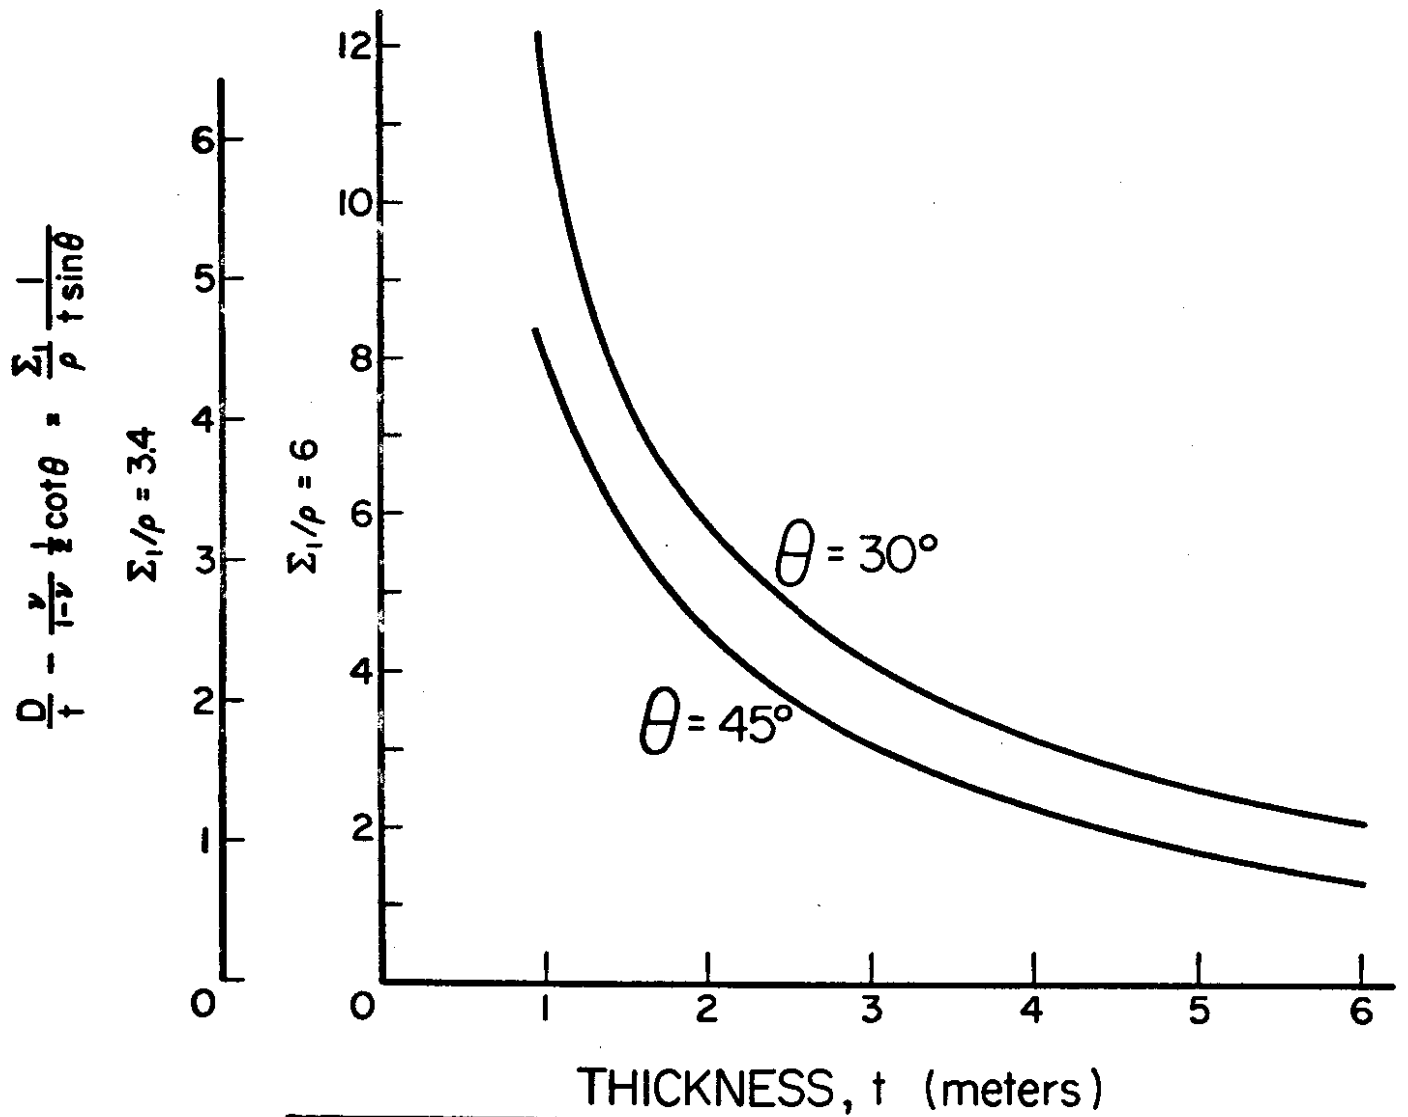

	$\frac{\nu}{1-\nu} \frac{1}{2} \cot \theta$	
	$\theta = 30^\circ$	$\theta = 45^\circ$
$\nu = 0.1$	0.097	0.055
$\nu = 0.25$	0.291	0.166
$\nu = 0.4$	0.582	0.333

Data for Computing $\frac{D}{t}$ Ratio

FIG 6

suggests a value of $\frac{2}{3}$. If any of the force $2 \Sigma_1 t B$ released by the tensile failure failure is accommodated with the bottom slab compression region, then $\frac{B}{t}$ in (37) will be increased. Thus, we would expect under all circumstances

$$B \geq D \quad (37)$$

c) Bottom Slab Compression Failure

Failure on three sides of the slab results in high compression at the lower slab, $x_1 = -D$. Two modes of failure are possible and both have been reported⁵, buckling of the slab over $x_1 \geq -D$ and compression failure at $x_1 = -D$. The latter is more common for catastrophic slab failure leading to avalanche release. Buckling is usually associated with slower deformation accompanying glide of the snow cover over the ground.

A possible buckling configuration is shown in Fig. 7, the problem being equivalent to that of a beam under the action of an end load and a distributed axial load. An approximate solution by Rayleigh's method has been found.⁸

In Fig. 7 the coordinates have been changed so that

$$\Psi = x_1 + D \quad (38)$$

$$\omega = x_2. \quad (39)$$

The deflected shape is

$$\omega = \omega(\Psi) \quad (40)$$

which must satisfy the conditions

$$\omega = 0, \quad \frac{d\omega}{d\Psi} = 0 \quad (41)$$

at $\Psi = 0$ and for $\Psi \geq L$.

The axial loading is $\rho \sin \theta t(2D - L)$ at $\Psi = L$ which describes the accumulated tangential forces over $\Psi \geq L$ and a spread axial loading $\rho \sin \theta t$ over $0 \leq \Psi \leq L$. An assumed shape that satisfies (41) is

suggests a value of $\frac{2}{3}$. If any of the force $2 \Sigma_1 t B$ released by the tensile failure failure is accommodated with the bottom slab compression region, then $\frac{B}{t}$ in (37) will be increased. Thus, we would expect under all circumstances

$$B \geq D \quad (37)$$

c) Bottom Slab Compression Failure

Failure on three sides of the slab results in high compression at the lower slab, $x_1 = -D$. Two modes of failure are possible and both have been reported⁵, buckling of the slab over $x_1 \geq -D$ and compression failure at $x_1 = -D$. The latter is more common for catastrophic slab failure leading to avalanche release. Buckling is usually associated with slower deformation accompanying glide of the snow cover over the ground.

A possible buckling configuration is shown in Fig. 7, the problem being equivalent to that of a beam under the action of an end load and a distributed axial load. An approximate solution by Rayleigh's method has been found.⁸

In Fig. 7 the coordinates have been changed so that

$$\Psi = x_1 + D \quad (38)$$

$$\omega = x_2. \quad (39)$$

The deflected shape is


$$\omega = \omega(\Psi) \quad (40)$$

which must satisfy the conditions

$$\omega = 0, \quad \frac{d\omega}{d\Psi} = 0 \quad (41)$$

at $\Psi = 0$ and for $\Psi \geq L$.

The axial loading is $\rho \sin \theta t (2D - L)$ at $\Psi = L$ which describes the accumulated tangential forces over $\Psi \geq L$ and a spread axial loading $\rho \sin \theta t$ over $0 \leq \Psi \leq L$. An assumed shape that satisfies (41) is

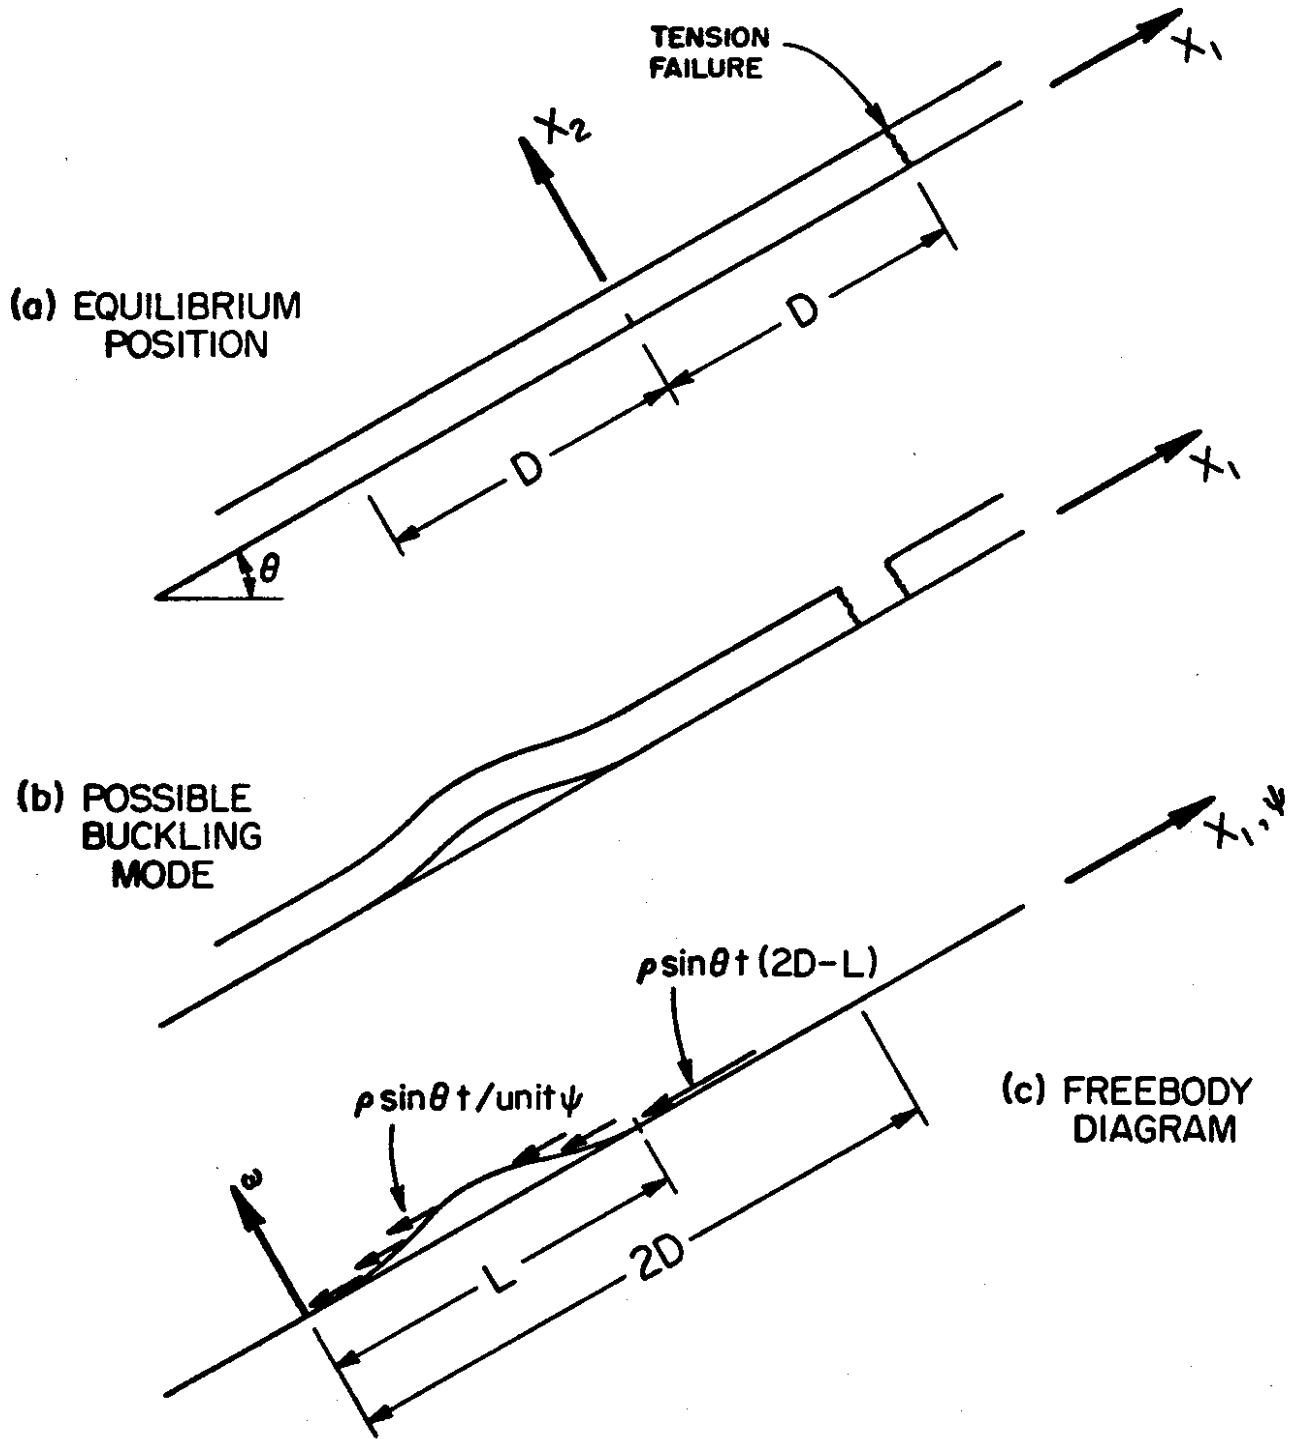

Snow Slab Buckling Configuration

$$\omega = A(1 - \cos \frac{2\pi\Psi}{L}) \quad (42)$$

which, when applied to the Rayleigh quotient, gives an upper bound

$$\rho \sin \theta t L \leq \frac{\pi^2 E t^3}{3(1-\nu^2)L^2} \left(2\frac{D}{L} - \frac{1}{2}\right)^{-1} \quad (43)$$

A stationary value of $\rho \sin \theta t L$ occurs at

$$L = 2D, \quad (44)$$

that is the whole slab will buckle rather than a portion $L < 2D$. In this case

$$2 \rho \sin \theta t D \leq \frac{\pi^2 E t^3}{6(1-\nu^2)D^2} \quad (45)$$

(45) gives snow properties ρ , ν and E for buckling given the geometry θ and t and the results of equation (33).

For compression at the bottom of the slab

$$2 \rho \sin \theta t D = \Sigma_2 t. \quad (46)$$

Therefore, from (45) buckling will occur when

$$\frac{\beta E t^3}{(1-\nu^2)D^2} < \Sigma_2 t \quad (47)$$

where β is the numerical value that insures an equality in equation(45), i.e.

$$\beta \leq \frac{\pi^2}{6}. \quad (48)$$

From (33) we may write

$$\frac{D}{t} < \frac{\Sigma_1}{\rho} \frac{1}{t \sin \theta} \quad (49)$$

and this together with (47) gives

$$\beta t^2 \sin \theta < \Sigma_2 \frac{(1-\nu^2)}{\rho^2 E} \Sigma_1^2. \quad (50)$$

Therefore,

$$t_{\text{crit}} < \sqrt{\frac{\Sigma_2}{E}} \frac{\Sigma_1}{\rho} \sqrt{\frac{(1-\nu^2)}{\beta} \frac{1}{\sin \theta}}. \quad (51)$$

The previous argument indicates an insensitivity to the value of β . Improvements may be obtained by a better description of $\omega(\psi)$. In particular, the boundary condition $\frac{d\omega}{d\psi}(\psi=L) = 0$ is unrealistic when $L=2D$. Then the boundary condition

$$\frac{d^2\omega}{d\psi^2}(\psi=L) = 0 \quad (52)$$

is appropriate; this corresponds to zero moment at the top surface. The function

$$\omega = A \left(\psi^2 - \frac{5}{3L} \psi^3 + \frac{2}{3L} \psi^4 \right) \quad (53)$$

satisfies (52) and gives a value of $\beta \approx 1.18$.

As previously discussed, $\frac{\Sigma_1}{\rho}$, varies from 3.4 to 6 meters. The ratio $\frac{E}{\Sigma_2}$ is of the order of 1000. This means that for elastic buckling the thickness must be less than about 35 cm.

Shear failure will occur at the base if

$$\Sigma_2 > \frac{1}{2} \Sigma_3 \quad (54)$$

and in this case a 45° slip plane will originate at $x_1 = -D$.

DISCUSSION AND CONCLUSIONS

The previous stress calculations were based on certain assumptions which merit further discussion. The condition of equation (4) is valid for an infinitely extending slab, but is an approximation for finite slabs. Provided the displacement vector at $x_2 = 0$ remains zero throughout the accretion, (4) still provides a very close description of the actually occurring strains. This may be understood by considering the work of Goodier⁹ who dealt with a very similar problem and showed, by use of St. Venant's principle, that ϵ_{11} and ϵ_{33} would be non-zero only in the region close to the edges of the slab.

Also important is the effect on the initial state of the viscous behavior of the snow. In fact, the state of stress given by (10) may be extended to the linear viscoelastic problem¹⁰ so that σ_{12} and σ_{22} will be as shown while σ_{11} and σ_{33} will only change through the dependence on time of Poisson's Ratio.

The significant point with regard to the initial stress state is that it is closely estimated by (10) and that the initial stress σ_{11} is compressive and increasing with snow depth.

Exact solutions for the state of stress after metamorphosis are not possible in the present model in view of the singularities at $x_1 = \pm D$. In order to justify the use of averaged stress values, a finite element analysis for the elasticity problem of (29) was carried out. The results showed that, except in the neighborhood of the points $x_1 = \pm D$, $x_2 = 0$, the stresses were essentially uniform and in addition that the average of τ_{11} over t increased uniformly from $x_1 = 0$ to $x_1 = D$ and then died away in a distance of approximately $2t$ beyond $x_1 = D$. Such analysis justifies the approach of Section IV in determining the avalanche conditions. For a finite width slab, the dimensional

ratio D/t is underestimated by (33) since no contribution from the shear along the sides is taken into account.

On the basis of the considerations of mechanics in previous sections, certain conclusions can be drawn with regard to slab avalanche release. The dimensional quantities D and B provide limiting dimensions for the avalanche slab. A lower bound on the length, $2D$, necessary for top tensile fracture is given by (33) and is shown in Fig. 6. This length, which depends on snow thickness, properties and slope, is the extent of up slope metamorphosis necessary for superficial cracking to occur at the top of the potential slab avalanche. The initial state of stress is one of compression, and because this compression increases with depth, it is to be expected that the tensile cracks will initiate at the surface of the slab.

The lateral extent of the tensile crack is expected to correspond approximately to the breadth of the metamorphosed region. The preceding analysis provides a lower bound, but not an upper bound, to the breadth of any subsequent avalanche. If the breadth of the metamorphosed region is less than $2D$, then no side shear and avalanching will occur. The assumptions made concerning the shear transmittal in the derivation of equation (37) are extreme. Any accommodation, by compressive stress at the bottom, of the force released when the top cracks, will require $B > D$ for side shear failure.

The conclusion that B must exceed D for slab avalanche release is consistent with observations. Snow slabs wider than they are long are observed, sometimes the width greatly exceeds the length. Slabs longer than wide have not been observed. Table 1 shows a compilation of B/D values for observed avalanches. For the values in the table

$$2.5 < B/D < 10.7$$

with an average figure of 4.7. These observations conform to the theory, particularly since there is no theoretical upper bound to slab avalanche width. They do suggest that bottom compression plays a considerable role in determining the minimum width for side shear failure. This is confirmed by an observation near Silverton, Colorado, (December 1971) of an area where a slab avalanche had occurred/ ^{which} showed that a zone of highly compressed snow existed just below the bottom. It should be noted that the values in Table 1 are for fallen slab avalanches rather than states where just top tensile and side shear failure has occurred.

Complete failure by slab avalanching requires failure at the bottom, and as shown this will in general be by shear-compression rather than by buckling. If avalanching does not occur immediately after side shear failure, then only a change in snow properties can result in subsequent avalanching for the same snow layer. Observations indicate that slabs which fracture but do not fall normally stabilize in place and fail to generate avalanches. On a non-uniform slope, the viscoelastic character of the snow will cause amplification of any initial irregularity in conjunction with glide. What is probably the result of such deformation is shown in Plate 8. Although immediate avalanching may not occur, such uplift would seem to be a danger indicator. The condition in Plate 8. was accompanied by a separation of some two meters in the tension zone. Such "glide cracks" are common in isothermal snow.

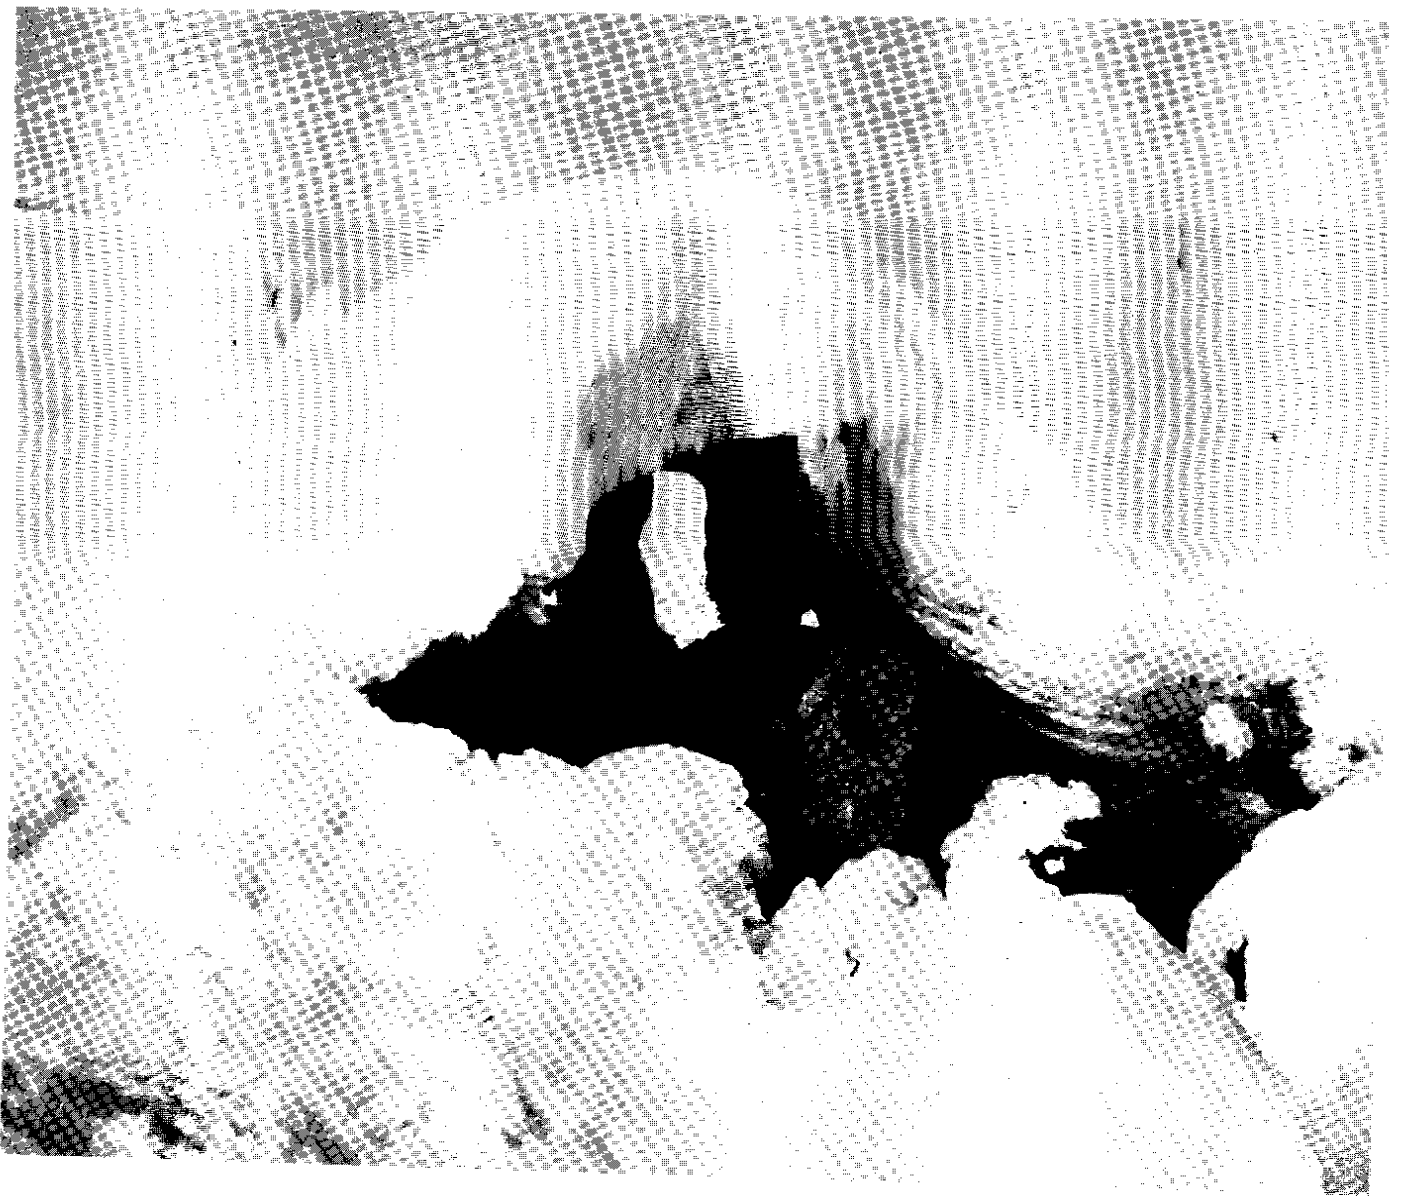


Plate 8

Possible Creep Buckling Mode

TABLE 1.

Observed Values of B/D in Actual Avalanches

<u>B</u>	<u>2D</u>	<u>B/D</u>
20	8	5.0
13.5	8	3.4
10	6	3.3
13	8	3.2
9	2.5	7.2
9	8	2.3
14	11	2.5
20	9	4.4
16	7	4.6
18	6	6.0
10	4	5.0
2.5	2	2.5
10.5	4	5.3
9.5	3	6.3
19	12	3.2
7	3	4.7
4.3	2.5	3.4
2	1.6	2.5
10	7	2.9
5	3	3.3
2.8	2	2.8
8	1.5	10.7
4	1.8	4.4
7	3.5	4.0
3	0.7	8.6
5.5	2	5.5

Sources for the dimensions in this Table are photographs, principally from copies of "Schnee und Lawinen in den Schweizer Alpen," published annually by the Swiss Federal Institute for Snow and Avalanche Research and the collection of E. R. LaChapelle.

Mechanical Parameters of Snow

Snow Glide.

Snow glide is the movement of the entire snow cover over the ground. During the winter of 1971-72 measurements of snow glide were conducted at ten different sites in the Cascades. The sites were selected to sample varied compass bearings and ground-surface vegetation conditions. Five of the sites were in the Stevens Pass area, and the remaining five were in the vicinity of Cascade Field Station and Mt. Baker ski area.

The basic method of measuring the glide is by recording the time-history of the motion of a metal glide shoe placed on the ground before the first snow-fall. Results showed that throughout the winter one to two feet of glide is to be expected depending on compass bearing and vegetation pattern. In general, south and west facing slopes showed more glide than north facing slopes. Timbered or brushy slopes yielded less glide than smooth or grassy slopes.

Figure 8 shows typical glide data collected at sites #2 and #3 at Mt. Baker. Site #2 is a south facing slope in timber while site #3 is a south facing slope with small brush and some grass. These data are quite typical of other data collected at Mt. Baker.

In general, the highest glide velocities were obtained at the beginning of the winter with a steady decline throughout the winter. The high velocities in early winter may be attributed to a lubrication of the snow-ground interface by melting snow at the bottom of the snowpack due to escape of heat stored in the ground during the summer and fall.

Another prominent feature of the snow glide data is the presence of strong peaks during periods of rainfall in late winter. These peaks appeared to be more pronounced for smooth slopes than for timbered or brushy slopes.

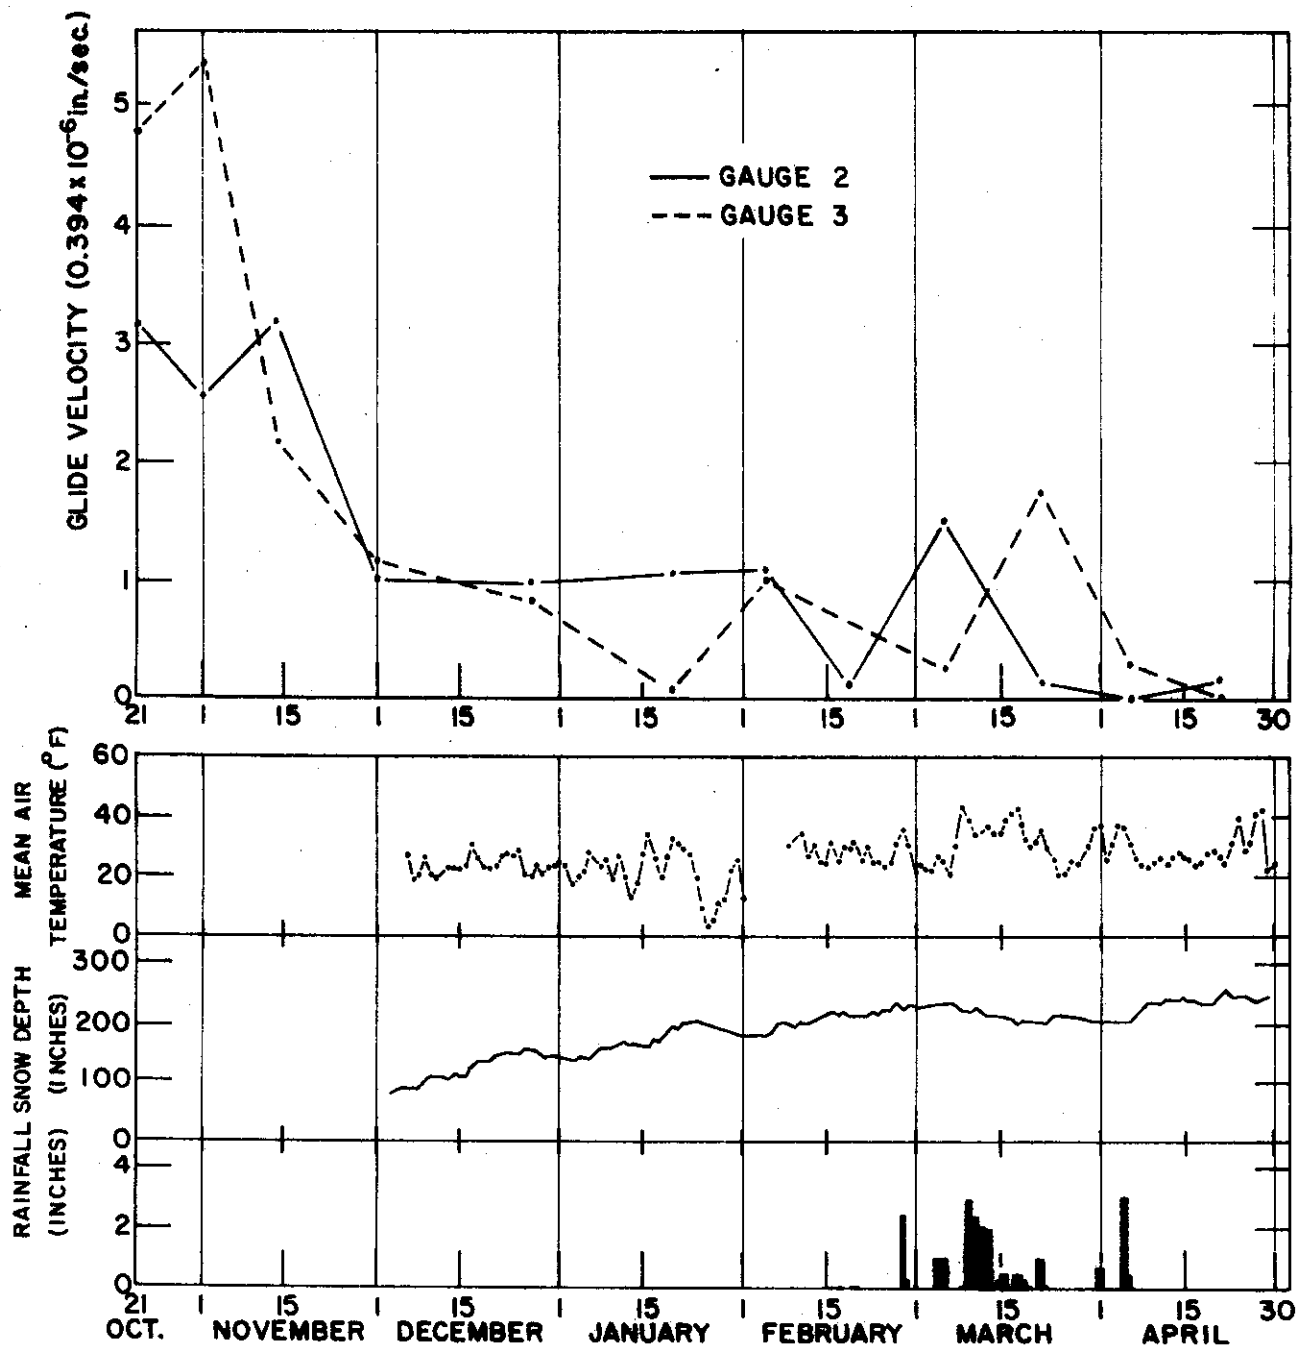


Fig. 8- Typical Glide and Meteorological Data from Sites
Near Cascade Field Station, 1971-1972.

This effect may be an important consideration for the design of avalanche defenses in the North Cascades. Since rainfall usually comes in late winter when the snow depths are large, it is to be expected that stresses on defenses due to glide may be large during this period.

Snow Creep.

Snow creep is the result of shear deformation and settlement in the interior of the snow pack. Creep measurements were carried out throughout the spring of 1972 on the same slopes that glide measurements were made at Stevens Pass and Mt. Baker. This enabled a comparison of the rate of shear deformation and settlement within the snow pack with the rate of glide over the ground.

The method used in the creep experiments was an examination of the deformation of vertical sawdust columns placed in the snow pack. The duration of the experiments was typically two months.

The experiments showed that the velocity due to shear deformation was of the same order of magnitude as the velocity due to glide during the experiments. Settlement is more difficult to assess by this method since the results are complicated by ablation of the snow at the surface. Accordingly, snow settlement experiments are planned for the winter of 1972-73 to complement the sawdust column experiments. These experiments should together yield a solid quantitative definition of the creep processes in the snow pack for the Cascades.

Since velocities due to creep deformation in the snow pack are of the same order of magnitude as glide velocities, it is apparent that for avalanche defense design the stresses due to snow creep as well as for snow glide must be taken into account. This result is also evident from the work of Swiss engineers concerned with defenses.

Measurements of Snow Strength

An important input to understanding the stability of snow slabs with regard to slab avalanches is the failure strength of the snow. Accordingly, in-situ measurements of the strength of the snow were made at Cascade Field Station near Mt. Baker during the 1971-72 winter.

These measurements were attempted by a new method which utilized large tilting tables. The great advantage of the method is that it enables large samples of snow to be used. This feature is deemed to be essential to reduce the large scatter in the data gained by previous methods.

The warm character of the 1971-72 winter presented unexpected problems with the experiments which were rectified by the end of the season. In addition, it was evident that a slight modification was needed to enable sampling of the lowest density snow.

The data taken during the 1971-72 season show less scatter than previous in-situ measurements, thus perhaps indicating that the basic method is adequate. The number of data points obtained and the lack of data in the important low density range seem to indicate a need for more experiments before a definite appraisal of snow strength can be made, however. Accordingly, another series of experiments is planned for the winter of 1972-73.

PART 4.

1971-1972 Snow Report on the North Cascades

The 1971-1972 winter was, along the North Cascades Highway as well as throughout the Washington Cascades, a severe one with respect to the large amounts of snowfall and the great amount of avalanche activity which took place. The charts on the following pages summarize the observed weather and slide activity for this winter on the section of SR-20 between Washington Pass and Early Winters.

Figures 9 and 10 show the 24 hour maximum and minimum temperatures which were observed at three places along the highway. Daily temperature observations were made at Early Winters (elevation 2200 feet), about three miles west of Mazama at the mouth of the Early Winters Canyon. Temperature observations were also made at Cutthroat Creek (elevation 4000 feet) at the times when the observer was present. In addition, a thermograph was in operation at Washington Pass (elevation 5500 feet), from which daily maximum and minimum temperatures have been extracted and are produced in Figure 10.

The record at Early Winters exhibits a wide range of temperatures. There were many sub-zero days as well as many in which above freezing temperatures were recorded.

Although the intermittent Cutthroat Creek record appears to show less amplitude of diurnal temperature fluctuations, a day by day examination reveals that corresponding temperature observations at the Early Winters Station were usually quite comparable in magnitude and range. (The observations at Cutthroat Creek usually were made during storm periods when cloudiness may have prevented radiative heating and cooling from playing a large role in widening the daily temperature range.) However, a fairly large number of above freezing temperatures were reported at the 4000 foot station.

FIGURE 9.


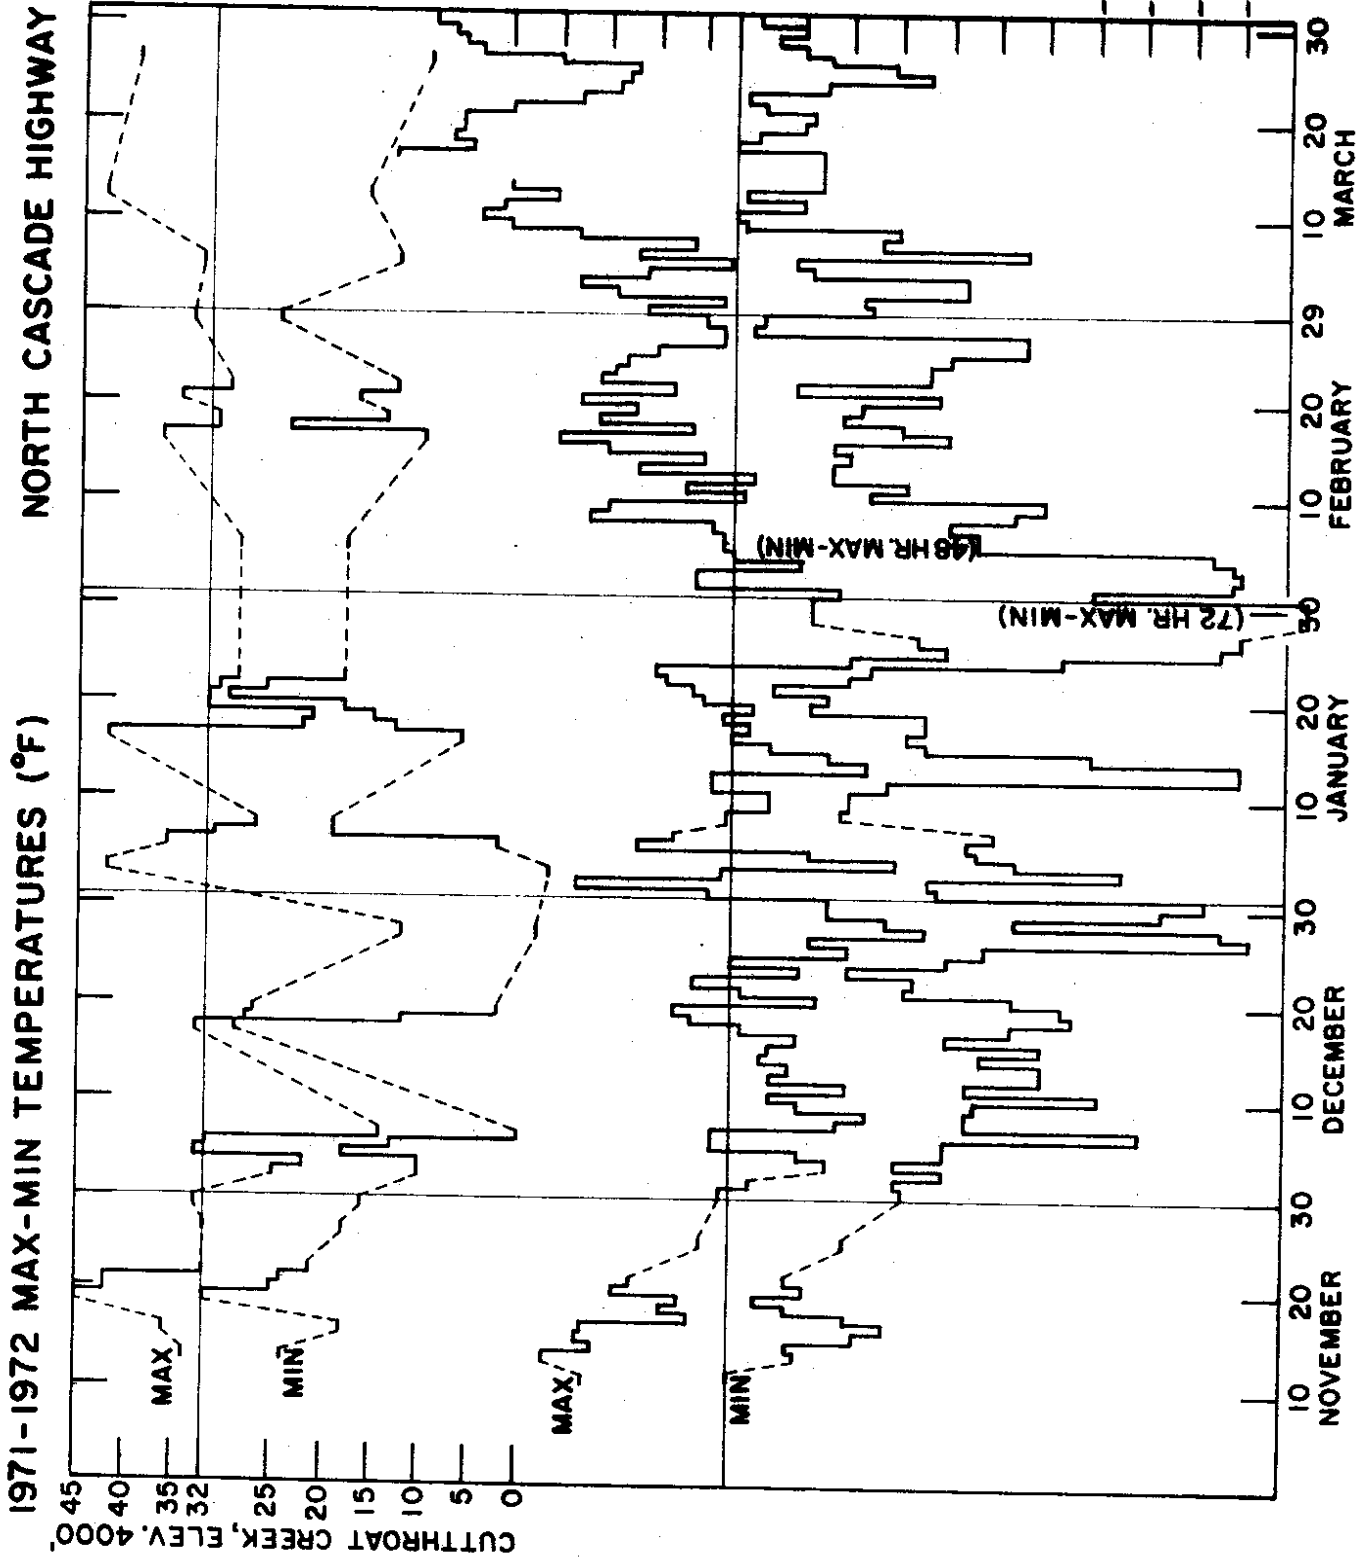


FIGURE 10.

1971-1972 MAX-MIN TEMPERATURES WASHINGTON PASS

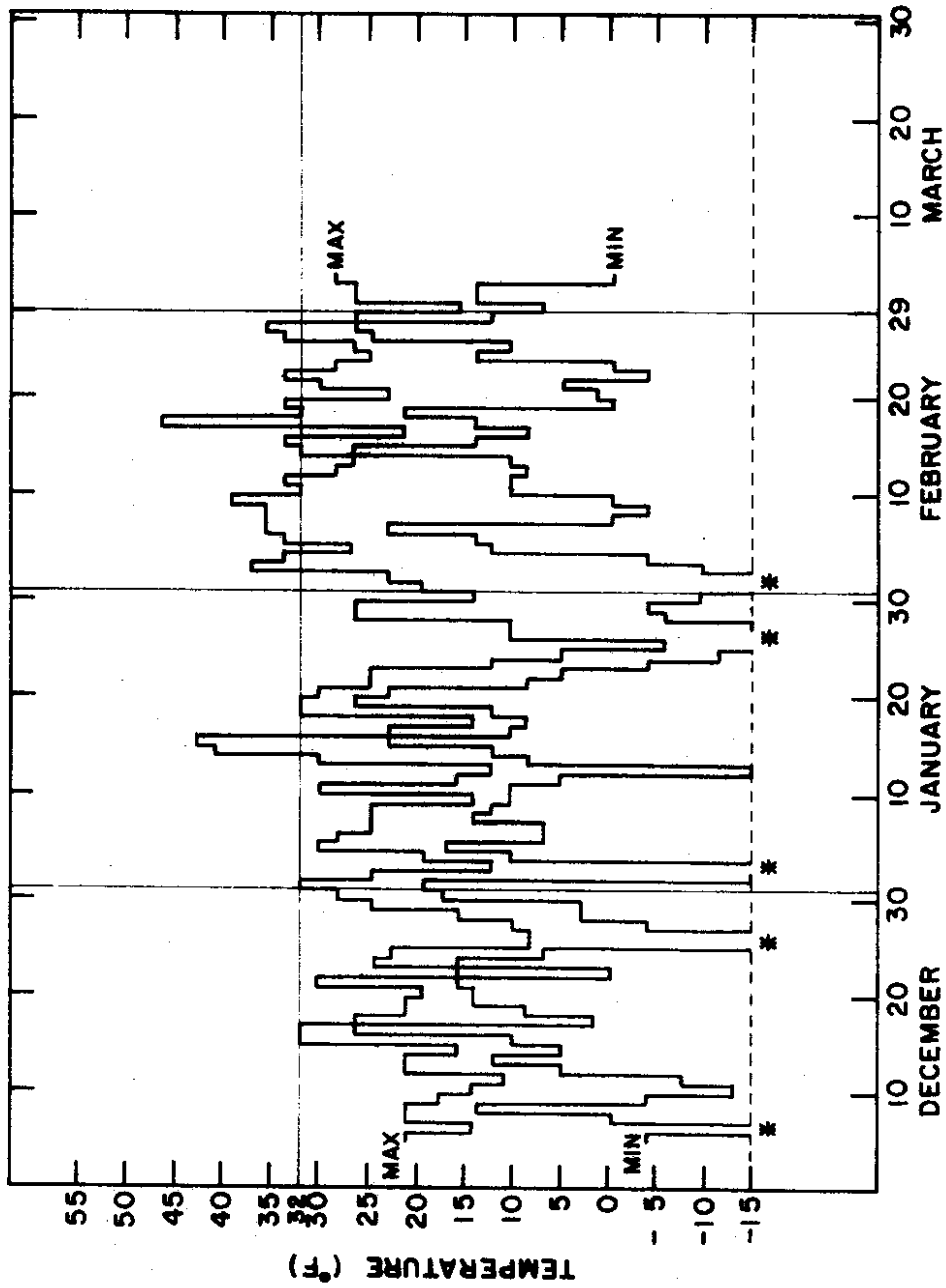

* TEMPERATURES BELOW -15° F WERE NOT RECORDED.

The Washington Pass record shows on the whole slightly lower maximum temperatures with a fewer number above freezing than the two lower stations. The minimum temperature at Washington Pass often dipped below the -15° F. limit of the thermograph chart.

Figures 11 and 12 show snow depth information for the 1971-72 winter. When studying these charts, it should be considered that measurements of snow depth often were taken on different days, and the interpolated values of snow depth (which are indicated by the lines on the chart connecting observations) may not accurately represent the daily values for use in comparing the different elevations.

Inasmuch as observations were made nearly every day at 2200 feet, the variations in that record, especially sharp rises, may help in interpreting the intermittent data at the higher levels. Of course, when it snowed at upper levels but rained below, as happened often in February and March, the 2200 foot record cannot be considered representative of the variations at some of the higher levels.

Figures 11 and 12 show that, very generally, snow depth at all levels increased fairly steadily from November until the middle of January, and fluctuated around these mid-January depths through most of February. Maximum depths at 4000 feet and below were reached as a result of the storms of late February and early March, after which rain was apparently responsible for a steady decrease in snow depth at these levels.

The snow depth record showed a systematic increase with increase in elevation as the snowpack began to grow in November. This type of variation with elevation continued to be displayed from the middle of December to the middle of February below 4500 feet. But from 4500 feet to 5500 feet the values were roughly comparable during that period. (In fact, the 4500 foot snow depths

FIGURE 11.

CUTTHROAT CREEK TO EARLY WINTERS
 NORTH CASCADE HIGHWAY
 TOTAL SNOW DEPTH


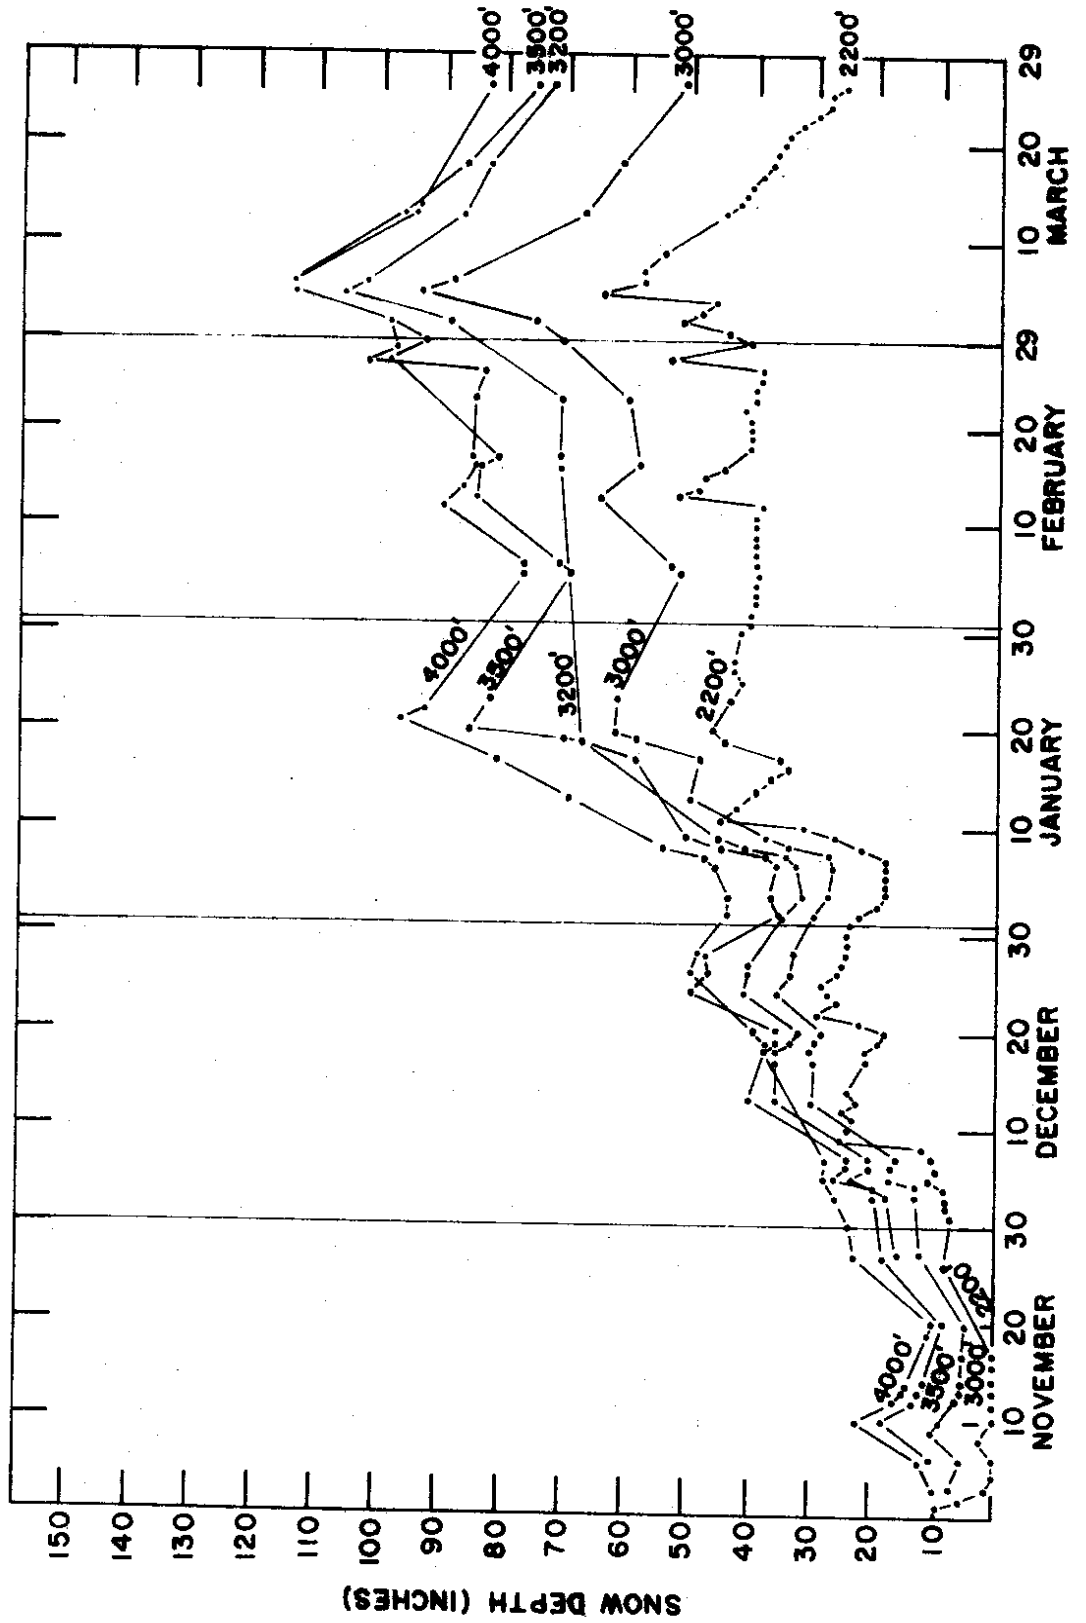


FIGURE 12.

WASHINGTON PASS TO CUTTHROAT CREEK
NORTH CASCADE HIGHWAY
TOTAL SNOW DEPTH

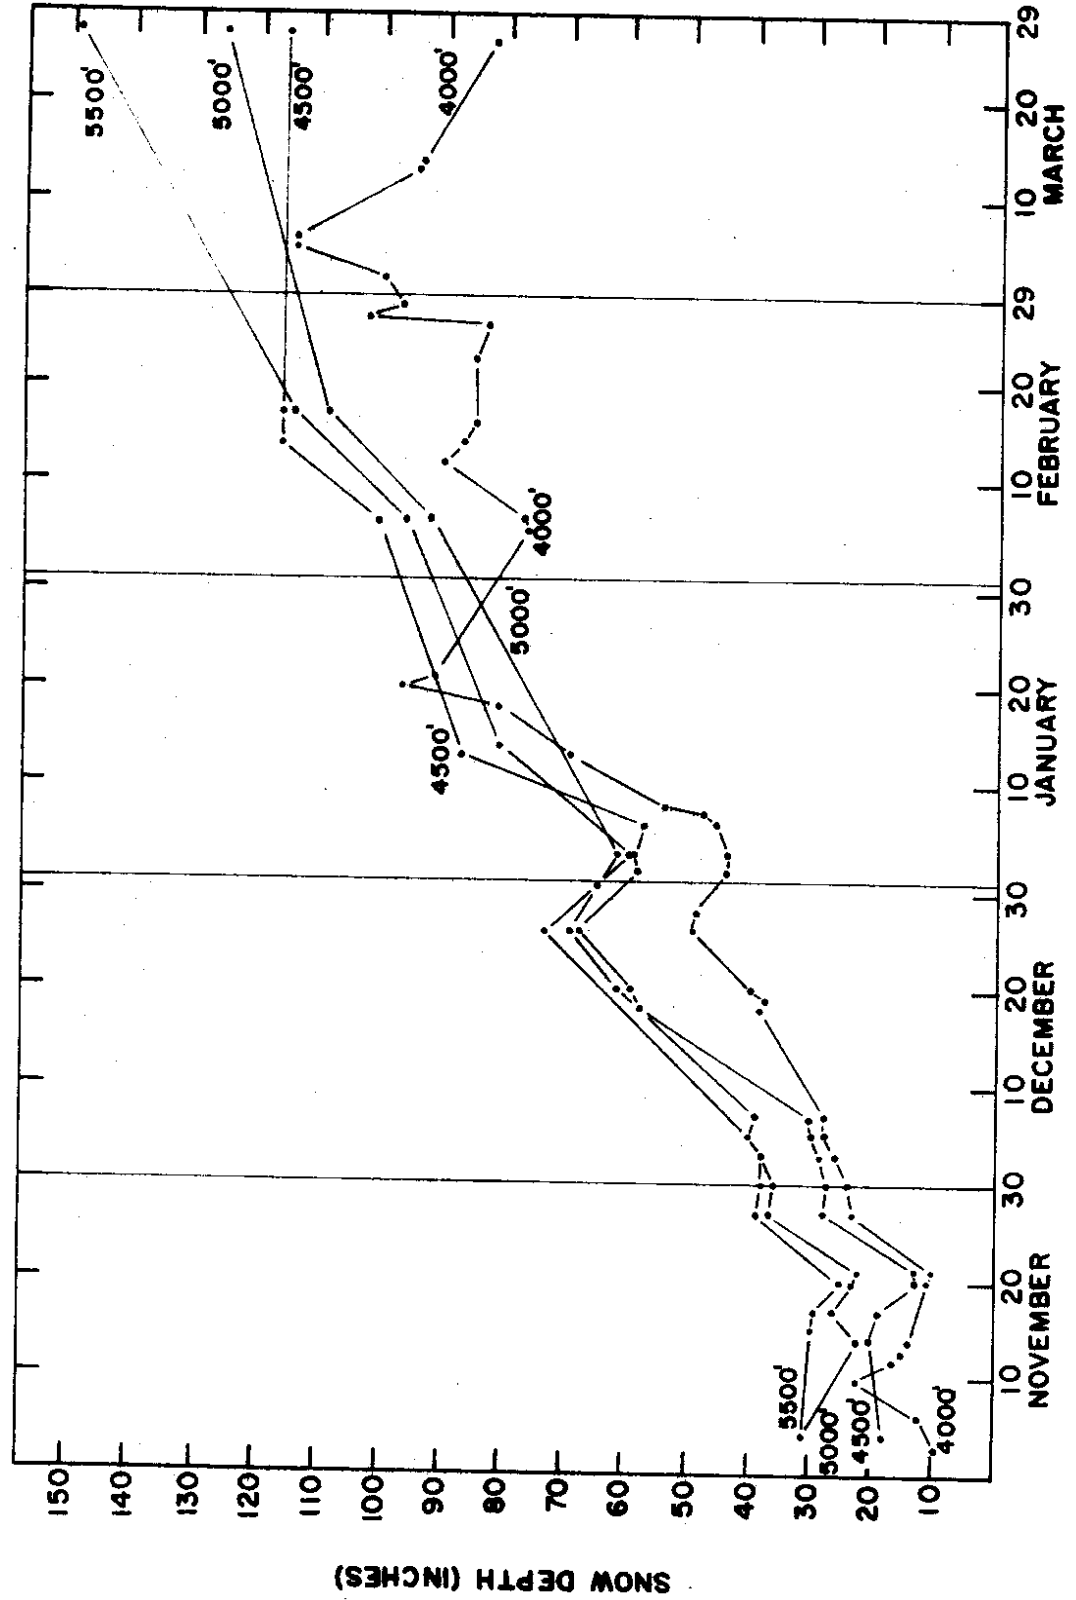

were usually a little greater.) By the end of March, however, the systematic increase with elevation had re-established itself at these levels.

Figure 13 shows the new (24 hour) snowfall record taken at Early Winters. This may roughly indicate what was happening at higher levels, except in February and March when rain predominated at this level.

Twenty four hour snowfalls greater than 12 inches occurred several times throughout the winter even at this low elevation. It may be noticed in comparing this chart with Figures 14, 15, and 16 that those intensive 24 hour snowfalls correspond in many cases to the major slide cycles.

Figure 14 shows the winter's slide activity along four different sections of the North Cascades Highway. It can be seen that along Delancy Ridge, Cutthroat Ridge, and Liberty Bell Mountain slide cycles are often concurrent. These cycles coincide generally with the major cycles throughout the Washington Cascades this past winter, especially the January 11, January 20, and March 5 cycles. The Diablo Gorge slides seemed generally unrelated in time to those on the east side.


Figures 15 and 16 show the record of activity for the individual slide paths along Delancy Ridge, Cutthroat Ridge, and Liberty Bell Mountain. The record shows the slides which were observed to have taken place and also indicates the slides which later investigation showed were probable but which could not be recorded because of hazard at the time to further travel along the road.

The slide activity along Delancy Ridge was considerable throughout the winter, although on only three days did any of these slides deposit snow on the road.

By comparison, the Cutthroat Ridge and Liberty Bell slides were more active, and a greater percentage of them ran into the road. In fact, the

FIGURE 13.


EARLY WINTERS DAILY SNOWFALL RECORD NORTH CASCADE HIGHWAY
(2200' ELEVATION)

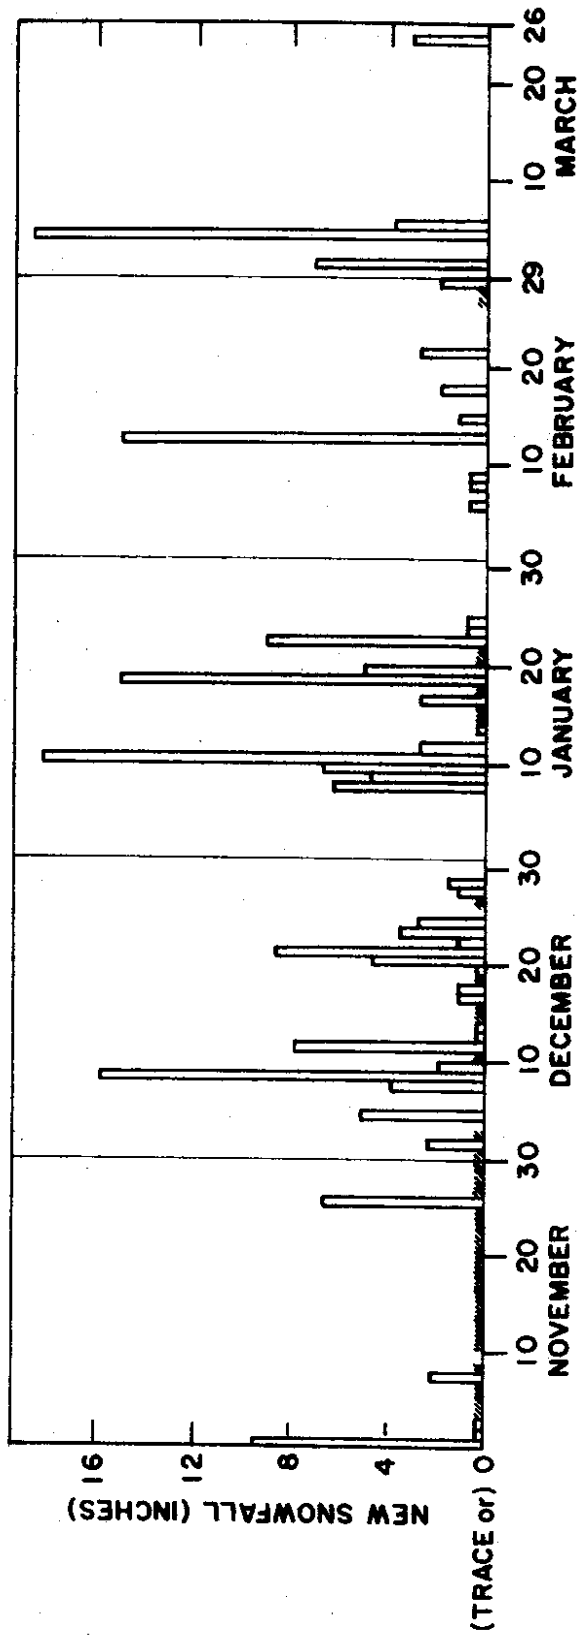

MISSING DATA

FIGURE 14.


OBSERVED AVALANCHES - WINTER OF 1971-1972 NORTH CASCADE HIGHWAY

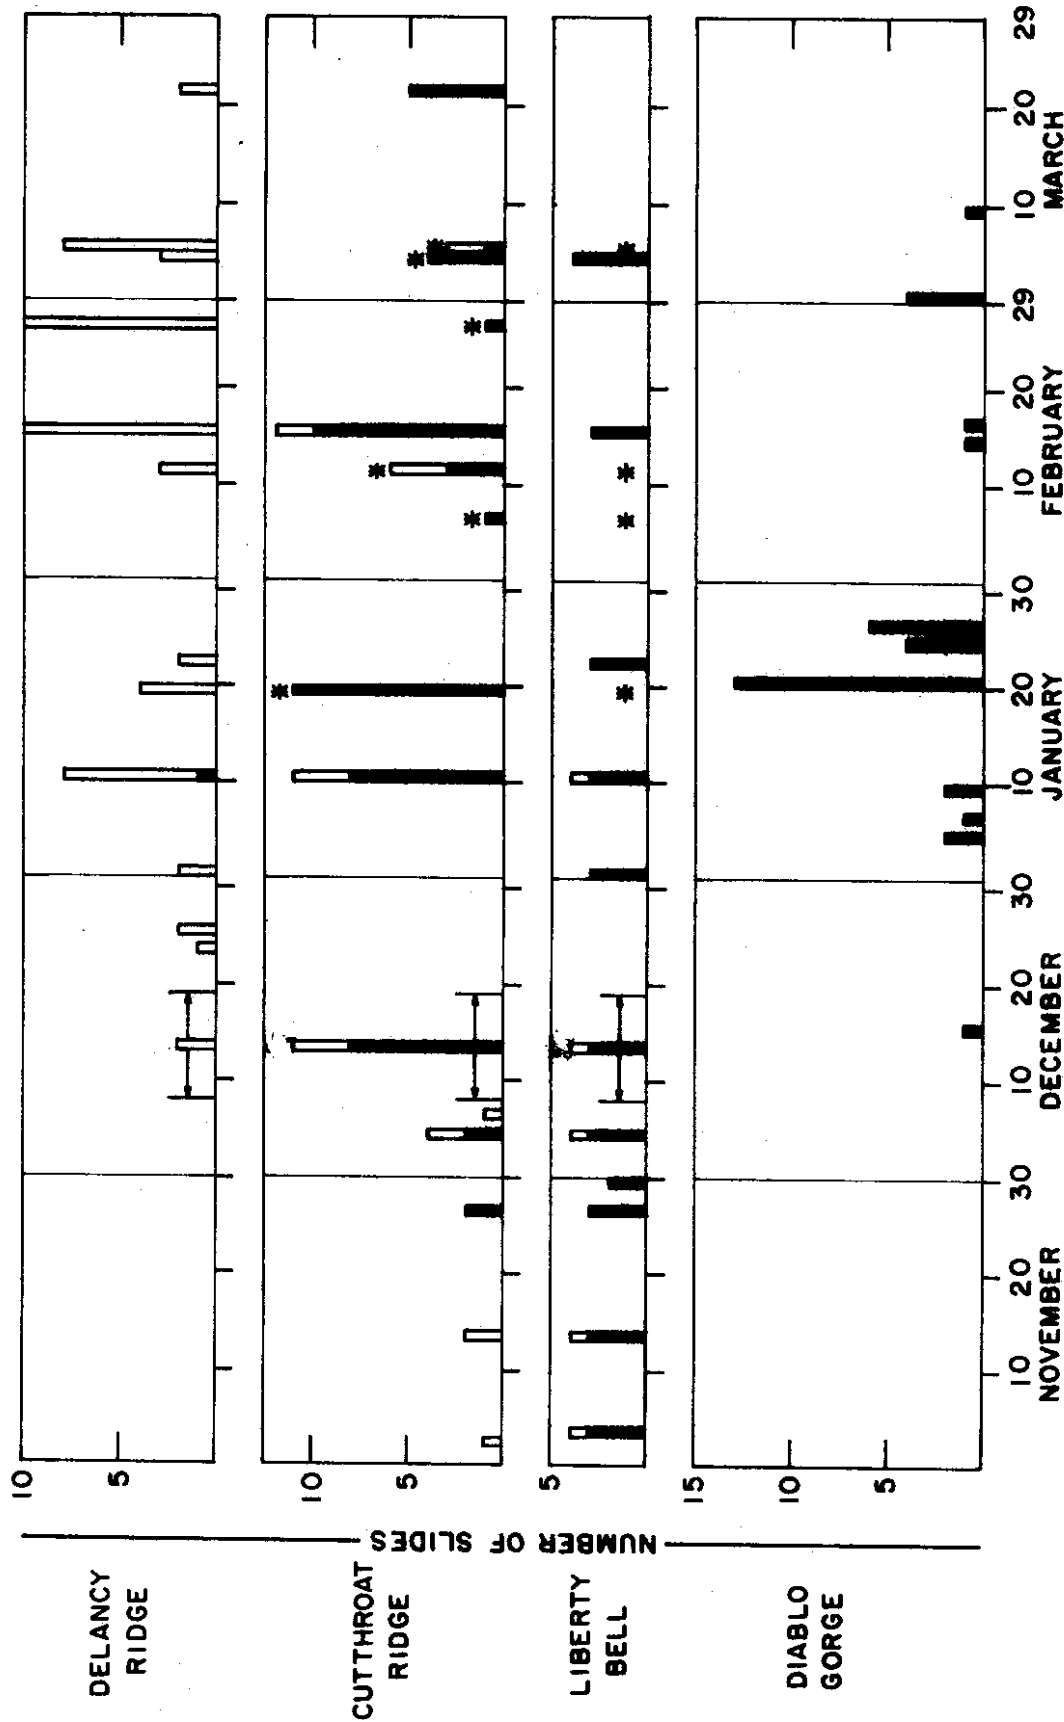

- Observed slides in or across the road
- Observed slides not reaching the road
- * Indicates other slides may have occurred which were not observed
- ☆ These slides occurred sometime between 8 Dec. and 19 Dec., possibly in two separate cycles

FIGURE 15.

NORTH CASCADE HIGHWAY DELANCY RIDGE SLIDE RELEASE LOG 1971-1972

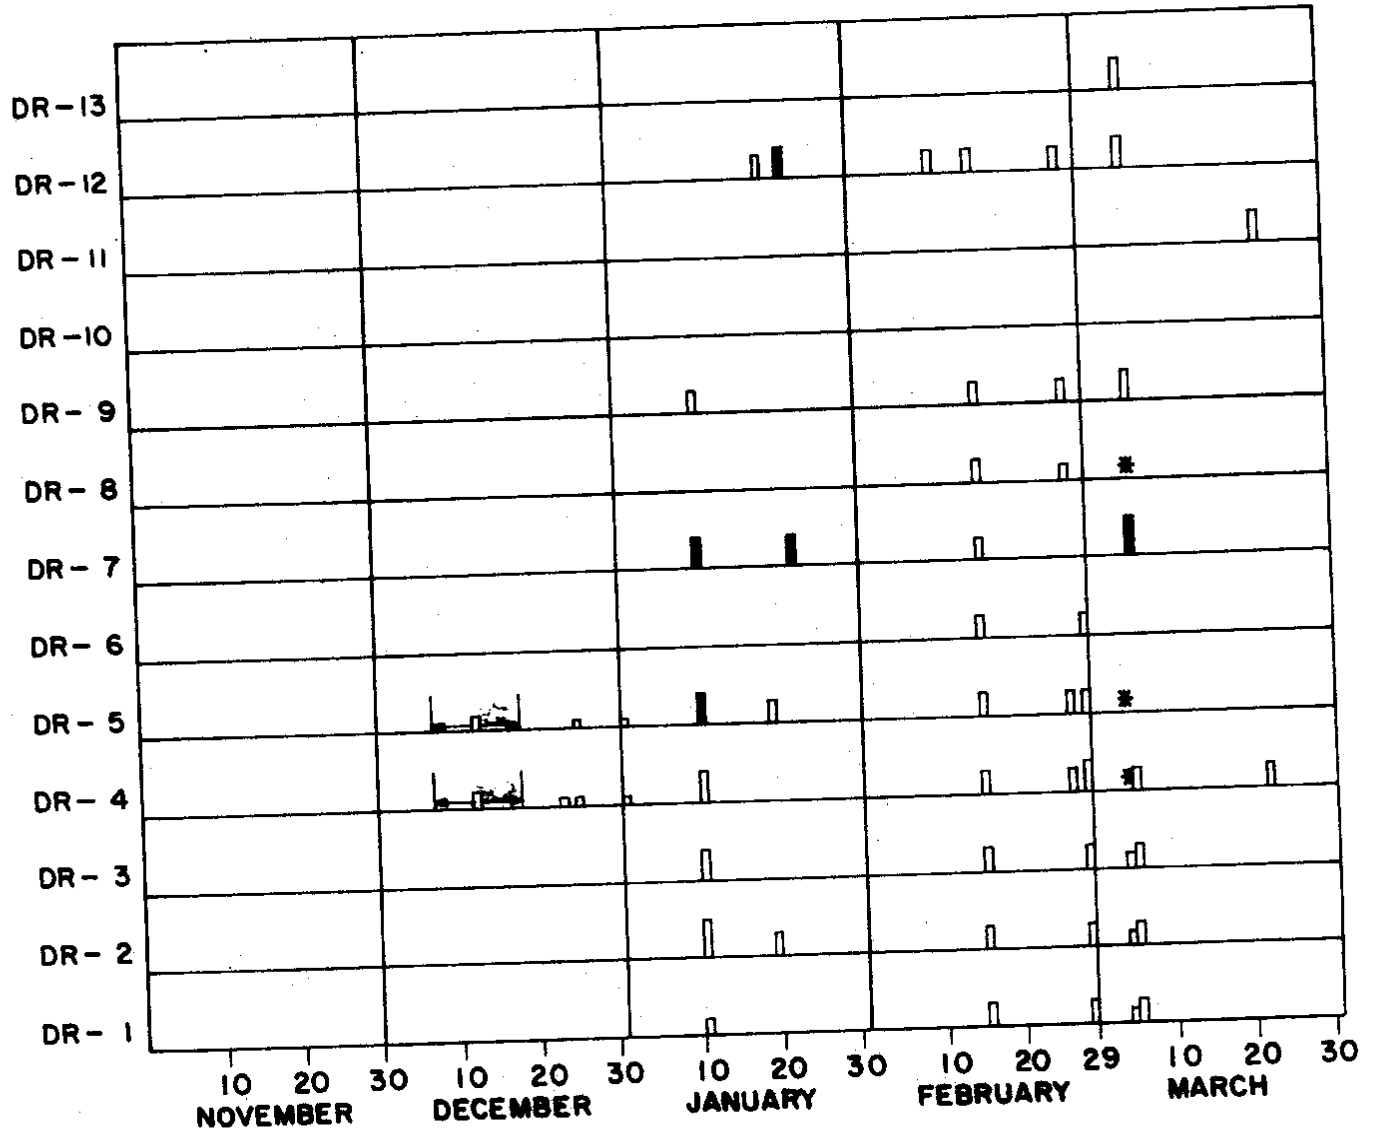


SIZE

- sluff
- small
- medium
- large
- maximum
- Observed slide, not reaching road
- Observed slide, in or across road
- * Slide not observed, but thought probable

Slides released sometime between 8 December and 19 December were possibly in two separate cycles.

FIGURE 16.

NORTH CASCADE HIGHWAY LIBERTY BELL & CUTTHROAT RIDGE SLIDE RELEASE LOG 1971 - 1972

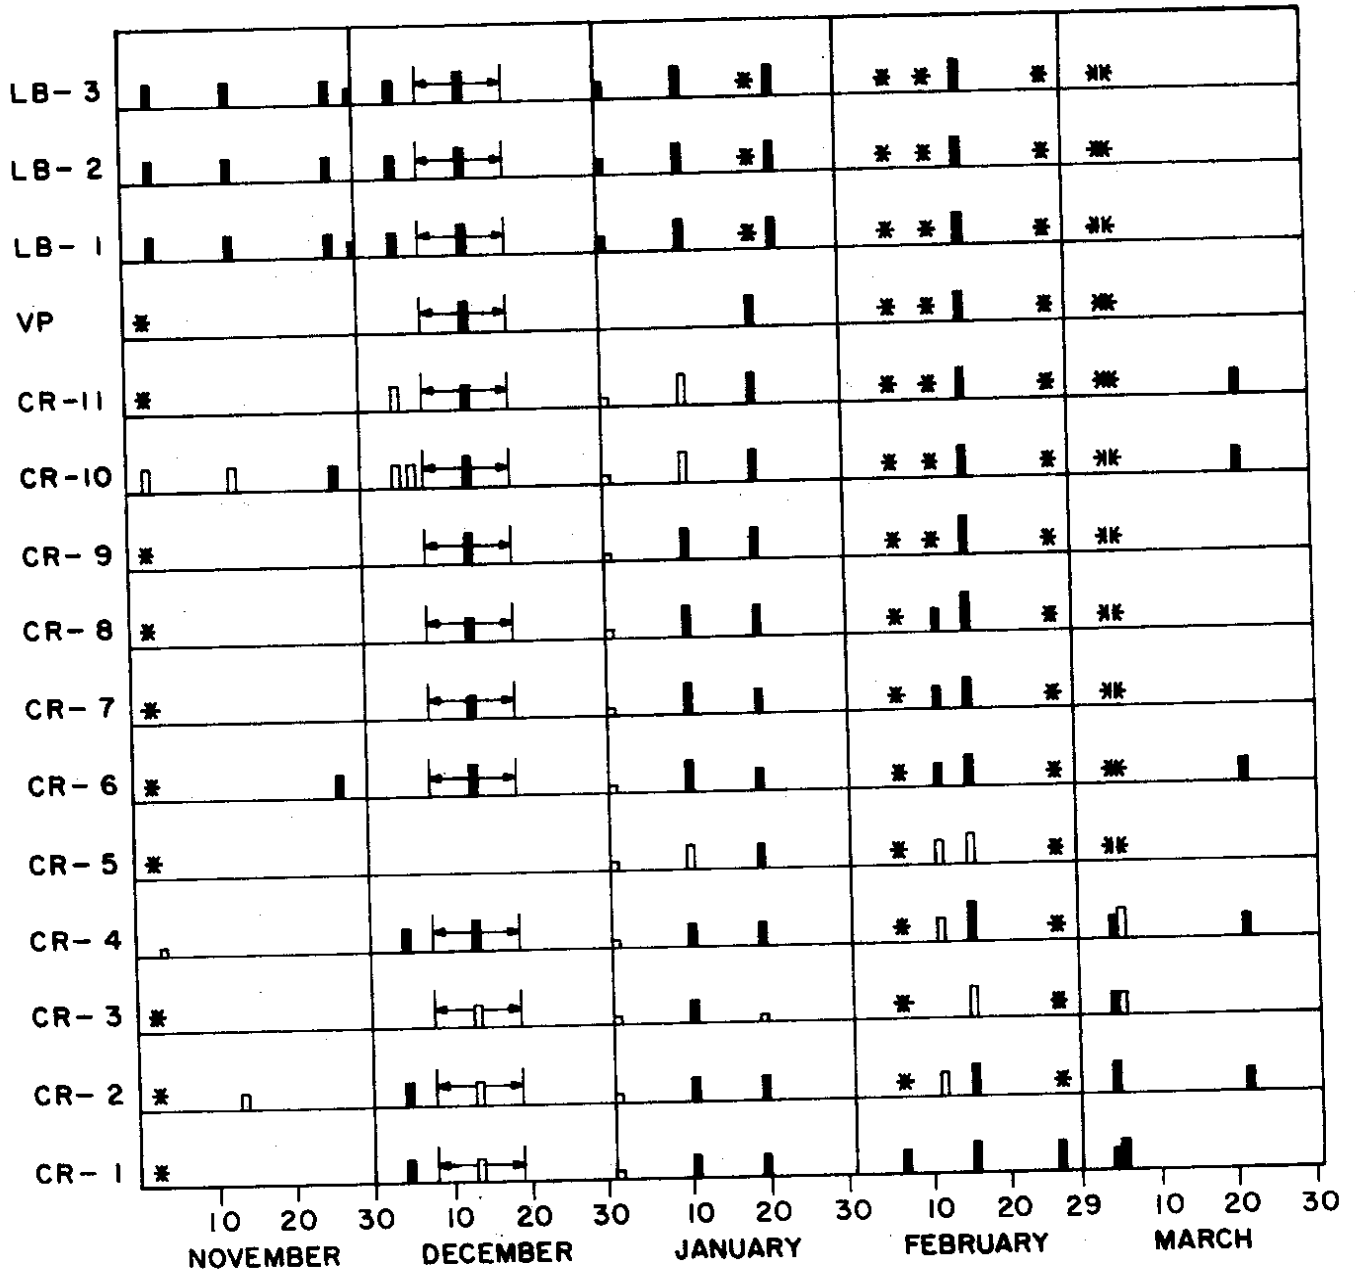

SIZE

- sluff
- small
- medium
- large
- maximum

- Observed slide, not reaching road
- Observed slide, in or across road
- * Slide not observed, but thought probable

Slides released sometime between 8 December and 19 December were possibly in two separate cycles.

Liberty Bell slides came into the road each time they were observed to have been released, usually all three in the same storm

Table II and Figure 17 summarize the activity of each active slide path between Early Winters and Washington Pass for the winter 1971-72. Most of the Cutthroat Ridge slides and the first three Liberty Bell slides were quite active and often in the road. (Liberty Bell #3 was in the road at least 12 times, with more unrecorded slides likely to have occurred. Often this slide continued down the slope to cross the lower portion of the switchback of the highway as well.)

The winter of 1971-72 was of exceptional severity throughout the Cascades. The above illustrations thus serve as good examples of the kind of activity to be dealt with along the North Cascades Highway.

TABLE II.

NORTH CASCADES HIGHWAY - EARLY WINTERS TO WASHINGTON PASS SLIDE PATH ACTIVITY


Winter of 1971-72

Slide Path	Number recorded	Number in road	Percent of recorded slides in road
Silver Star #1	0	0	0
" " 2	4	0	0
" " 3	4	0	0
" " 4	1	0	0
" " 5	1	0	0
Delancy Ridge #1	5	0	0
" " 2	6	0	0
" " 3	5	0	0
" " 4	11	0	0
" " 5	9	1	11
" " 6	2	0	0
" " 7	5	3	60
" " 8	2	0	0
" " 9	3	0	0
" " 10	0	0	0
" " 11	1	0	0
" " 12	6	1	17
" " 13	1	0	0
Cutthroat Ridge			
" " #1	8	7	88
" " 2	9	6	67
" " 3	5	2	40
" " 4	10	7	70
" " 5	4	1	25
" " 6	8	8	100
" " 7	6	6	100
" " 8	6	6	100
" " 9	5	5	100
" " 10	11	6	55
" " 11	7	5	71
View Point	4	4	100
Spire Gulch	6	1	17
Liberty Bell #1	11	11	100
" " 2	10	10	100
" " 3	12	12	100

FIGURE 17.

EARLY WINTERS TO WASHINGTON PASS
SLIDE PATH ACTIVITY, WINTER OF 1971-1972

NORTH CASCADE HIGHWAY

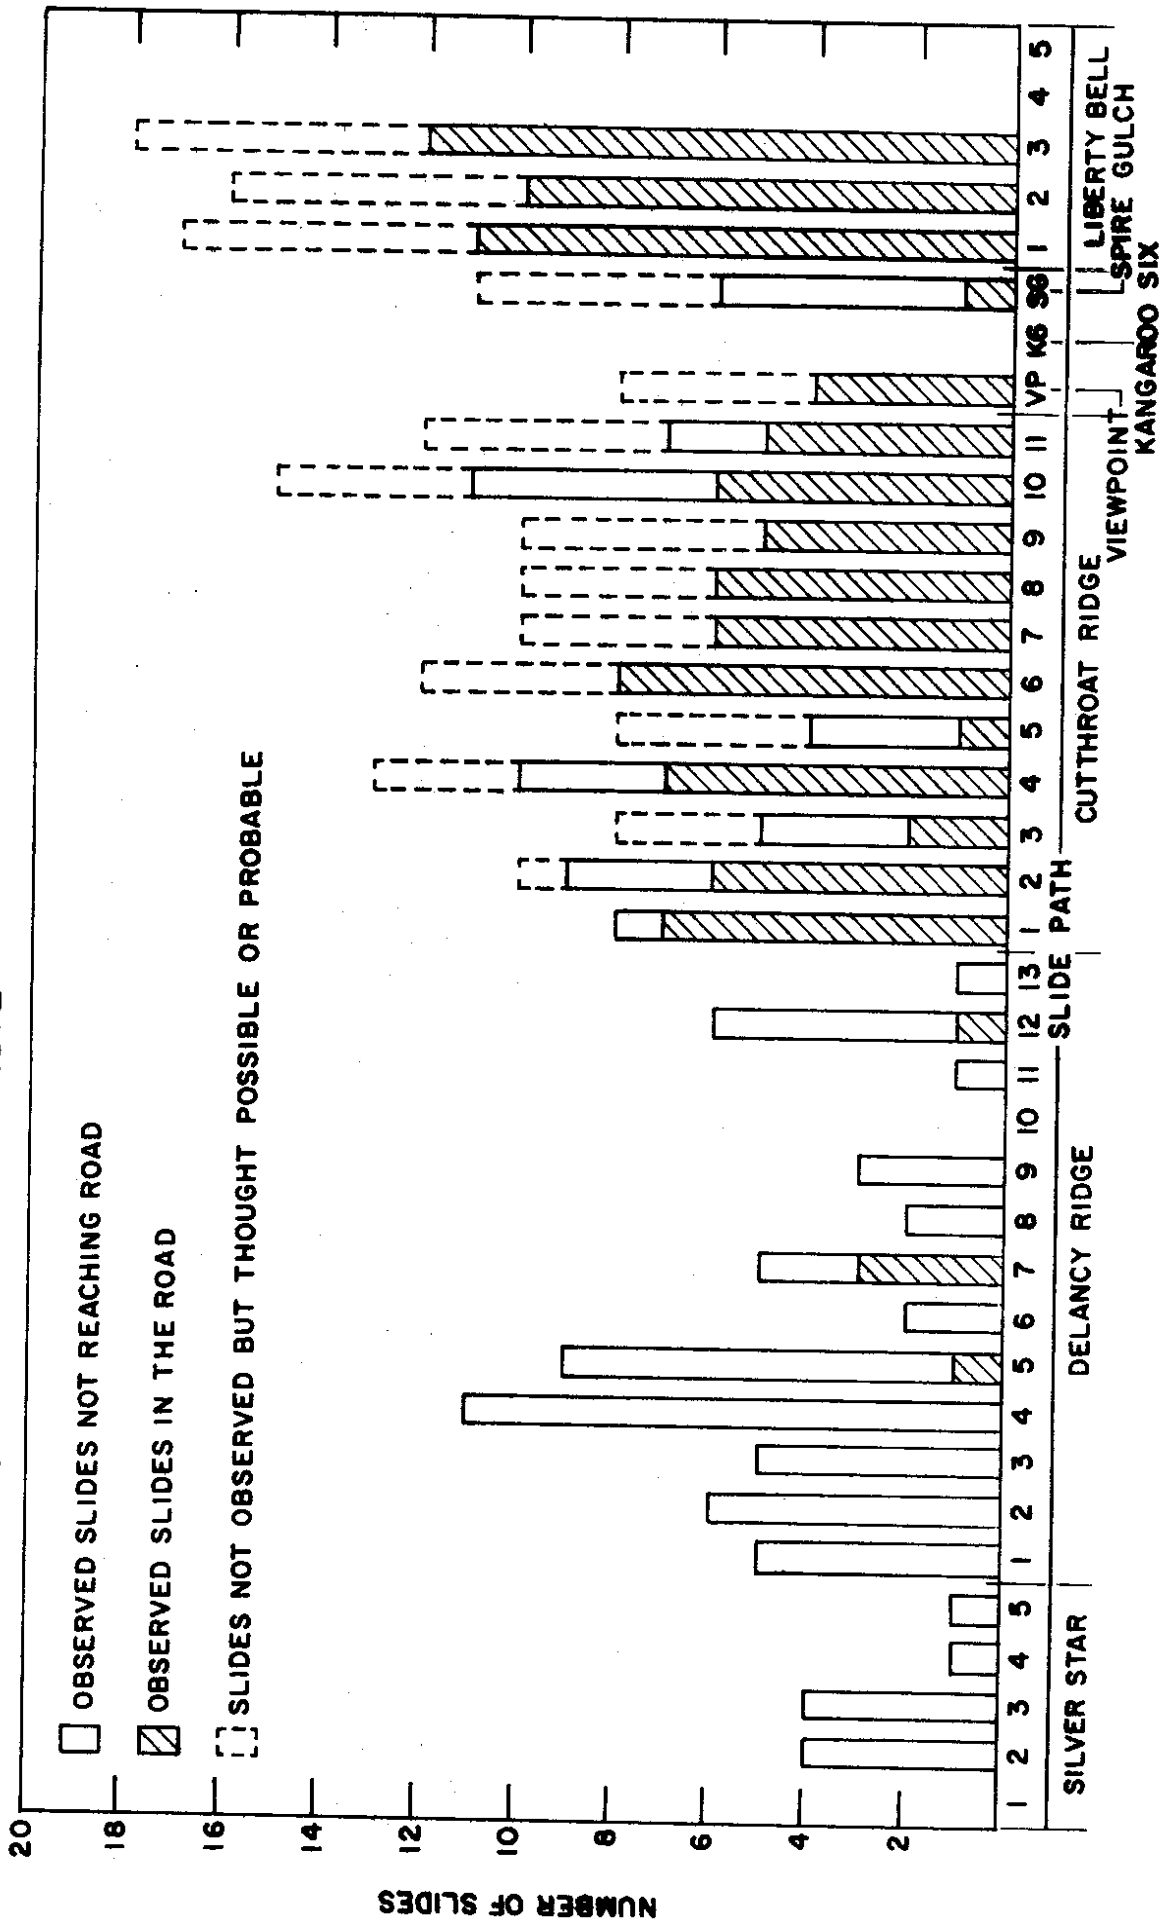

REFERENCES

1. LaChapelle, E. R. (1971), Avalanches on the North Cascades Highway (Sk-20) Avalanche Atlas and Summary Report. Prepared for the Washington State Highway Commission.
2. Brown, C. B., R. J. Evans and E. R. LaChapelle (1972), Slab Avalanching and the State of Stress in Fallen Snow, Journal of Geophysical Research. Vol. 77, No. 24.
3. Perla, R. I. and E. R. LaChapelle (1970), A Theory of Snow Slab Failure, Journal of Geophysical Research, Vol. 75, No. 36, 7619-7627.
4. Brown, C. B. and L. E. Goodman (1963), Gravitational Stresses in Accreted Bodies, Proceedings, Royal Society, A, Vol. 276, 571-576.
5. Haefeli, R. (1963), Stress Transformations, Tensile Strengths and Rupture Processes of the Snow Cover, Ice and Snow, Ed: W. D. Kingery, M. I. T. Press.
6. Sommerfeld, R. A. (1969), The Role of Stress Concentration in Slab Avalanche Release, Journal of Glaciology, Vol. 8, No. 54, 451-462.
7. Butkovich, T. R. (1956), Strength Studies of High Density Snows, SIPRE Research Report No. 18, Wilmette.
8. Timoshenko, S. P. and J. M. Gere (1961), Theory of Elastic Stability, McGraw-Hill, 104.
9. Goodier, J. N. (1942), An Extension of Saint Venant's Principle, with Applications, Journal of Applied Physics, Vol. 13, No. 3, 167-171.
10. Arutyunyan, N. K. (1968), Some Problems in the Theory of Creep, Pergamon Press, 15.

APPENDIX: BIBLIOGRAPHY OF SNOW-CLEARING TECHNOLOGY

1. "Snow Clearance Problems on Swiss Roads." Inst. Civil Engineers, 10(7) 359-380 (58)- D379 Proc 625.768.5(494)
2. "Use of Neat Rock Salt for Snow Clearing and Winter Gritting in West Riding." LOVELL C S M: E150. Surveyor and Munic. and County Engr. 117(3459) 799-802('58). 625.768.5:551.578.4 (427.4)
3. "New Toll Plaza Snow Melting System Keeps Skyway Traffic Moving," NEAL G W: CIIIO Heating Piping and Air Condition. 30(9) 140-143('58) 625.711.3 625.768.5 (773 C)
4. "Die Schweizerischen Normen fur Schneeraumung. CROCE K: E139, Strasse u Autobahn, 9(6) 210-212 ('58) 625.768.5 (083.7)(494)
5. "Getting Ready for Winter Weather," WEST D B: D409, Public Works 89(8) 96-99 ('58) 625.768.5 624.143.3 (797)
6. "Elektrische Beheizung von Fahrbahndecken und Brucken." WAHL F: E 139 Strasse u Autobahn 9 (11) 413-418 ('58) 625.768.5:625.85 697.71 624.21.012.4 .095
7. "Snow Removal Needs New Ideas." HOLSTER W: A365 American City 73(10) 124-125 ('58) 625.768.5 (749C)
8. "Both Garbage and Snow." REA C: A365 American City 73 (9) 177('58) 625.768.5: 628.443.4 (786 K)
9. "Turnpikes are Expected to be Snow Free." NEWCOMER I W:D409 Public Works 89(8) 100-102('58) 625.768.5 (781)
10. "Open Area Heating." HILLIER A B: B441 Elec Rev 163(24) 1105-1108 ('58) 625.768.5 (425.5C): 621.365.4
11. "Winter Maintenance on Maryland Highways." SCRIVENER F P: D409 Public Works 89 (8) 93-95. 183-184 ('58) 625.768.6 (74)
12. "Electric Heating for Roadways." LIVINGSTONE F C :C109 Heating and Vent. Engr. and J. Air Condit. 32 (376) 184-186 ('58) 625.768.5 624.134.34-65
13. "Beheizungssysteme fur Brucken Strassen und Flugpisten Gegen Glatteis und Schnee." WAHL E F: E140 Strassen u Tiefbau 12 (12) 661-664, 666, 668, 670, 672 ('58) 625.768.5 624.143.3: 697:71 (43-15)

14. "Melt the Snow Off Your Driveway- Electrically." MAHER J R: C89 Gen Elec Rev. 61(6) 39-43 ('58)
625.768. 5:621.365
15. "New Haven Scores a Hit With Snow Removal Program." BEERS D M: A365 Amer. City 73(11) 128-130 ('58)
625.768.5 (746 N)
16. "Mechanization and Multiduties." FOSTER W S : A365 Am. City 73(12) 96-98
625.768.1 .6 .08(485 S)
17. "You Just Can't Trust the Weather Forecaster in Newport." BECK I H: A365 Am City 73(12) 86-87 ('58)
625.768.5.08 (74 N)
18. "Snowmelt Runoff." ZOLLER J H, LENZ A T: D419 Proc Am Soc Civil Engrs. 84(HY-6) 1834-1/1834-31 ('58)
627.152.15: 551.579.2
19. "La Mecanisation du Service Hivernal d'une Ville Situee a 1000 Metres d'Altitude." PRAEHLER E: H222 Strasse u Verkehr 45(5) 191-194 ('58)
20. "Materiel Presente et Enseignement des Epreuves." CEX R: H148 Rev Gen Routes et Aerodromes 29(327) 42-46 ('59)
625.76.08 "324"
21. "Keeping Canada's Airports Snow Free." A347 Airports and Airport Eng. 13 (135) 19-20 ('59)
625.768.5 (71) 625.712.65
22. "Schneeraumung und Schneeraummaschinen." CROCE K: E140 Strassen u Tiefbau 13(6) 412-426, 428, 430 ('59)
625.768.5 624.144.4
23. "Winterliche Strassenglatte und Ihre Bekampfung." WEHNER B: E140 Strasson u Tiefbau 13(6) 402, 404, 406-411 ('59)
625.768.5 624.144.4
24. "Organisation und Vorbereitung des Winterdienstes auf Stadtstrassen, Einschliesslich Rechtsfragen." BAUCH: E140 Strassen u Tiefbau 13(6) 436-445 ('59)
625.768.5/ .6
25. "Iowa Begins Research in Maintenance.Ohio Pike Begins Winter Battle in Summer." CRONK D L: E9 Roads and Streets 102(9) 88-91, 93, 100-103, 122 ('59).
625.768.5 (771)
26. "High Production Rotary for Clearing High Altitude Passes." E9 Roads and Streets 102(5) 194-195 ('59)
625.768.5.08
27. "Schneeschutzanlagen im Rahmen des Modernen Winterdienstes." SCHATBLE L: E140 Strassen u Tiefbau 13(8) 591-599 ('59)
625.768.6/7

28. "Lo Sgombero della Neve Nei Centri Urbani." BERTOLOTTIC: B38 A T A Assoc
Tech. Auto 12 (8/9) 333-337 ('59)
625.768.5 629.114.751
29. "Sloping Driveway's Snow Melting System Assures Snowfree Slipfree Pavement."
RUDBERG J: CIIO Heating Piping and Air Condit. 31(10) 112-113 ('59)
625.768.5- 698.7 697.49: 547.422.2 (776)
30. "Der Winterdienst auf Stadtstrassen!(Teil I.) DAKE J: Strassentechnik 7(10)
(B56 Bauplan- Bautech 13[10])118-119 ('59)
625.768.5/.6
31. "Der Wintereinst auf Stadtrassen."(Teil II) DAKE J: Strassentechnik 7 (11)
(B56 Bauplan-Bautech 13[11])
625.768.5/ .6
32. "Winterdienst im Gebirge." FRITZER: E140 Strassen u Tiefbau 13(12)
891-897 ('59)
625.768.5/ .6.625.711.8 (436)
33. "Engineering Law Applied to Highway Drainage." ROWE R R: D415 Proc Am.
Soc. Civil Engrs. 85 (HW4 Pt.1) 23-25 (59)
625.768.2 (094.7)
34. "Der Winterdienst auf Stadtstrassen."(Teil III) DAKE J: Strassentechnik 7
(12) B56 Baupla-Bautech 13 (12) 137-140 ('59)
625.768.5/ .6
35. "Snow and Ice Control in the District of Columbia." XANTEN W A: D409
Public Works 90 (9) 120-122 ('59)
625.768.5
36. "Zur Elektrischen Beheizung von Strassenbruoken." MIRAM P: B461 Elektri
625.768.5: 624.21 621.365.41
37. "Large Road Heating Installation." B441 Elec Rev. 165 (20) 924 ('59)
625.768.5 621.365.41
38. "Les Enseignements Techniques du XIII Concours Internationale d'Appareils
Chasse-Neige." GEX R: H148 Re V Gen Routes et Aerodromes 39 (339)
49-62 ('60)
624.144.55 625.768.5
39. "Der Strassenwinterdienst auf den Deutschen Bundesfernst-Rassen."
AHLBRECHT H: H222 Strasse u Verkehr 46(1) 7-14 ('60)
625.768. 4/.5
40. "A New Road Heating Installation." B60 BEAMA J: 67(1) 39 Edinburgh
625.768.5 621.365.4
41. "Electrical Heating of Road." WHIFFIN A C, PRICE W I J: E8 Roads and
Road Construct. 38 (449) 144, 145 ('60)
625.768.5

42. "Snow Melting by Electrical Means." KOBOLD A E, WEST G H: B289 Ontario Hydro Research News 12(1) 18-24, 37('60)
625.768.5 621.365.4 69.024.3
43. "Le XIII Concours Internationale de Chasse-neige." ALLANET P T: C61 Genie Civil 137(7) 146-151 ('60)
625.768.5 629.114.791: 061.3 (100)(44c) "1960"
44. "Chemical Mixture Test Program in Snow and Ice Control." Lang C.H, DICKINSON W E: B358 Highway Research Board 1960 (252) 1-8 ('60)
624.143.36 625.768.5
45. "Use of Chemicals and Abrasives in Snow and Ice Removal from Highways," BROHM D R, EDWARDS H M: B358 Highway Research Board 1960 (252) 9-30 ('60)
624.143.36 625.768.5
46. "Dimensioneering av Snowsmaltningsanlaggningar." BORGHULT P: H302 V V S Tidskr 31 (8) 247-256 ('60)
625.768.5 (485)
47. "Preparations for Winter Must Start Early." THOMSON P: D409 Public Works 91 (9) 98-100 ('60)
624.144.55 (797)
48. "Snowfall is the Biggest Challenge of Airport Maintenance." WOLFE D C: D409 Public Works 91 (9) 94-95 ('60)
625.712.65 624.144.55
49. "Tollway Aim: Safe Driving at any Hour." KRESS R W: D409 Public Works 91(9) 96-98 ('60)
625.768.5 624.144.55 (773 C)
50. "Minneapolis Sends Snow Down the River." LUND E H: D409 Public Works 91 (9) 92-93 ('60)
625.768.5 624.144.55 (774 M)
51. "How to Use Heat Transfer Petroleum Fluids for Snow Melting Systems." PURDY R B: C110 Heating Piping and Air Condit. 32(12) 123-125 ('60)
625.768.5:662.75
52. "Snow Melting Problems and How They Were Solved." TURNELL F J: D509 A S H R A E Journal 3(1) 71-72 ('61)
625.768.5 (784 N)
53. "Winter Gritting in Northamptonshire." E8 Roads Road Construct. 39(459) 72-74 ('61)
625.768.5 (425.5)
54. "Winter Gritting." CHADWICK C R: C309 J Inst. Munic Engrs 88 (2) 64-72 ('61)
625.768.5/ .6 "324"
55. "Heated Roads." PRICE W I J: C307 Inst. Heating and Vent. Eng. 28 (12) 319-320 ('60)
625.768.5-65

56. "Residential Snow Melting Systems." HARRIS W S: A342 Air Condit. Heating and Vent. 58(1) 51-54 ('61)
625.768.5:728.37
57. "Winter Maintenance Requires Year-around Planning." BARTELSMEYER R R: D409 Public Works 91(10) 93-95 ('60)
624.144.55 (773) 625.768.5
58. "Vermeidung von Unfallen durch Beheizte Fahrbahndecken System Bomak I." B345 Brucke u Strasse 13(5) 198-200 ('61)
625.768.5
59. "Mild Winters Still Require Planning." CALKINS M D: D409 Public Works 92(8) 94-95 ('61)
625.76 624.143/. 144 (77)
60. "Die Schneedruck-und Lawinenschutzbauten der 220-kV-Leit ung Kaprun-St. Peter."SCHAUER H: D233 Osterr Z Electrizaritswirtsch 14(4) 123-130 ('61)
624.144 621.315.1. 051. 027. 82(436) 624.97.014.4
61. "Technical Panel Discusses Winter Maintenance": D409 Public Works 92(8) 96-97 ('61)
625.76 624.143
62. "How Cincinnati Controls Snow and Ice." Gailey C V: D409 Public Works 92(8) 89-91 ('61)
624.144.5 625.768.5 (771C)
63. "Maryland's Snow Control Program." HALLSTEAD W F: D409 Public Works 92(9) 137-139 ('61)
625.768.5 (752)
64. Vehinderung von Schneeverwehungen auf Alpenpasstrassen RECLI C: E139 Strass u Autobahn 12(9) 312-314 ('61)
624.144.4 625.711.8 (234.3)
65. "Elaborate Road Defenses Thwart Avalanches!"B482 Eng News-Record 167(23) 40-41 ('61)
625.711.8 624.144 (71)
66. "Snow Removal" C124 Com Car J 102 (6) 95-99 ('62)
67. Autobahnen und Winterdienst KNOBEL A: H222 Strasseu Verkehr 47(10) 509-513 ('61)
625.768.5 625.711.3 (494)
68. Eisfreie Autobahn durch Kunststoffe. E171 Kunststoff-Berater 6(11) 710 ('61)
625.764:624.143.36 678.664.06-496
69. "Anything New in Snow Control." HALLSTED W F: D409 Public Works 92(11) 101-103 ('61)
625.768.5
70. "Snow and Ice Control- a Full-time Engineering Job." D409 Public Works 92(12) 102-103 ('61)
625.768.5 (744)

71. "Can We Estimate Costs of Winter Maintenance?" HYLAND G G: D409 Public Works 92(11) 106-108 ('61)
625.768.5.003 (744)
72. "Concrete Avalanche Sheds." B307 Concrete and Construct. Eng 56(9)
325-326 ('61)
625.711.3 624.144 (71)
73. Vermeidung von Unfallen durch Beheizte Fahrbahndecken (System Bomak).
LAMBERT H: E140 Strassen u Tiefbau 15(12) 1050-1051 ('61)
625.768.5 624.143.34
74. Massnahmen gegen Schneeverwehungen SCHNEIDER T R: H222 Strasse u Verkehr
47 (11) 569-575 (61)
625.76 624.144.4
75. "Der Rogers Pass in der Trans-Kanada-Strasse." SCHARER P: H222 Strasse
u Verkehr 48 (2) 79-85 ('62)
625.711.8 (71)
76. "Highway Construction and Maintenance Problems in Permafrost Regions."
NICHOLS D R, YEHLE L A: D493 Bull Eng Experiment Station Univ. Tennessee
1961 (24) 19-29.
625.73 625.76 624.139.6 (789)
77. "Road Surface Heating for Hammersmith Flyover." C166 Heating 24 (194)
62 ('62)
625.768.5 (421 H) 624.21 625.712.36
78. "Snow and Ice Removal" GF62-160 Frontier 1962 (Winter) 14 (62)
624.144 656.088
79. "Oilheating Sidewalks to Handle Snow." ADAMS W B: C24 Fuel Oil and Oil
Heat 21 (3) 68-69 ('62)
625.768.5 697.4
80. "Snow Melting System Keeps Bank's Sidewalks Clear." STEVENS L A,
WINANS G D: C110 Heating Piping and Air Condit. 34(4) 114-118 ('62)
625.768.5: 625.611.6 (774 D)
81. "Don't Let Snow Bury Your Production Line." MEYER E T E3 16 Mil and
Factory 71(3) 64-67 ('62)
624.144 658.58 629.114.791
82. "Electrical Heating for Hammersmith Flyover." C109 Heating and Vent. Engr.
and Air Condit 35 (414) 390 ('62)
697.353-65 625.768.5 (42 H)
83. "Resistance of Concrete Surfaces to Scaling by De-icing Agents."
Grieb W E, WERNER G, WOOLF D O: D408 Public Roads 32(3) 64-73 ('62)
625.84.089.1 624.143.3
84. "Techniques for Automatic Heating of Road Surfaces." B50 Australian Elec
World 27 (9) 53 ('62)
625.768.5 624.143.34 621.365.4

85. Winterliche Erinnerungen an den Strassenunterhalt SACCHETTI O: H222
Strasse u Verkehr 48(11) 567-568 ('62)
625.76 624.142/.148
86. Gutemassee für Scheeremaschinen. CROCD K: E139 Stress u Autobahn 13(8)
291-294 ('62)
624.142/ .148 629.114.7 625.76
87. "Automatic Control in Road Warming." POWELL R: B441 Elec Rev 170 (26)
1113-1114 ('62)
88. "Electrical Heating of Roads to Prevent the Formation of Ice and Frost."
MHTFFIN A C, WILLIAMSON P J: C166 Heating 25 (206) 41-47 ('62)
625.76 624.142/ .148
89. "Calcium Chloride- Salt and Ice Control Tests." Winter 1960-61.
MILLER L: H83 Proc Highway Research Board 41 321-332 ('62)
625.76 624.139
90. "Rubber Snow Ploughs Prove Their Worth." H172 Rubber Develop 16(1)
13-15 ('63)
625.76 678.06:624 629.114.7
91. Chlorcalcium, ein Schnellwirkendes Streusalz zum Tauen von Eis und Festen
Schneebelagen auf Strassen. BUGGISCH H: E139 Strasse u Autobahn 14(1)
14-18 ('63)
625.75
92. "Data for Snow Melting Systems." A342 Air Condit Heating and Vent 60 (9)
81-84 ('63)
625.76
93. "Piping for a Snow Melting System." CULLEN W J: A342 Air Condit Heating
and Vent 60 (9) 69-76 ('63)
625.76
94. "Powered Equipment for Snow Clearance." D241 Oil Engine and Gas Turbine
31 (359) 48-49 ('63)
625.76 629.114.7
95. "Electric Road Heating in the United Kingdom." H481 Scot Elec Engr 34(11)
658, 660, 662 ('63)
625.76 621.365.3
96. "Can You Cut Costs with Snow Melters?" C125 Com Car J 106 (4) 92-93 ('63)
625.76 629.114.7
97. "Anti-Icing System Uses MI Cable in Conduit." B428 Elec Construct and
Maintenance. 62(12) 60-63 ('63)
625.76 621.365.4
98. "Snow Clearing." KENNARD A H: C309 J Inst. Munic Engrs 91 (1) 14-16 ('64)
624.142/ .148

of

99. "The Use/Stabilised Fly Ash in Road Construction." RAYMOND S SMITH P H:
B281 Civil Eng and Public Works Rev. 59(690) 70-72 ('64)
625.8 624.138.23 666.95
100. "Electric Road Heating in the United Kingdom." SHARPLES J T: E8 Roads and
Road Construct 41 (492) 381-385 ('63)
625.76
101. "Powering Vehicles for Snow Removal." D 241 Oil Engine and Gas Turbine
31(364) 26-27 ('64)
625.76 629.114.7
102. "Experimental Ice Warning System." WILLIAMSON P J: C645 Traffic Eng and
Control 5(8) 477-479, 497 ('63)
625.76 656.13.08 656.13/.18: 625.711
103. "All-Weather Design for Lancashire-Yorkshire Motorway." MAYNARD-LOVELL S:
C645 Traffic Eng and Control 5(8) 472-474 ('63)
625.72:624.05 656.13/ .18:625.711
104. "Road Heating the Mound." STOREY I G: C645 Traffic Eng and Control 5(8)
475 ('63)
625.76 656.13/.18:625.711 656.13.08
105. "Oil Engines for All-British Snow Blowers." D241 Oil Engine and Gas
Turbine 31 (365) 49 ('64)
625.76 621.436-182. 3/.4
106. "Frost Action Considerations in Highway Pavement Design." O'FLAHERTY C A:
C309 J Inst Munic Engrs 91(2) 33-43 ('64)
625.8 625.76
107. "Economics of Large Snow Melting Systems -- Design Criteria, Operation,
and Equipment Employed." HODGES K R: H288 Proc Am Power Conf 25 552-559('63)
624.142/ .148 625.76
108. "Snow Melting System Keeps Skyway's Toll Plaza Clear." ROSS J: C110
Heating Piping and Air Condit 36(3) 99-103 ('64)
625.76
109. Winterschaden an den Pflanzungen der Bundesautobahne SAUER G: E139
Strasse u Autobahn 15(2) 39-45 ('64)
625.77/.78
110. Bemessungsgrundlagen fur Verkehrssicherheitspflanzungen an Strassen.
ORTNER W: E140 Strassen u Tiefbau 18(7) 783 790-791 ('64) 625.76
111. "Hydraulic Side Gate on Snowplow Leaves Gaps in Snow Wall." STENGEL R F:
C257 Design News 19 (10) 38-39 ('64)
624.142/.148 629.114.7
112. 80 Jahre Staatliche Wildbach und Lawinenverbauung in Osterreich BOCK F:
E423 Intern Holzmarkt 55(11) 1-2, 4-6, 8 ('64)
624.18 624.142/ .148

113. Anlage zue Untersuchung Dynamischer Wirkungen von Bewegtom Schnee.
SALM B: E427 Z Angew Math u Phys 15 (4) 357-375 ('64)
624.142/ .148
114. Neues Warnsystem bei Glatteilagafahr. BELLINGER H: B345 Brucke u Strasse
16(8) 387-388 ('64)
625.76
115. "Design Requirements for Infrared Snow Melting Systems." FRIER J P:
CI47 Illum Eng 59 (10) 686-692 ('64)
624.142/148 621.365.46
116. "Problems of Snow and Ice Removal from Roads in the First Division of the
Tennessee State Highway Department." MANEY W: D493 Bull Eng. Expt.
Sta Univ Tenn 1964 (29) 57-59.
117. Beheizung von Fahrbahnen Brucken und Flugpisten-Flachenb-Eheizung im
Hochbau. STAHLHUT F: E140 Strassen u Tiessen u Tiefbau 18 (10) 1095-
1102 ('64)
118. Erlauten zum Vorlaufigen Merkblatt Uber auf Tausalze Gegen Winterglatte
auf Strassen. SCHAIBLE L: E140 Serassen u Tiefbau 13 (10) 1106-1119 ('64)
625.76
119. "Design Requirements for Snow Melting with Infrared." GIALANELI J: B428
Elec Construc and Maintenance 63(12) 67-69 ('64)
624.142/ .148 621.365.46
120. Rechauffage des Voies de Circulation Par Conducteurs Chauffants Pyrotenax.
B390 Construction 19 (12) LXXVII - LXXVIII ('64)
625.76 624.142/ .148
121. "Oil Fired Snow Melting." JOHNSON W J: B481 Eng J 47(12) 19-22 ('64)
624.142/ .148
122. "Pedestrian Controlled Snow Plough." BENNETT M D: E283 Trans Inst.
Engrs and Shipbuilders in Scot 108 (4) 139-153 ('64-'65)
625.76 629.114.7
123. Verwendung von Streusalzen im Winterdienst. BOHME D: K140 Strassen u
Tiefbau 19(2) 138.140- 141 ('65)
625.76
124. AEI and Road Safety. C378 Elec Distribution 5(24) 228-231 ('65)
625.76 621.312 Others
125. Maschinen und Gerate fur die Stadtreinigung und Strassenwartung. B518
Baumaschine u Bautech 12 (2) 75-79 ('65)
625.76
126. Zur Frage des Einflusses von Luftporengehalt und Zementart auf die
Bestandigkeit des Strassenbetons. SCHIMMELWITZ P, HENK B: E140
Strassen u Tiefbau 19 (5) 560, 562-569 ('65)
635.841/ .847 666.972.56

127. "Double-Blade Plow 'stores' Snow When Passing Driveway." MANN J E:
C257 Design News 20 (13) 24-27 ('65)
625.76 656.13/ .18:725.711
128. "Snow Free Surface: Welded Steel Pipe Systems." C107 Heating and Air
Conditioning 35(1) 26-28 ('65)
625.76
129. "Turn on the Heat Lamps - It's Snowing." LIEBMAN H: D409 Public Works
96 (8) 103-106 ('65)
625.76
130. "Road Heating." HUMPHRIES E F: C645 Traffic Eng and Control 6(11)
682-683, 687 ('65)
625.76 656.18/ .18:625.711
131. "Frost Protection of the Road Surface by Off-Peak Electric Heating."
GARDNER D H: D513 Repts Brit Elec and Allied Inds Research Assoc (5113)
1-19, 19 (1)- 19(7) ('65)
625.76 621.365.4 624.142/ .148
132. "The Great Industrial Snow Job." E207 Material Handling Eng 20 (9)
61-63 ('65)
625.76
133. Was Kann zur Erleichterung des Strassenverkehrs im Winter Getan Werden?
AHLBRECHT H: E77 Schweiz Tech 62 (47) 953-958 ('65)
625.76
134. "Understanding the Action of Salt." COULTER R G: D409 Public Works 96(9)
78-80 ('65)
625.76
135. Elektrische Beheizung von Fahrbahnen, Brucken und Pisten. WHIFFEN A C,
WILLIAMSON P C : B345 Bruckeu Strasse 17 (12) 599-600, 602, 604, 606, 608,
610 ('65)
625.76 624.21.095
136. "Design and Application of Electric Subsoil Heaters." JONES S O: A435
IEEE Papers (64-324) I, 1-6 ('64)
624.142/ .148 621.365.4
137. "Road-Heating Installations for a Variety of New Situations." LAWRENSONS
E: H481 Scot Elec Engr 36 (10)574-576 ('65)
625.76 621.365.4
138. "Economy Safety Requires Continued Improvement of Spreader Controls."
MALOTT H R: D409 Public Works 96 (11) 97-98 ('65)
625.76
139. Die Winterdienstorganissstion in der Stadt st Gallen. SCHLATTER N: H222
Strasse Verkehr 52 (2) 49-52 ('66)
625.76

140. "Electricity Does It Best. Snow Melting with Electric Heating Cable."
B424 Elec Heat Air Condit 12(1) 22, 27, ('66) -625.76 621.365.4
141. Der Winterdienst auf dem Julierpass. HAUSERMANN E: H222 Strasse Verkehr 52
(2) 53-56 ('66)
625.76
142. Die Winterlichen Strassenverhältnisse und die Streusalze. CARLIER A: H222
Strasse Verkehr 52(2) 57-62('66)
625.76 624.142/.143
143. Glatteisbekämpfung auf Autobahnen - Glatteisbekämpfung auf Strassen.
AHLBRECHT H:H222 Strasse Verkehr 52(2) 63-66 ('66)
625.76 624.142/.143
144. Warmwasser- in Kunststoff-Rohrsystem Zirkulierend- Ermöglicht Wirtschaftliche
Beheizung von Verkehrsflächen. HONORE R: E140 Strassen-Tiefban 20(2)
93-100 ('66)
625.76
145. Anwendung und Vorteile der Methode der Präventivsalzung. ZULAUF R: H222
Strasse Verkehr 52(2) 67-73 ('66)
625.76 624.142/.143
146. "Remarks on Snow Cornice Theory and Related Experiments with Sink Flows."
HESKESTAD G: A478 ASME Paper 65-WA/Fe-11 1-9
624.14 532.527 551.551 551.578.4
147. Gradientenberechnung. LACHMANN G: E140 Strassen-Tiefbau 20(6) 522,
524-528 ('66)
625.72: 624.05
148. "Electric Snow Melting Systems." LAWRIE R J: B428 Elec Construct Maint-
enance 65 (3) 110-114 ('66)
624.142/.148 621.365.4
149. Pflanzenschäden durch Streusalzverwendung im Winterdienst. ZULAUF R: H222
Strasse Verkehr 52(10) 519, 526 ('66)
150. Praktische Versuche zur Erforschung der Korrosions - Eigenschaften von zur
Enteisung von Strassen Verwendeten Streusalzen (Tausalzen). BUKOWIECKI A:
H222 Strasse Verkehr 52(8) 435-446 ('66)
625.76 629.113.004.5/.6 620.193
151. Der Winterdienst auf den Strassen im Kanton Aargau. HALLER H: H222 Strasse
Verkehr 52(12) 596-600 ('66)
625.76
152. Beseitigen von Schneewachten durch Sprengungen. HEINDENREICH K: B210
Bohren-Sprengen-Räumen 15(11) 283-284 ('66)
624.142/.148
153. Die Pflanzen und Ihre Salztoleranzstufen. ZULAUF R: H222 Strasse Verkehr
52(12) 601-605 ('66)
625.76 625.734

154. Strassenwinterdienst und Wirtschaftlichkeit. AHLBRECHT H: E140 Strassen-Tiefbau 20 (12) 1042-1044('66)
625.76
155. "Problems of Snow and Ice." MANEY W C: D493 Bull Eng Expt. Sta Univ Tenn (31) 56-58 ('66)
625.76 624.142/.148
156. "Protecting Concrete Against De-icing Chemicals." C621 Prog Architecture 47(11) 190 ('66)
625.76
157. "Prix de Revient Compares des Differents Traitements Hivernaux en France." LACOURBAS R: H148 Rev Gen Routes et Airodromes 37(417) 105-109 ('66)
625.76
158. "Winter Maintenance in the Laurentians - Expensive but Essential." TRUDEAU R T: D409 Public Works 98(2) 103-105 ('67)
625.76
159. "Chauffage Electrique des Ouvragers." B390 Construction 21(12) 409-410 ('66)
625.76
160. "Hot Slabs Melt Snow." MC GUINNESS W J: C621 Prog Architecture 48 (4) 203 ('67)
625.76
161. Die Entwicklung des Winterdienstes auf den Bundesfernstrassen von 1956 bis 1966. AHLBRECHT H: E140 Strassen Tiefbau 21 (2) 67-68, 70, 72, 74, 76-82, 84 ('67)
625.76
162. Proefneming met Elektrische Wegdekverwarming. PRINS C: D260 Electro-Tech 45-(8) 184-186 ('67)
625.76 621.365.4
163. "Snow Blower Attaches to Tractor." MANN J E: C257 Design News 22(10) 80-81 ('67)
625.76 629.114.7
164. "Frost Protection of Roads." GRIFFITH M V, GARDNER D H: B443 Elec Times 151(22) 893-895 ('67)
625.76 621.3654
165. Chauffage des Chaussees. CEINTREY. Bertoye: H148 Rev Gen Routes et Aerodromes 37(422) 81-85 ('66)
625.76
166. "Snowshed Location and Design." SCHAEERER P A: D415 Proc Am Soc Civil Engrs J. Highway Div 92 (2) 21-33 ('66)
625.735/.738
167. "Blackfriars Bridgehead Scheme Lighting and General Electrical Services," described HALL H W: B443 Elec Times 152(4) 128-130 ('67)
625.74 628.971.6 621.312 Others.

168. Schnellere Fruhjahrensryumung Unserer Passtrassen dank nank Neuartiger Hochleistungsschneider. E77 Schweiz Tech Z 64 (24) 554-555 ('67)
169. Vornaingungen fiir einen Wirtschaftlichen und Wirkungsvollen Praventinsatz mit Streusalzen. ZULAUF R: H222 Strasse Verkehr 53(4) 160-170 ('67) 625.76
170. "Route de la Forclaz." CLEUSIX Ch: H222 Strasse Verkehr 53(6) 260-264 ('67) 625.735/.738
171. "Blackfriars Road Warming" THOM R B: B443 Elec Times 152 (4) 125-127 ('67) 625.76 621.365.4
172. Aus der Forschungsarbeit Uber MgCl₂-Losung im Strassen-Winterdienst. LEISER K, DOMBROWSKI G: C871 Strasse 7(5) 220-226 ('67) 625.76
173. "Galeries de Protection Contr les Avalanches sur la Route du Simplon." DELFGLISE B: H222 Strasse Verkehr 53(6) 268-271 ('67) 625.735/.758
174. "Automatic 'Icy Road' Sign Study." PB 174010 1-20 (n.d.) 625.761/.768 656.1.08
175. "Snow Removal Methods and Equipment by Country Roads Board of Victoria Snowy Mountains Hydro-Electric Authority." GLAZEBROOK T M, MC RAE G A: C306 J Inst Engrs Australia 39 (9) 151-160 ('67) 625 761/, 768
176. "This Winter -- Use the Right De-Icer on Concrete Pavements." WOOD F O: C860 Mod Concrete 31(6) 55-56 ('67) 625.761/.768
177. "Electric Snow Melting Systems." POTTER W G: D509 ASHRAE J 9(10) 35-44 ('67) 625.761/.768
178. "Plowing and Loading Snow- One Machine Can Do Both." D409 Public Works 98(11) 98-99 ('67) 625.76.08 625.76.08.002.5
179. "Snow Catch by Conifer Crowns." SATTERLUND D R, HAUPT H: B706 Water Resources Res 3(4) 1035-1039 ('67) 624.142/.148 761/.768
180. "Infrared Heating Gives Utility Slip Free Sidewalks." B447 Elec World 169 (1) 33('68) 625.761/.768 621.365.46
181. "Snowdrift Control Through Highway Design" CRON F W: D408 Public Roads 34(11) 227-234 ('67) 625.738 624.142/.148

182. Die Bekämpfung der Fahrbahnglatteaut und Deutschen Bundesfernstrassen
 AHLBRECHT H: B345 Brucke u Strasse 20 (2) 33-38 ('68)
 625.761/.768
183. "Highway Bridge and Airport Runway Detection System Predicts Frost and Ice
 Conditions Before They Occur." CIEHCCHCTSKI M F: D244 SAE Paper
 (680117) 1-8 ('68)
 625.761/.768 620.1.05/.08:531.7.681
184. "L'employ des Fondants en Viabilite Hivernale." H148 Rev Gen Routes
 Aerodromes 38(43) 39-44-51 ('68) 625.761/.768
185. Neue Erkenntnisse über das Schneegleiten GAND H: E73 Schweiz Bauztig
 86(31) 557-561 ('68)
186. "Custom Designed: Electric Snow Melting in Downtown Minneapolis."
 B428 Elec Construct Maintenance 67(7) 89-94 ('68)
 625.761/.768 621.365.3/4
187. Grenzen des Modernen Lawinerbaues im Anrissgebiet." SCHWARZ W: E73
 Schweiz Bauztg 86(31) 562-565 ('68)
 624.142/.148
188. "Snow." PARKHILL S M: B301 Compr Air Mag 63(12) 24-25 ('68)
 551.578.4
189. "Snow Accumulations in North Greenland." BULL C: C295 J Glaciol 3(24)
 237-248 ('58)
 551.578.4 (988)
190. "Application of Snow Hydrology to the Columbia Basin." JOHNSON O A,
 BOYER P B: D419 Proc Am Soc Civil Engrs. 85(HY-1) 61-81 ('59)
 551.579 627.11 (282.271.2) (71)
191. "The Electrification of Antennae by Snow and Rain Falls." MAGONO C,
 TAKAHASHI T: C322 J Meteorol 16 (4) 388-392 ('59)
 551.594.25
192. "La Fusion de la Neige et les Crues de Juin 1957 dans les Alpes Francaises."
 POGGI A: C122 Houille Blanche 14(B) 934-941 ('59)
 551.579.2 627.511 (234.313)
193. "Automatic Telemetry Equipment Aids Avalanche Prediction." NEAL G: C194
 Can Electronics Eng 6 (4) 40-43 ('62)
 551.506.824
 551.578.48 621.396.1 621.317.083.7
194. La Neige et les Avalanches. Les Avalanches de Janvier-Fevrier 1961 dans
 les Alpes du Nord." POGGI A: D69 Meteorologie 1961 (62) 155-170 ('61)
 551.578.482
195. Ein Glatteiswarngerat für Strassen und Autobahnen KRAUS H, ROTH R: D70
 Meteorol Rundschau 16(4) 102-105 ('63)
 551.574 551.5.004.14 551.509.32 625.76

196. "Snow Surveying with Aerial Photography." FINNEGAN W J: D319 Photogramm
Eng 28(5) 782-790 ('62)
551.578.4 528.74
197. Zum Abbau der Schneedecke. HOFMANN G: A518 Arch Meteorol Geophys u
Bioklimatol Ser B 13(1) 1-20 ('63)
551.578.4
198. Die Dauer der Schneedeck in Zurich. UTTINGER H: A518 Arch Meteorol
Geophys u Bioklimatol Ser B 12 (3/4) 404-421 ('63)
551.578.4 (494)
199. Methoden der Plastizitatstheorie in der Schneemechanik ZIEGLER H: E427
Z Angew Math u Phys 14 (6) 713-737 ('63)
551.578.4
200. "On the Problem of Determining the Degree of Avalanche Hazard in the
High Mountain Regions of Central Tien Shan." KRASMOSEL SKII E B: C804
Soviet Hydrol 1964 (1) 80-85
551.578.4 (235.216)
201. "Snow Crystal Forms and Riming Effects as Related to Snowfall Density and
General Storm Conditions." POWER B A, SUMMERS P W, D'AVIGNON J: C322
J Atmospheric Sci 21(3) 300-305 ('64)
551.578.4 551.508.7
202. "Mesures de la Neige." DEVEAU J: D69 Meteorologie (70) 265-288 ('63)
551.508.77 551.578.4
203. "Determination of Water Equivalent of Snow Cover by Method of Aerial
Gamma-Survey." KOGAN R M, NIKI-FOROV M V, FRIDMAN S D, CHIRKOV V P,
YAKOVLEV A F: C804 Soviet Hydrol (2) 183-187 ('65)
551.579
204. "River Flows, Forecasts and Probabilities." QUICK M C: D419 Proc Am Soc
Civil Engrs J. Hydraulics Div 91(3) 1-18 ('65)
551.482.215.3 627.15
205. "A Surface Method of Measuring the Water Equivalent of Snow by Means of
Soil Radioactivity." ZOTIMOV N V: C804 Soviet Hydrol (6) 537-547 ('65)
551.578.4
206. "Calculation of Average Snow Storage in a Basin Allowing for Snow Accumu-
lation in the Forest." PASHOVA L T: C804 Soviet Hydrol (6) 586-590 ('65)
551.482.215.7 551.48:626/628
207. "Shooting Urad's Snowslides." WATSON F J: B301 Compr Air Mag 72(2) 4-7 ('67)
551.573.4 622.03
208. "Experience with the Pressure Pillow as a Snow Measuring Device." PENTON
V E, ROBERTSON A C: B708 Water Resource 3(2) 405-408 ('67)
551.508.7 551.48:626/628
209. "Successful Ice Dusting at Fairbanks Alaska 1966." COOK R G, WADE M D, Jr. D419
Proc Am Soc Civil Engrs J Hydraul Div 24(1) 31-41 ('68) 551.482.215.3