

Research Report
Research Project T9903, Task 81
Hwy Reconstruct—WSDOT

**EVALUATION OF
THE FULL WEEKEND CLOSURE STRATEGY
FOR HIGHWAY RECONSTRUCTION PROJECTS
I-405 TUKWILA TO FACTORIA**

by

Phillip S. Dunston
Assistant Professor

Fred L. Mannering
Professor and Chair

Doohee Nam
Research Associate

Jinsun Lee
Research Assistant

Bonnie M. Savage
Research Assistant

Department of Civil Engineering
University of Washington, 352700
Seattle, Washington 98195

Washington State Transportation Center (TRAC)
University of Washington, Box 354802
1107 NE 45th Street, Suite 535
Seattle, Washington 98105-4631

Washington State Department of Transportation
Technical Monitor
Tom L. Nelson
Chief Construction Engineer

Prepared for

Washington State Transportation Commission
Department of Transportation
and in cooperation with
U.S. Department of Transportation
Federal Highway Administration

December 1998

TECHNICAL REPORT STANDARD TITLE PAGE

1. REPORT NO. WA-RD 454.1	2. GOVERNMENT ACCESSION NO.	3. RECIPIENT'S CATALOG NO.	
4. TITLE AND SUBTITLE Evaluation of Full Weekend Closure Strategy for Highway Reconstruction Projects: I-405 Tukwila to Factoria		5. REPORT DATE December 1998	
		6. PERFORMING ORGANIZATION CODE	
7. AUTHOR(S) Phillip S. Dunston and Fred L. Mannering		8. PERFORMING ORGANIZATION REPORT NO.	
9. PERFORMING ORGANIZATION NAME AND ADDRESS Washington State Transportation Center (TRAC) University of Washington, Box 354802 University District Building; 1107 NE 45th Street, Suite 535 Seattle, Washington 98105-4631		10. WORK UNIT NO.	
		11. CONTRACT OR GRANT NO. T9903, Task 81	
12. SPONSORING AGENCY NAME AND ADDRESS Washington State Department of Transportation Transportation Building, MS 7370 Olympia, Washington 98504-7370		13. TYPE OF REPORT AND PERIOD COVERED Research Report	
		14. SPONSORING AGENCY CODE	
15. SUPPLEMENTARY NOTES This study was conducted in cooperation with the U.S. Department of Transportation, Federal Highway Administration.			
16. ABSTRACT <p style="text-indent: 40px;">In August 1997, the Washington State Department of Transportation (WSDOT) adopted a strategy of closing a single direction of freeway over an entire weekend for constructing the overlay on a 5.5-mile (8.85-km) section of I-405. Work was performed over two weekends. Data were collected from field measurements, records, and surveys to assess construction quality, construction costs, and user impacts. Results were compared to historical data from WSDOT and from an NCHRP synthesis study.</p> <p style="text-indent: 40px;">Overlay surface smoothness, density, and gradation quality were good, and no difference in consistency was found between night and day paving. Public response from motorists was decidedly positive, while business perceptions were mixed. Traffic simulations indicated that the total closure was preferable to single lane closures over multiple nights.</p> <p style="text-indent: 40px;">A decision checklist was developed for use in making the closure strategy decision.</p>			
17. KEY WORDS Asphalt overlays, highway reconstruction, highway rehabilitation, weekend closures, weekend paving, user impacts, quality		18. DISTRIBUTION STATEMENT No restrictions. This document is available to the public through the National Technical Information Service, Springfield, VA 22616	
19. SECURITY CLASSIF. (of this report) None	20. SECURITY CLASSIF. (of this page) None	21. NO. OF PAGES 160	22. PRICE

DISCLAIMER

The contents of this report reflect the views of the authors, who are responsible for the facts and the accuracy of the data presented herein. The contents do not necessarily reflect the official views or policies of the Washington State Transportation Commission, Department of Transportation, or the Federal Highway Administration. This report does not constitute a standard, specification, or regulation.

TABLE OF CONTENTS

<u>Section</u>	<u>Page</u>
Executive Summary	xi
Chapter 1. Introduction.....	1
Subject and Scope of Study	1
Objectives.....	3
Construction Site Safety.....	3
Construction Quality	3
Construction Costs	3
User Impacts	4
Public Information Campaign	5
State Highway Agency Survey	5
Checklist Formulation.....	5
Chapter 2. Literature Review	6
Productivity	6
Quality.....	6
Motorist Safety.....	7
Construction Costs	8
User Costs	8
Lighting	8
Summary	9
Chapter 3. Comparison of Production Rates	11
Comparison with I-5 Nighttime Rates	11
Truck Production Rates.....	14
Chapter 4. Quality Characteristics of the Overlay	16
Surface Smoothness	16
In-Place Densities	18
Overview of Density Results	18
Densities in Perspective	22
Gradation.....	23
Longitudinal Joints.....	26
Cyclic Segregation	27
Other Surface Defects	27
Summary	28
Chapter 5. Analysis of Pay Factors	29
In-Place Density	29
Gradation Pay Factors	34

Chapter 6. Survey Results: Public Feedback	36
Descriptive Statistics	36
Estimation Results.....	40
Travel Impacts.....	40
Information Dissemination	42
Effectiveness of Plan.....	42
Business Impacts.....	43
Modeling Results: Discrete Choices	44
Impact of Travel Plan by the Weekend Closure of I-405	44
Route Selection	45
Departure Time	45
Trip Cancellation.....	45
Shopping Behavior.....	46
Awareness of the I-405 Closures	46
Chapter 7. Business and Retail Impacts of Closures	47
Chapter 8. Traffic Operational Impacts of Closures.....	50
Simulation of I-405 Closures	50
Scenario: Half-Closure.....	52
Chapter 9. Experiences of Other State Highway Agencies	54
Number of Projects	54
Preferred Lane Closure Strategy	54
Quality from Preferred Strategies	56
Public Response and Feedback	58
Approaches under Consideration	59
Summary	60
Chapter 10. Decision Process Checklist	61
Chapter 11. Conclusions and Recommendations.....	66
Construction	66
User Impact and Public Reaction	66
Decision Making	67
References	69
Appendix A. Methodology.....	A-1
Appendix B. Probit and Binary Logit Model Estimation Results	B-1
Appendix C. Surveys.....	C-1

C1. Motorist Survey	C-3
C2. State Highway Agency Survey.....	C-7
Appendix D. Comments from Motorists.....	D-1
Appendix E. SR 405 Mainline Overlay Report	E-1
Appendix F. Media Coverage	F-1

LIST OF FIGURES

<u>Figure</u>		<u>Page</u>
4-1	Frequency Histogram of Average Rice Density Percentages for Each Direction.....	19
4-2	Frequency Distribution of Rice Density Percentages for All Mainline Paving	20
4-3	Average Rice Density Throughout Paving Operations	20
4-4a	Trend for Southbound Average Rice Densities	21
4-4b	Trend for Northbound Average Rice Densities	22
5-1	Pay Factors Versus Average Densities for Southbound Paving	30
5-2	Pay Factors Versus Average Densities for Northbound Paving	30
5-3	Plot of Pay Factors and Average Densities for Southbound Paving ..	31
5-4	Plot of Pay Factors and Average Densities for Northbound Paving ..	32
5-5	Pay Factors and Range of Rice Density Percentages for the Southbound Direction	33
5-6	Pay Factors and Range of Rice Density Percentages for the Northbound Direction	33
6-1	Distribution of Age	37
6-2	Income Distribution of Respondents.....	38
6-3	Educational Level of Respondents.....	38
6-4	Responses to the Statement That the Weekend Closures of I-405 Had a Major Impact on Travel Plans	41
6-5	Responses to the Statement That the State and the Media Did a Good Job of Making the Public Aware of the I-405 Closures.....	42
6-6	Responses to the Statement That Closing the Highways Completely for a Weekend Is Better Than Closing a Few Lanes During the Day for Several Days	43
6-7	Responses to the Statement That the Weekend Closure of I-405 Had a Significant Negative Impact on Area Businesses	44
7-1	Number of Respondents from Specified Locations	47
7-2	Average Ratings of Business Impacts Attributable to Closures by Respondent Location.....	48
7-3	Ratings of Impacts upon Trucking Firms	49
8-1	Simulation Process	51
8-2	The Percentage Change Resulting from the Closures	52
8-3	The Percentage Change Resulting from Half-Closure.....	53
A-1	Effects of Change in x on Predicted Probabilities.....	A-13

LIST OF TABLES

<u>Table</u>		<u>Page</u>
3-1	Production by Shift from I-405 Project.....	13
3-2	Production Rates for I-405 in Comparison with Nighttime Project on I-5	13
3-3	Truck Productivity for I-405 in Comparison with I-5 Nighttime Project	14
4-1	Southbound Profilograph Summary.....	17
4-2	Northbound Profilograph Summary.....	17
4-3	Comparison of Average Rice Density Percentage Parameters to Early QA	22
4-4	Comparison with Reported Standard Deviation of Asphalt Concrete Air Voids for Roadway Compacted Mixtures	23
4-5	Gradation Summary for I-405 Project	24
4-6	Comparison with Typical Asphalt Concrete Aggregate Gradation Variability from Extraction Tests	25
4-7	Comparison with Typical Asphalt Cement Content Variability	26
5-1	Pay Factors and Standard Deviations for AC Mix Items	35
6-1	Summary of Respondents' Socioeconomic Attributes	37
6-2	Summary of Respondents' Travel-Related Behaviors	40
8-1	Simulation Results (Weekend Peak Hour).....	51
8-2	Simulation Results with Half-Closure (Weekend Peak Hour).....	53
9-1	Number of Projects Exceeding 25,000 Tons	55
9-2	Survey Responses on Preferred Closure Strategies	55
9-3	Survey Responses for Overlay Quality Parameters	56
9-4	Survey Responses for Performance Parameters Not Related to Overlay Condition.....	57
9-5	Survey Responses—Reaction and Feedback from Public	58
9-6	Closure Strategies under Consideration.....	59
10-1	Closure Strategy Decision Process Checklist for Routing Impacts ..	62
10-2	Closure Strategy Decision Process Checklist for Contractor Considerations.....	63
10-3	Closure Strategy Decision Process Checklist for WSDOT Functions	64
A-1	The Format of the NW.DAT Input File	A-4
A-2	The Format of the OD.DAT Input File	A-4
A-3	The Format of the CN.DAT Input File	A-5
B-1	Ordered Probit Model Estimation Results for Opinions That the Weekend Closures of I-405 Had Major Impact on Travel Plans	B-3
B-2	Ordered Probit Model Estimation Results for Opinions That the State and the Media Did a Good Job of Making the Public Aware of the I-405 Closures	B-4
B-3	Ordered Probit Model Estimation Results for Opinions That Closing the Highways Completely for a Weekend Is Better Than Closing a Few Lanes During the Day for Several Days	B-5
B-4	Ordered Probit Model Estimation Results for Opinions That the Weekend Closure of I-405 Had a Significant Negative Impact on Area Businesses	B-6
B-5	Multinomial Logit Model Estimation Results of the Impact on Travel Plans by the Weekend Closure of I-405	B-7

B-6	Multinomial Logit Model Estimation Results of Routes Taken Because of the Weekend Closure of I-405	B-8
B-7	Binary Logit Model Estimation Results of Departure Time Change Because of the Weekend Closure of I-405	B-9
B-8	Binary Logit Model Estimation Results of Trip Cancellation	B-10
B-9	Multinomial Logit Model Estimation Results of Change of Shopping Places	B-11
B-10	Multinomial Logit Model Estimation Results of Awareness of the I-405 Closures before They Happened on August 15-18 or August 22-25	B-12

EXECUTIVE SUMMARY

In the summer of 1997, the Washington State Department of Transportation (WSDOT) tested a strategy of closing a single direction of freeway over an entire weekend to accelerate reconstruction on an approximately 5.5-mi. (8.85-km) section of Interstate 405 (from Coal Creek to Sunset Boulevard). For two weekends, all lanes in a single direction—three each—were closed for construction around the clock from Friday evening until Monday morning. The agency expected that these closings would have a significant impact on users and the local residential and business communities because of the few alternative high speed routes in that area. However, the customary practice of frequent night closures of one or two lanes would be likely to extend the period of inconvenience to the public. Therefore, WSDOT requested that researchers from the University of Washington study the project to document benchmark quality and impact data for assessing the weekend closure strategy and to develop recommendations for selecting projects that are suited to the weekend closure strategy.

CONSTRUCTION AND RESEARCH METHODOLOGY

The work, performed over the weekends of August 15 and August 22, 1997, was executed as a portion of project *C4756 Tukwila to Factoria SC&DI Stage I*. The contract specified a 0.15-ft (46-mm) ACP Class A overlay, and mainline tonnages of 16,990 tons (15,410 metric tons) were planned for the southbound lanes and 17,776 tons (16,123 metric tons) for the northbound lanes. The contractor provided AC mix from a mobile rotary drum plant erected in a private business parking lot located about .25 mi. (.4 km) from the southern end of the work zone. Mainline paving was executed with a single paver, and the AC mix was transferred to the paver from a windrow by way of a pickup device. Two roller compactors were used during each weekend. Ramp and shoulder paving was accomplished with a second paver and was not included in the scope of this

study. The contractor's crews worked 12-hour shifts, and traffic control was provided by WSDOT with the assistance of off-duty police officers.

The investigation focused upon issues of construction quality and construction and user impacts. Construction quality was assessed through the collection and analysis of smoothness and in-place density data and through examination of longitudinal joints and other factors. Where possible, results from the I-405 project were compared to data documented from typical projects both within and outside the state of Washington. Production rates, as an indicator of construction costs, were calculated and compared to rates from a comparable nighttime project. User impacts were assessed through surveys of motorists and local businesses. The researchers also conducted a simulation analysis of traffic response to the complete single direction weekend closure versus many nights of single- or multiple-lane partial closure. An additional survey of several state highway agencies was conducted to discover which innovative strategies are being used elsewhere for highway reconstruction or rehabilitation.

RESULTS

Construction

Actual total tonnages for the two weekends were 29,393 tons (38,496 metric tons) on the southbound direction and 19,019 tons (17,250 metric tons) on the northbound direction. The I-405 closure was compared with a similar I-5 project (C4250) from the Nisqually River to the Gravelly Lake Interchange. The I-5 project overlay was constructed with nighttime closures during the 1993 and 1994 paving seasons. The 1994 overlay was constructed with the addition of a mass transfer device. The shift production rates for the I-405 project ranged from 277 tons per hour (251 metric tons per hour) to 413 tons per hour (375 metric tons per hour). The average shift production rate for the I-405 overlay was about 350 tons per hour (317 metric tons per hour). This quantity was 23 percent greater than the shift production from the 1994 overlay on I-5, which utilized the mass transfer device.

Examination of average truck productivity revealed two interesting points. First, the addition of the mass transfer device apparently did not have any effect on truck resource utilization for the I-5 project, despite a marked increase in production rates. The second point was that the paving technique for the I-405 project resulted in essentially 2 times the truck productivity achieved on the I-5 project. These higher productivities most likely resulted from the close proximity of the mobile asphalt plant and the high degree of access the trucks had to the work site.

Surface smoothness was measured with a California profilograph. Segments measured from sections that were paved during both nighttime and daytime hours revealed no difference in smoothness between night and day paving. Maximum values for the roughness measurements did not exceed a 5 in./mi (80 mm/km) limit taken from a supplemental specification that has been used by one of the WSDOT regions (although not on this project), indicating high quality surface smoothness.

Statistical analysis confirmed that there was no difference between night and day average in-place densities, and variability was also consistent between night and day. The average Rice density of 93.14 percent compared favorably to averages from earlier projects, and the resulting 6.8 percent air voids suggests a satisfactory period of service from the overlay (each percent above 7 means a 10 percent reduction in pavement life).

Gradation and asphalt cement content were both well within the specified ranges, and standard deviations were typically lower than those documented in an NCHRP synthesis study. Problems with the longitudinal joints indicated a need to consider improved lighting and the rate of roller compaction relative to the high speed of paving. No instances of cyclic segregation were noted on this project.

User Impacts

Public response to the weekend closure strategy, obtained via motorist and business surveys, was generally positive. Most motorists (87 percent) were decidedly in favor of the weekend closure strategy over frequent partial closures. About 88 percent

agreed that timely notification enabled most people to make plans to avoid the work zone during the weekends of construction, indicating a successful public information campaign. Specific response strategies related to such factors as age, gender, education, family characteristics, home location, and income were analyzed with binary logit models. Businesses provided more mixed results, although most indicated no impact upon their weekend business operations.

Traffic operational impacts were analyzed through the application of the calibrated traffic assignment model XXE. Both vehicle travel time and distance (vehicle-miles) traveled increased slightly and had only minimal impact on system performance.

Survey of State Highway Agencies

A survey of several state highway agencies (SHAs) indicated that the preferred and most frequently used overlay strategy is single-lane nighttime closures, which generally result in greater variability in densities, a rougher surface, more instances of cyclic segregation, and lower quality longitudinal joints. The I-405 data showed that high performance in these areas can be accomplished with either the nighttime closure or the weekend closure strategies. Innovative approaches the SHAs are considering are most commonly either A+B contracting or lane rental arrangements, both of which tend to put the burden for initiating innovation on the contractor.

Decision Making Checklist

After the positive results gathered during the course of this study had been considered, a decision checklist was developed as an aid to decision makers in determining the appropriate closure strategy for a given project. The checklist is divided into three parts: (1) routing impacts, (2) contractor considerations, and (3) WSDOT functions. The checklist is recommended as a guide for assembling critical information and support for the full weekend closure option versus the nighttime closure option. Because closure policy must ultimately involve qualitative decisions, a deterministic checklist was considered impractical.

CHAPTER 1 INTRODUCTION

Highway reconstruction in congested urban areas is typically performed by partially closing the highway, and often the work is conducted during nighttime hours. The advantage of these nighttime closures is that they avoid huge impacts upon users and the surrounding community during daytime hours when traffic flow is considerably higher. There is a potential downside to nighttime closures, however. The practice may extend the period of inconvenience that is still felt, albeit at different levels, by users and local residents. In addition, and especially true for large projects, the frequent mobilizations and shutdowns that are required inhibit productivity and, in many cases, may even impact construction quality.

As an alternative to frequent night closures, complete shutdown of a single direction of traffic during a weekend is a potentially attractive option. At this time, however, no data exist to use as a guide in deciding between these two closure options. In an attempt to provide initial answers to questions concerning the weekend closure strategy, the goal of the research presented in this report was twofold. One purpose was to document benchmark data on the weekend closure option that can be used in assessing closure strategies for highway reconstruction. The second was to use the documented results in developing a decision making process for choosing the best closure option for future reconstruction projects.

SUBJECT AND SCOPE OF STUDY

The analysis of data collected from this project was designed to assess how the single direction weekend closure strategy compares to the strategy of numerous nighttime closures. As a pilot project, the Washington State Department of Transportation (WSDOT) adopted a weekend closure approach to complete overlay operations on a section of I-405 as part of project *C4756 Tukwila to Factoria SC&DI Stage 1* during August of 1997. All

traffic lanes were closed in a single direction—three each—for two consecutive weekends. The agency expected that these closings would have a significant impact on users and the local residential and business communities because the number of alternative high speed routes in that area is limited.

The contract specified a 0.15-ft (46-mm) ACP Class A overlay and a minimum 0.06-ft (18-mm) ACP Class G prelevel. The project was bounded by the Sunset Boulevard bridge to the south and the Coal Creek Parkway bridge to the north, a distance of about 5.5 miles (8.85 km). Projected total tonnage for the southbound direction was 20,932 tons (18,985 metric tons), and 22,013 tons (19,966 metric tons) was projected for the northbound direction. The southbound overlay was constructed over the weekend of August 15th, while the northbound overlay was constructed during the weekend of August 22nd. Hours allotted for paving were from 8:00 p.m. on Friday to 5:00 am on Monday for each weekend. The prime contractor for the project was Tri-State Construction, Inc., and the paving subcontractor was M. A. Segale, Inc. M. A. Segale is hereafter referred to as the “contractor.”

The contractor provided AC mix from a mobile rotary drum plant in Boeing parking lot #6, located .25 mi. (.4 km) from the Park Avenue ramps, the truck access point near the southern end of the project. Mainline paving was executed with a single paver, and the AC mix was transferred to the paver from a windrow by way of a pickup device. Two roller compactors were employed during the first weekend. Although four rollers were made available for the second weekend to better keep pace with the paver, two broke down. Ramp and shoulder paving was accomplished with a second paver. The contractor’s crews worked 12-hr shifts.

Traffic control for the project site was provided by WSDOT. Washington State Patrol and City of Renton off-duty police officers assisted with monitoring ramps and flagging through signalized intersections, respectively. An excerpt from the mainline overlay report prepared by the project engineer is included in Appendix E. In addition, a list

of television news story tapings and a collection of newspaper articles are included in Appendix F.

OBJECTIVES

Determination of the more desirable closure option requires identification of key parameters, measurements, observations, and analyses. Focus for this study was placed upon construction quality, construction costs, and user costs. Documentation requirements were met by field data collection, literature review, surveys of the public's opinions, and development of traffic simulations. Specific issues addressed in the performance of this study are cited below.

Construction Site Safety

It was expected that full traffic closure in a single direction would automatically produce a safer construction site. Because an accident in the work area is unlikely for this type of closure strategy, the assessment of work zone safety was based on a review of the literature that provided insight on the relative safety aspects of the two alternative construction strategies.

Construction Quality

The longer periods of uninterrupted work afforded by the weekend closure alternative raised the question of whether consistent quality could be achieved through the night-day cycles. Changes in temperature and lighting might have negative impacts upon the levels of quality that could be achieved in smoothness of ride, density, longitudinal joint construction, and other factors. Offsetting the potentially negative impacts was the fact that the contractor had the luxury of a closed work site and thus the opportunity to reach and maintain a consistent level of production throughout the weekend closure.

Construction Costs

Construction costs are difficult to compare between projects because of the number of variables such as contractor resources, logistics, project size, scope of work, and environment. It is more illuminating to compare performance rates for major work items.

Cost differences between the weekend closure strategy and the nighttime closure strategy were indirectly assessed in this study from examination of paving production rates. The project production rates were also compared with available historical data from a comparably sized nighttime project.

User Impacts

In comparing the partial shutdown of heavily trafficked lanes to a complete weekend shutdown of a single direction of traffic, user costs are an important concern. The most significant costs are the increases in travel time caused by the reduction in system capacity and subsequent route diversion, as well as potential impacts on businesses. The impacts on retail businesses become a critical factor when weekend closures are considered.

In terms of travel time impacts, direct measurement is virtually impossible because of the natural variation in congestion (i.e., incident-induced and variability in recurring congestion) and possible postponement or cancellation of trips. However, an indirect approach can provide valuable insight into user impact. Estimates were made of two components of user costs. First, a series of traffic simulations were created with the traffic assignment software developed at the University of Washington and utilized in previous state-sponsored research with productive results (Trowbridge et al. 1996; Garrison et al. 1989). This simulation model measures delay due to queuing, total vehicle travel time, vehicle emissions, and changes in vehicle-kilometers traveled. Second, because there is always uncertainty with respect to the extent to which travelers will postpone or cancel their trips, the investigators distributed a mail-back survey to ask travelers how their travel patterns had changed in response to the weekend closing of I-405. The sample of travelers was drawn from vehicle license plates observed on the I-405 facility during non-construction weekends. The combination of these two indirect approaches provided a good estimate of the travel-related impacts on users.

Business impacts were measured directly by choosing a representative sample of businesses. Thirty area businesses were polled.

Public Information Campaign

Public opinion data were also collected through the survey of I-405 travelers. In addition to questions relating to changes in travel patterns, travelers were asked to assess the effectiveness of the information campaign conducted to warn the public of the forthcoming closures and about their overall impressions. The information was then analyzed with ordered probability models to determine the factors that underlie the impressions travelers developed.

State Highway Agency Survey

A few state highway agencies (SHAs) were polled for information regarding their closure strategies for constructing ACP overlays. Their responses provided information on current preferences and results, as well as innovations that are being considered for implementation.

Checklist Formulation

An important product of this study is the recommendation of a decision checklist. Formulation of the decision checklist was based on results of the data analysis, opinion surveys, observations, consultation with WSDOT personnel, and insights from literature. The items included in the checklist give careful consideration to the impacts, benefits, and costs associated with the selection of an alternative closure strategy.

CHAPTER 2 LITERATURE REVIEW

A general literature review of construction operations on major highways did not yield information directly related to full weekend closures. The sources most relevant to this study described factors that contribute to differences between daytime and nighttime paving and, in a more general sense, the issue of motorist accident rates near the work zone. Although the literature does not address the specific situation being studied, this body of information may be useful for identifying potential key issues in the day-night cycles of weekend paving. Topic areas where this literature review might be reasonably relevant are construction productivity, construction quality, construction and user costs, and public safety.

PRODUCTIVITY

Hinze and Carlisle (1990) outlined many of the factors related to nighttime paving productivity and evaluated their relevance. They held that traffic volume, type of work, material delivery, lighting, supervision, communication, and worker morale were among the factors that affect nighttime versus daytime paving productivity. Price (1986) compared the quality and cost of daytime and nighttime projects in Colorado and postulated that the material delivery rate will increase because of less traffic, which normally contributes to idle time. He also stated that temperature extremes could have an adverse effect on crew and equipment performance. Ellis and Kumar (1993) examined differences in cost and productivity between nighttime and daytime paving in Florida and found that nighttime paving production rates were no better than those for daytime paving.

QUALITY

A significant question to be answered is whether continuous paving produces an appreciable difference in paving quality. Researchers have acknowledged that nighttime paving introduces the potential for effects from numerous factors related to supervision,

material quality, and worker effectiveness (Read 1996; Hinze and Carlisle 1990; Price 1986). Temperature gradient effects may have an impact on the quality levels achieved with compaction, longitudinal joints, and cyclic segregation. Read (1996) suggested that cyclic segregation is a function of temperature gradients within the AC mix that could be addressed with attention to material handling, especially the use of transfer devices. Although rationalizations of the impacts on construction quality are generally accepted, quantification of these impacts has been elusive (Ellis 1993). An NCHRP synthesis report by Hughes (1996) presented a compilation of standard levels of quality measures for pavement construction reported by various agencies across the nation. Such information may be useful for benchmarking quality measures for any new closure strategy.

MOTORIST SAFETY

The topic of motorist safety typically comes to mind first when highway construction safety is considered. It is often the most prominent safety concern because traffic impacts are the most easily observed change at the site (other than the construction itself). The motorist encounters a change in traffic routes, patterns, and sometimes driving conditions. Traffic control measures are designed to guide the traffic to modified or alternative routes in as safe and efficient a manner as possible. Historical research shows that not only does this not always happen but that work zone safety continues to be a significant concern (Pal and Sinha 1996a, 1996b; Wang et al. 1996; Hall and Lorenz 1989; Pigman and Agent 1990; Paulsen et al. 1978). No historical data are available on weekend closures, so the safety of available alternative routes would need to be evaluated on a case by case basis. Ultimately, for motorist safety the type and quality of traffic control and the choice of alternative routes should be compared for the two scenarios of weekend and nighttime paving.

CONSTRUCTION COSTS

The numerous variables in construction make direct cost comparisons between projects difficult to validate. Comparisons of daytime construction costs with costs from nighttime work, even on the same project, may be difficult because of the limited number of comparable job conditions and methods. Ellis and Kumar (1993) felt that construction costs of nighttime and daytime paving construction may be compared by looking at major work item (unit) costs rather than total project costs. By using this approach, the two investigators concluded that, in the state of Florida, total program costs for nighttime construction were lower than those for daytime construction, although there was no difference in unit costs. They further concluded that specific job conditions had a greater influence upon unit costs of items than did the type of shift. Because construction costs are a function of numerous contract variables and the unit costs may not reveal a distinction, production rate may be a more sound measure, which can in turn be linked to relative cost.

USER COSTS

As stated previously, the most significant user costs stem from increases in travel time caused by the reduction in roadway capacity and subsequent route diversion, as well as from potential impacts on businesses. User costs related to vehicle delays were shown by Price (1986) to be an order of magnitude lower for nighttime paving than for daytime paving. Because the natural variation in congestion makes direct measurement of user costs related to travel time virtually impossible, measurements or assessments may be accomplished through traffic flow analysis and business community and motorist surveys. While this indirect approach does not provide a dollar figure, it can provide valuable insight into user impacts related to the weekend closure.

LIGHTING

Surprisingly little research has been done on the subject of lighting for nighttime construction. Having determined lighting to be one of the most important elements of

nighttime construction, Ellis and Amos (1996) conducted a study aimed at developing work zone lighting standards. Parameters of illumination level and lighting configurations were examined, as was hazard glare-control. A successful demonstration project resulted in "only minor modifications to the contractor's equipment" at an additional cost of \$1,628 to the contractor for the lighting upgrade. Modifications consisted of additional lamps (with spares) for the paver and roller compactors and glare control shades for the portable light tower. Three illumination categories were established corresponding to increasing need for visual clarity.

SUMMARY

Because an important question of this study is whether the weekend closure strategy can provide a consistent quality product between nighttime and daytime shifts, the same factors that influence the differences between daytime and nighttime highway construction may be expected to influence the cost and productivity of the complete weekend closure. Relevant data from Hughes' synthesis report were used as a basis for comparison with the data collected from the I-405 project. The important quality parameters were surface smoothness, in-place density, gradation (including AC content), longitudinal joints, and cyclic segregation.

In the face of limited alternative high speed routes, as with the I-405 closure, documentation and analysis of crash rates should provide valuable decision making information. One might try to monitor the level of traffic accidents along the alternative routes. Such monitoring was beyond the scope of this report, but an examination of accident reports may prove valuable when such information is available.

Because a direct measurement of construction costs is not useful for comparison with other projects, production rates are recommended as an indirect measure of relative costs between projects. This approach is reasonable because the central task of overlay construction is the laydown operation; however, total program costs are still an important consideration when closure strategies are chosen.

Rather than attempting to directly measure user costs, the assessment of user impacts may be a more meaningful approach. Such an approach requires an analysis of traffic response to the weekend closure, as well as the collection of motorist and business feedback.

Proper lighting is a major factor in the successful execution of nighttime construction. It follows that it would play significantly in the level of consistency achieved between the nighttime and daytime shifts of the weekend closure. Lighting levels and configurations are beyond the scope of this study, but observations of light level effects on such highly visible features as longitudinal joints may be readily noted.

CHAPTER 3 COMPARISON OF PRODUCTION RATES

Initial projections for paving production were 20,932 tons (18,985 metric tons) for the southbound direction and 22,013 (19,966 metric tons) for the northbound direction (*SR405 Mainline Overlay Report* in Appendix E). The actual total tonnage for the two weekends was 39,412 tons (35,747 metric tons)—20,393 tons (18,496 metric tons) on the southbound section and 19,019 tons (17,250 metric tons) on the northbound section. These totals included the mainline, shoulders, and ramps. The following discussion focuses on mainline production rate comparisons between the weekend closure project and a comparable nighttime closure project.

Cost comparisons between paving projects are difficult to validate because of the numerous variables that create dissimilarities between projects. However, production rates are an important factor in assessing the relative value for the dollar between paving projects. Historically, researchers have assumed that paving production rates during night closures should exceed those that can be achieved during daylight hours (Price 1986). Ellis and Kumar (1993), however, determined no statistical difference between night and day production rates, assuming a 95 percent confidence level. While production was not monitored on the I-405 project with the idea of doing a statistical comparison, it seemed beneficial to note how the I-405 paving compared to overlay projects of similar size under nighttime closure conditions.

COMPARISON WITH I-5 NIGHTTIME PRODUCTION RATES

Production quantities from I-405 are tabulated in Table 3-1, and production rates are compared to rates from project C4250 on I-5 from the Nisqually River to the Gravelly Lake Interchange in Table 3-2. The I-5 project was a nighttime project that was comparable in paving quantity to the I-405 project. The total tonnage for the I-5 project was 37,888.2 tons (34,364.6 metric tons), with 22,338.7 tons (20,261.2 metric tons) in the northbound

direction and 15,549.5 tons (14,103.4 metric tons) in the southbound direction. The large difference in paving quantities between the two directions resulted from longer project limits in the northbound direction. The northbound overlay was constructed during 14 nights in 1993 and three nights in 1994. The southbound overlay was constructed during 11 nights) in 1994. The northbound overlay constructed during 1993 was characterized by numerous instances of cyclic segregation. During the second year a mass transfer device (remixer) was used to complete the northbound lanes and to construct all of the southbound lanes. The strategy was successful in eliminating the cyclic segregation problem.

Paving production totals were estimated for the number of hours of paving operations for each shift. Table 3-1 lists the number of mainline paving hours for each shift and the total amount of ACC mix placed in that time for the I-405 project. I-405 data were extracted from the truck tickets. The I-405 production was divided by the 12-hr shifts used by the contractor minus the non-paving time at the beginning and end of each shift. Comparisons between IDRs and the truck ticket information for delivery time and station made reasonable shift production estimates feasible. Data for the I-5 project were supplied by the Midland Office of WSDOT.

Table 3-2 shows how the range of production rates achieved during the I-405 weekend closure compared to those of the I-5 nighttime-only paving. On the surface, the effect of the full closure condition seems to yield greater paving quantities. Note that the production for the Saturday night shift for the I-405 southbound paving (see Table 3-1) was uncharacteristically low. This may be explained by considerable worker fatigue, as noted on the IDRs, and also by an interruption in the work when specified course thickness was exceeded. A slightly less dramatic slowdown is noted for the northbound Saturday night paving, but no explanations were indicated in the IDRs. It appears that average paving rates of about 350 tons per hour (317 metric tons per hour) or more may be achieved with the full weekend closure strategy when the asphalt plant is in close proximity to the construction site and traffic-free access is ensured.

Table 3-1. Production by Shift from I-405 Project

Shift	Southbound Paving Production		Northbound Paving Production	
	Time Length for Mainline Paving Work (hrs)	Production [tons (metric tons)]	Time Length for Mainline Paving Work (hrs)	Production [tons (metric tons)]
Friday Night	10.5	3716.5 (3370.9)	11.25	4105.45 (3723.6)
Saturday Day	12	4955.85 (4495.0)	10.5	4181.65 (3792.8)
Saturday Night	11.5	3185.58 (2889.3)	11	3498.35 (3173.0)
Sunday Day	2.5	849.45 (770.4)	0.5	167.1 (151.5)

Table 3-2. Production Rates for I-405 in Comparison with Nighttime Project on I-5

Project	Transfer Method	Average Shift Duration (hrs)	Maximum Production Rate [tons/hr (metric tons/hr)]	Minimum Production Rate [tons/hr (metric tons/hr)]	Average Production Rate [tons/hr (metric tons/hr)]
I-5 Northbound 1993	Conventional	6.4	280(254)	135(122)	220(200)
I-5 Northbound 1994	Mass transfer	7.1	331(300)	288(261)	313(284)
I-5 Southbound 1994	Mass transfer	6.0	323(293)	149(135)	267(242)
I-405 Southbound 1997	Pickup	9.1	413(375)	277(251)	346(314)
I-405 Northbound 1997	Pickup	10.9	398(361)	318(288)	354(320)

By comparison, it may be more appropriately stated that the results indicated that the continuous, unobstructed paving operation resulted in an approximate 21 percent increase in production rates over paving executed without the same protective conditions.

TRUCK PRODUCTION RATES

Truck productivity serves as an additional basis for comparison between the two projects and further confirms the value of unobstructed material delivery, as shown in Table 3-3. The number of tons per hour per truck for each shift was calculated from the shift production and the average number of trucks hauling hot mix for that shift. All shifts with either a total production of less than 300 tons (272 metric tons) or a duration of less than 4 hours were deleted from the comparison to provide a more reasonable estimate of truck productivity. Note that available data for truck sizes was inadequate for calculating truck numbers on a size-equivalent basis. The values for average shift production from Table 3-2 are repeated in Table 3-3 to elucidate the comparison.

Table 3-3. Truck Productivity for I-405 in Comparison with I-5 Nighttime Project

Project	Transfer Method	Average Production Rate [tons/hr (metric tons/hr)]	Maximum Truck Productivity [tons/hr (metric tons/hr)]	Minimum Truck Productivity [tons/hr (metric tons/hr)]	Average Truck Productivity [tons/hr (metric tons/hr)]
I-5 Northbound 1993	Conventional	220(200)	26(23.6)	14(12.7)	19.4(17.6)
I-5 Northbound 1994	Mass transfer	313(284)	30(27.2)	21(19)	26(23.6)
I-5 Southbound 1994	Mass transfer	267(242)	22(19.9)	11(10)	19.6(17.7)
I-405 Southbound 1997	Pickup	346(314)	63.5(57.6)	39.6(36)	51.2(46.4)
I-405 Northbound 1997	Pickup	354(320)	60.8(55.1)	45.4(41.2)	54.4(49.3)

Examination of average truck productivity reveals two interesting points. First, the addition of the mass transfer device did not have any effect on truck resource utilization for the I-5 project, despite an apparent increase in production rates. The second point revealed by the data is that the paving technique for the I-405 project resulted in essentially 2 times the truck productivity achieved on the I-5 project. These higher truck productivities most likely resulted from the close proximity of the mobile asphalt plant and the protected access the trucks had to the work site. This insight underscores the benefit derived from the establishment of secure and uninterrupted site access for the hot mix delivery trucks.

CHAPTER 4 QUALITY CHARACTERISTICS OF THE OVERLAY

The evaluation of the quality of the AC overlay included both quantitative and qualitative assessments. Surface smoothness, in-place densities, aggregate gradation, and asphalt cement content were quantitatively assessed. Qualitative assessments encompassed the condition of the longitudinal joints, the presence of cyclic segregation, and other factors. All evaluation was focused on the mainline paving. The evaluation addressed two broad questions: (1) whether differences existed between nighttime and daytime paving quality and (2) whether the overall characterization of the project compared well to other paving jobs, especially nighttime paving. Results of the analysis between night and day cycles are presented and discussed below. Where historical data were obtained, they are compared to this project.

SURFACE SMOOTHNESS

Smoothness was measured with a California profilograph, model CS 8200 Version 1.0, manufactured by James Cox and Sons, Inc. This particular model uses a first order low pass filter for smoothing the data. The use of the first order filter has been noted to produce readings that are less sensitive than earlier manual approaches and higher order filters (Huft 1992; Scofield et al. 1992). For the purposes of this study, consistency in the smoothness of the riding surface was of primary importance; therefore, the sensitivity of the measurement technique was of less significance. Note that although the contractor was aware that smoothness would be measured and that a continuous smooth ride was desirable, smoothness measurements were not a requirement of the contract.

Tables 4-1 and 4-2 summarize the smoothness measurements that were taken during the two weekend closures. For each lane, the PRI represents a continuous

segment of the lane. Measurements were first taken from the prelevel surface to isolate the improvement of the overlay course.

Table 4-1. Southbound Profilograph Summary

Lane	Wheel Path	Prelevel PRI [in/mi(mm/km)]	Overlay PRI [in/mi(mm/km)]	Improvement in PRI [in/mi(mm/km)]	When Paved
1	Inside	4.3(68)	3.4(47)	+0.9(14)	N
2	Outside	6.7(106)	1.8(28)	+4.9(77)	D
2	Inside	1.8(28)	1.7(27)	+0.1(2)	D
2	Outside	5.0(79)	1.4(22)	+3.6(57)	D
1	Inside	4.2(66)	5.0(79)	-0.8(13)	D

Table 4-2. Northbound Profilograph Summary

Lane	Wheel Path	Prelevel PR [in/mi(mm/km)]	Overlay PRI [in/mi(mm/km)]	Improvement in PRI [in/mi(mm/km)]	When Paved
1	Inside	11.5(182)	1.3(20)	+10.2(161)	Night
3	Outside	7.8(123)	2.4(38)	+5.4(85)	Day
2	Inside	6.2(98)	1.3(20)	+4.9(77)	Day

The profilograph measurements can be put into perspective by considering the smoothness specification for AC pavements that is currently utilized in the Southwest Region. The supplement specification for Section 5-04.3(13) of the standard specification stipulates that the contractor should employ methods that produce a riding surface that has a profile index of 5 in. per miles (80 mm per kilometer), as measured with a California-type computerized profilograph. Reference to this specification indicates that the contractor for the I-405 project produced smoothness appropriate to a high quality

pavement. Only the PRI for the last section listed for the southbound direction came close to exceeding 5 in./mi (80 mm/km). Investigation did not reveal why the PRI for this section was so much rougher than that of the other sections.

Statistical analysis of the PRIs revealed no differences between nighttime and daytime paving shifts, nor between southbound and northbound lanes. Note, however, that the number of samples that were obtainable on this project was small and included many more daytime shifts than nighttime shifts. A larger database would be desirable for drawing firm, statistically supported conclusions.

IN-PLACE DENSITIES

The results obtained from measurements of in-place density were compared for differences between daytime and nighttime paving and between weekend closures. Comparisons were also made with historical data, and correlations with pay factors were examined. The first two analyses are discussed below, while the last is discussed in Chapter 5.

Overview of Density Results

Mat density measurements were taken in sequence with the paving operations along the length of both the southbound and northbound lanes with a calibrated nuclear densometer. In accordance with WSDOT Test Method No. 716, five measurements were taken from sublots of each 400-ton lot and an average density was calculated for each lot. Average Rice density percentages were found to be normally distributed (see Figure 4-1). Average densities over the entire worksite ranged from 91.46 to 94.98 percent, with an average density of 93.14 percent and a standard deviation of 0.72 percent. The range for all individual sublots was from 90.1 to 96.4 percent (see Figure 4-2).

Statistical tests indicated that there were no significant differences in the average (mean) densities between the two weekends (directions). The mean density in the northbound direction was 93.13 percent, and that in the southbound direction was 93.14 percent, virtually the same. However, the statistical variation about the mean densities

was significantly different. As seen in Figure 4-2, the range of densities for the northbound direction (91.46 to 94.98 percent) was somewhat greater than the range for the southbound direction (92.0 to 94.28 percent).

Figure 4-3 shows a plot of densities measured as paving operations progressed through each respective weekend. The time is expressed in terms of the day and night intervals, which coincided with shift changes occurring at 8:00 AM and 8:00 PM each day of the closures. F-tests for statistical differences in variation revealed that the difference in variation between the two weekends of paving could be isolated to the "First Day" of paving. That is, the variation in average in-place densities was shown to be different between the Saturday daytime shifts. No other source of variation difference was statistically supported.

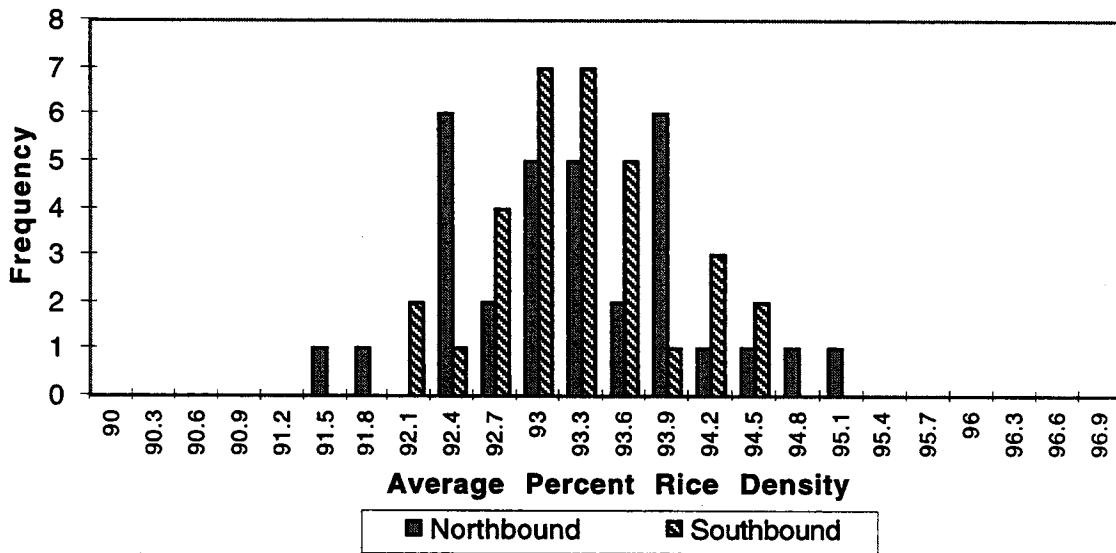


Figure 4-1. Frequency Histogram of Average Rice Density Percentages for Each Direction

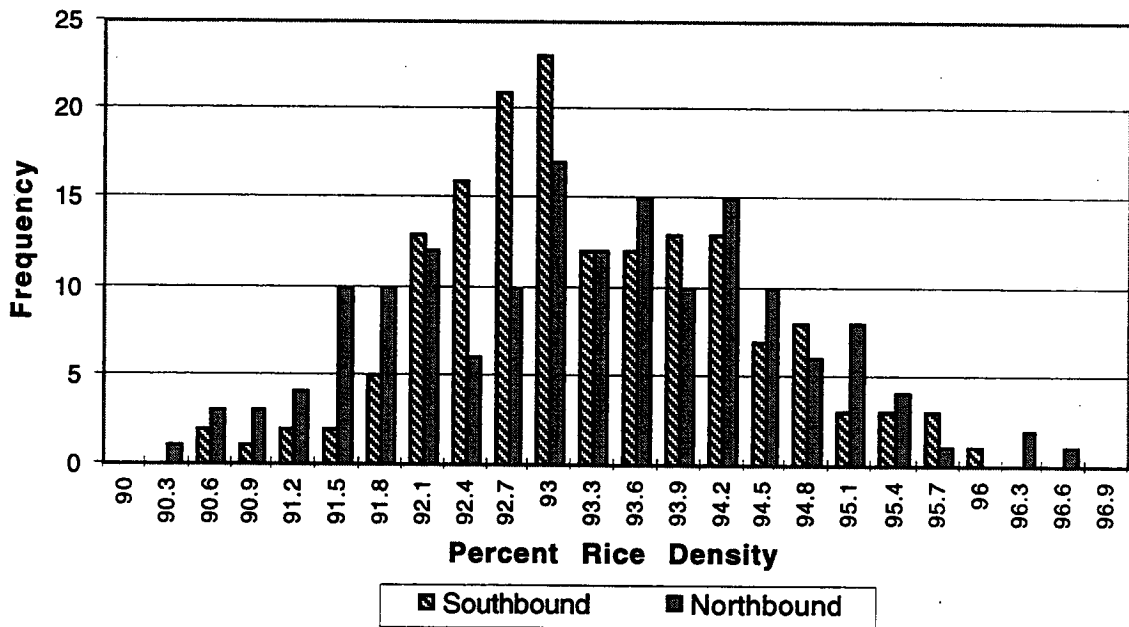


Figure 4-2. Frequency Distribution of Rice Density Percentage for All Mainline Paving

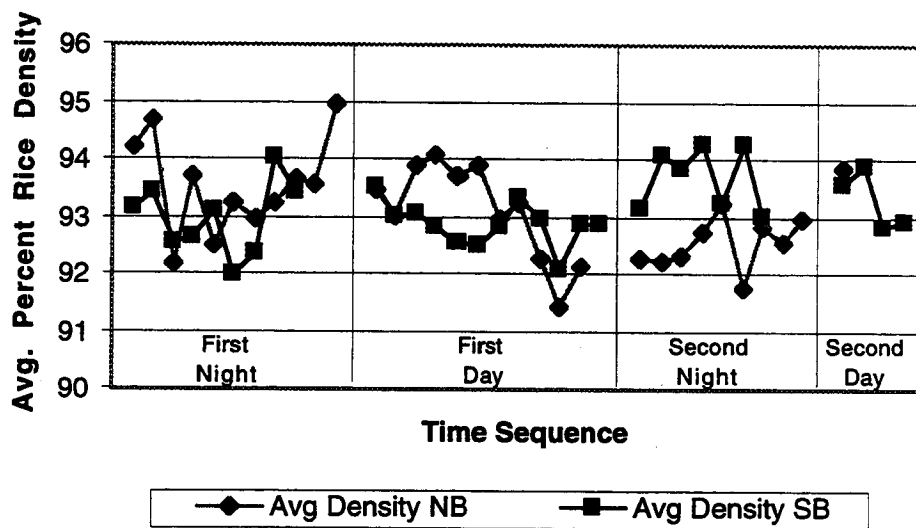


Figure 4-3. Average Rice Density Throughout Paving Operations

A trend line drawn through the data from the southbound direction indicates a slight general increase in average densities as paving operations progressed (refer to Figure 4-4a). This trend implies that paving operations became more effective as the first weekend proceeded. On the other hand, a slight decrease in average densities was apparent for the northbound direction (refer to Figure 4-4b), indicating a loss of effectiveness. Such an apparent trend may be attributed to growing human fatigue after the first weekend or to a faster paving rate and thus more pressure on the compaction operation to keep pace with paving. (Although four compactors were devoted to the second weekend of paving, two of the four roller compactors broke down.) However, explanations for the apparent trends cannot be guaranteed because of limited data and questionable assumptions. For example, the validity of connecting the shifts in sequence is questionable.

No significant differences in pavement densities were found between lots paved in the daytime and those paved in the nighttime. This was true for both northbound and southbound directions, individually and as a whole.

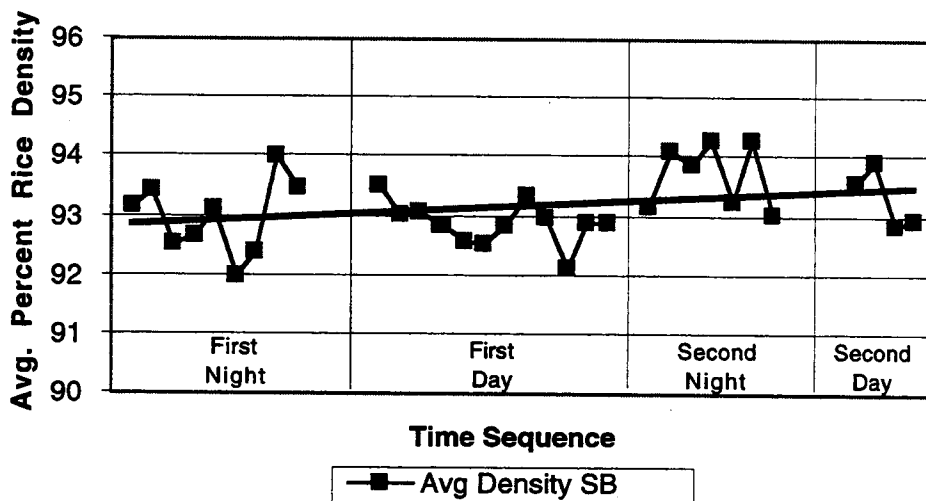


Figure 4-4a. Trend for Southbound Average Rice Densities

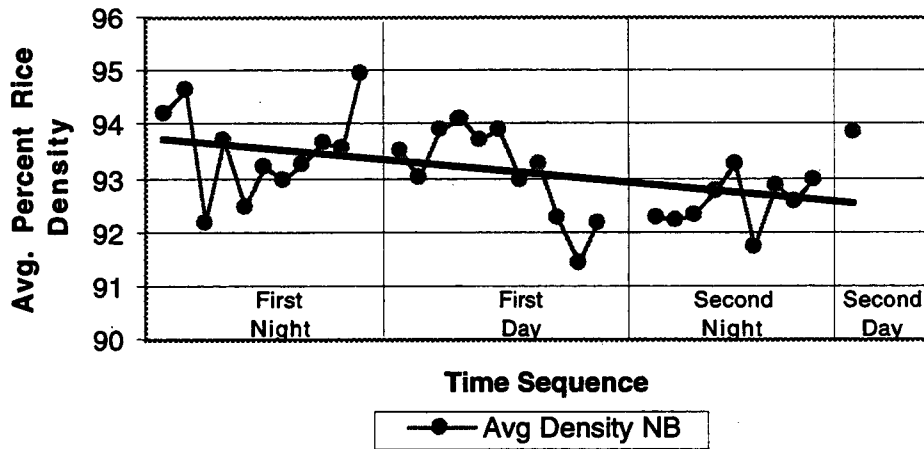


Figure 4-4b. Trend for Northbound Average Rice Densities

Densities in Perspective

Comparison with historical data helps to put the average Rice densities into perspective. When Markey et al. (1994) studied the initial impact of the WSDOT quality assurance (QA) specification, they included three QA projects. In Table 4-3, the statistical parameters for density from those jobs are compared to those from the mainline paving for the I-405 project. The I-405 project compares quite well. Its mean average density is exceeded by only one of the other three projects (3522), and all but one of the other projects (3587) have greater variability.

Table 4-3. Comparison of I-405 Average Rice Density Percentage Parameters to Early QA Projects from Markey et al. (1994)

Job	# Lots	Mean	Max.	Min.	Range	Standard Deviation	Variance
I-405	64	93.14	94.98	91.46	3.52	0.716	0.513
3522	46	93.34	95.52	91.24	4.28	1.035	1.070
3587	24	92.87	94.82	91.66	3.16	0.694	0.482
3636	131	92.49	94.42	88.64	5.78	0.867	0.756

Further examination of construction quality included comparison of the air voids in the compacted ACP with values quoted in the literature. Notwithstanding differences between measurement methods, the I-405 project variability was found to be distinctly less than those reported from the several sources included in Table 4-4.

Table 4-4. Comparison with Reported Standard Deviation of Asphalt Concrete Air Voids for Roadway Compacted Mixtures (adapted from Hughes 1996)

Source	Year	Method	AV%
I-405	1997	Nuclear	0.73
California	1995	Cores	1.9
New Jersey	1995	Cores	1.5
Ontario	1995	Cores	1.6
Colorado	1993	Cores	1.0
Washington	1993	Nuclear	0.9
Virginia	1984	Cores	1.3

The effect that air voids in the compacted mix have upon pavement quality is worth noting. Linden et al. (1989) conducted a study wherein they confirmed a basic rule of thumb that for every 1 percent above 7 percent of air voids in the compacted roadway mix, pavement life decreases by 10 percent. The average percentage of air voids for the project was 6.8, which suggests a satisfactory period of service from the overlay.

GRADATION

Areas of quality performance that were explicitly specified in addition to density were the aggregates gradation and the asphalt cement content. Table 4-5 shows how favorably the mix of aggregate and asphalt cement fractions for this job compared to the job mix formula. For each aggregate size and for the asphalt cement content, job gradation fell well within the specified range limits. Even two standard deviations (95 percent of cases) from the job average would still have fallen within specified range limits in all cases except the 1/4-inch (6.33 mm) size.

Table 4-5. Gradation Summary for I-405 Project

Item	JMF%	Job Average %	Standard Deviation %	One Standard Deviation %	Specified Range Limits %
3/4 (19 mm)	100.00	100.00	0.00	100.00	100.0
1/2 (12.5)	98.00	98.00	0.83	97.17 - 98.83	90.0 - 100.0
3/8 (9.5 mm)	86.00	86.71	1.64	85.07 - 88.35	75.0 - 90.0
1/4 (6.33 mm)	69.00	67.19	2.19	65.00 - 69.38	63.0 - 75.0
No. 10 (2.00 mm)	35.00	33.00	1.43	31.57 - 34.43	30.0 - 40.0
No. 40 (425 μm)	14.00	13.69	0.92	12.77 - 14.61	11.0 - 18.0
No. 200 (75 μm)	5.00	4.87	0.41	4.46 - 5.28	3.0 - 7.0
% AC	5.30	5.18	0.18	5.00 - 5.36	4.8 - 5.8

Table 4-6 helps to put the gradation variability into perspective. Aggregate gradation variability data published by Hughes (1996) is shown here for direct comparison to the I-405 gradation results. Note that the variabilities from the I-405 project were consistently less than those reported from the four most recent sources presented from Hughes' synthesis study. The Washington State data from 1993 were obtained from a project that was executed under the then newly developed statistical quality assurance (SQA) specification.

Table 4-6. Comparison with Typical Asphalt Concrete Aggregate Gradation Variability from Extraction Tests (adapted from Hughes 1996)

Size	Percent Passing Standard Deviation				
	I-405	Washington 1993	Arkansas* 1993	Pennsylvania 1982	Virginia 1968
3/4 or 1/2 (19 mm or 12.5 mm)	0.83	1.6	1.7	2.3	-
3/8 (9.5 mm)	1.64	2.5	2.6	4.4	1.9
1/4" or #4 (6.33 mm or 4.75 mm)	2.19	3.0	2.8	3.4	3.3
#8 or #10 (2.3 mm or 2.00 mm)	1.43	2.4	1.7	2.5	3.2
#40 or #50 (425 μ m or 300 μ m)	0.92	1.6	1.3	1.5	1.6
#200 (75 μ m)	0.41	0.5	0.6	1.0	0.9
*Data from questionnaire responses.					

The asphalt cement content variability can also be compared with some typical standard deviations. Table 4-7 shows how the variability from the I-405 project compares to data previously published from several sources and condensed by Hughes (1996). Only data from the last ten years are presented. It is important to acknowledge that variation between measurement procedures may exist. However, the I-405 project compares favorably with other data if the measurement procedure is disregarded.

Table 4-7. Comparison with Typical Asphalt Cement Content Variability (adapted from Hughes 1996)

Source	Year	Test	Std Dev, %
I-405	1997	Nuclear	0.18
Arkansas*	1994	Extraction	0.21
Virginia	1994	Extraction	0.18
Virginia	1994	Nuclear	0.21
NCAT	1994	Nuclear	0.19
NCAT	1994	Centrifuge	0.44
NCAT	1994	Ignition	0.30
Washington	1993	Extraction	0.24
Colorado	1993	Extraction	0.15
Kansas	1988	Nuclear	0.27
Virginia	1988	Extraction	0.19
*data from questionnaire responses.			

LONGITUDINAL JOINTS

Longitudinal joints were expected to be of good quality since the unfinished mat had not been exposed to normal traffic. However, there were noted difficulties in matching the longitudinal joints. This problem was indicated by both waviness in the joint line and deep cracks or tears near and parallel to the joint. Several instances of poor longitudinal joints were noted during both weekends. Because of concern over the quality of the longitudinal joints during the first weekend of paving (southbound), instructions were given to apply a fog seal to the joints. The joints still appeared wavy in the northbound direction, but no sealing was deemed necessary.

Without direct observation, causes for flaws in the longitudinal joints are speculative. However, consultation with the contractor's supervisors and reference to the literature (*Hot Mix ...; Asphalt Construction Handbook 1992*) revealed three potential explanations for the problems with the longitudinal joints. The first possibility is that the wide drums of the large rollers may have extended too far beyond the free edge of the

mat, thus creating an improper edge on the cold mat side of the joint. The second possibility is excessive rolling of the joint, especially during the cooler nighttime hours when the AC mat temperature may have been too low. A final possibility is that too much of the width of the vibratory roller extended onto the cold mat.

Finally, note that flaws in the longitudinal joints were more extensive because nighttime visibility inhibited recognition of the problem, a case for better lighting. In addition, the relatively high speed of the paving operation often meant that the compaction operations were too far behind (confirmed by IDR comments), thus giving the AC mat more time to cool before compaction.

CYCLIC SEGREGATION

Experiences with other projects raised the issue of cyclic segregation on the I-405 project. It was determined, however, that the continuous paving with a pickup device, combined with no expectation of prolonged nighttime cooling of the HMA in the truck, would preclude any problem with cyclic segregation. Visual inspection of the pavement by both the investigators and WSDOT personnel revealed no evidence of cyclic segregation.

OTHER SURFACE DEFECTS

There were numerous tears in the ACP mat throughout the outside lane (#1) in the northbound direction. The contractor's supervisors thought the tack coat might have been inadequate, perhaps through removal by heavy truck traffic. The resulting lack of adhesion between the prelevel surface and the overlay may have allowed the mat, which was unrestrained on the shoulder side, to slide and therefore to tear easily during the rolling operations. This problem, along with the assessment of the longitudinal joints, indicates a need to pay closer attention to the interaction between temperature, the speed of paving, and the paving plan lane sequence.

SUMMARY

The overall level of quality in the overlay was good with respect to smoothness, density, gradation, and cyclic segregation. Comparisons with historical data from Washington State, as well as a few other states, were quite favorable, indicating that the quality of the I-405 project with respect to these parameters was decidedly better than average. Not only were commendable mean values achieved, but variabilities were notably minimized.

For the measured quality parameters, no statistically substantiated differences appeared between night and day paving. However, more samples between night and day shifts would be desirable to draw a solid conclusion. Data from future weekend closures should be combined with the data from the I-405 project to allow a more comprehensive evaluation of the quality achieved with the closure method.

Roller operations seem to be the major area of difficulty during weekend closures. This was evident in problems with the longitudinal joints and in surface tears in one lane of the northbound direction. Several IDR notations also referred to this problem. The high speed of the laydown operation demands substantial effort by the roller operators to keep up with the paver. An adequate number of rollers must be available. Based upon the experience of the first weekend, the contractor did begin the second weekend with four rollers, but did not replace two of the four when they broke down. Close attention to this vital construction operation is recommended for future weekend closure projects.

CHAPTER 5 ANALYSIS OF PAY FACTORS

An analysis of the pay factors that were earned by the contractor for the I-405 project was conducted as an outgrowth of consultation with WSDOT personnel after the in-place density and gradation records had been examined. The objective of the analysis was to examine the trends revealed by a comparison of the calculated pay factors with their corresponding parameter measures, not to perform an in-depth examination of WSDOT's SQA procedures. This chapter discusses the results obtained from examining pay factors for uncompacted AC mix and in-place AC pavement. The reader is referred to WA-RD 326.1 (Markey et al. 1994) for an explanation and sample calculation of pay factors, as outlined in the WSDOT statistical quality assurance specifications.

IN-PLACE DENSITY

Figures 5-1 and 5-2 show plots of the pay factors versus the average percentage of Rice densities for the southbound and northbound paving, respectively. Each plot indicates that, with few exceptions, average densities at or above 93 percent typically resulted in maximum pay factors of 1.05. The practical target for the contractor is 92 percent of Rice density, while the statistically specified minimum as noted in Section 5-04.3(10)B of the *1994 Standard Specification*, is 91 percent. None of the average densities were below 91 percent. Points of interest are those that fell between 92 percent and 93 percent.

In both figures 5-1 and 5-2, average or lot densities between 92 percent and 93 percent yielded a scatter of corresponding pay factors, including maximum values. The northbound direction had the widest range. Even at and slightly above 93 percent, a few pay factors were calculated at less than maximum for the southbound direction. Figures 5-3 and 5-4 convey a better perspective of the relation between these densities and the calculated pay factors. Each column, measured from the left vertical axis (ordinate), represents the average percentage Rice density for the sequence of lots that were measured.

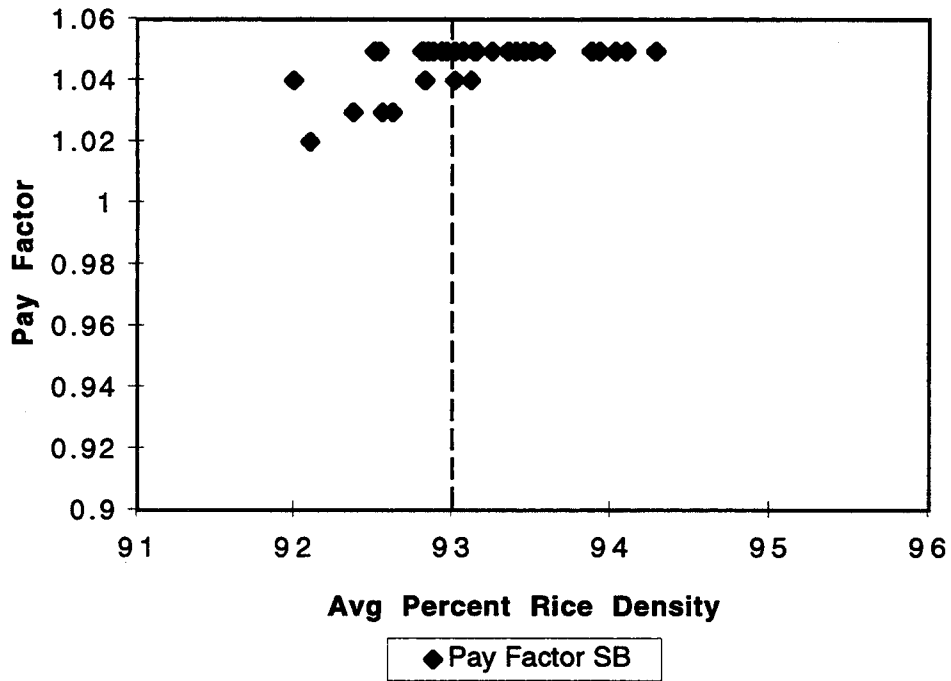


Figure 5-1. Pay Factors versus Average Densities for Southbound Paving

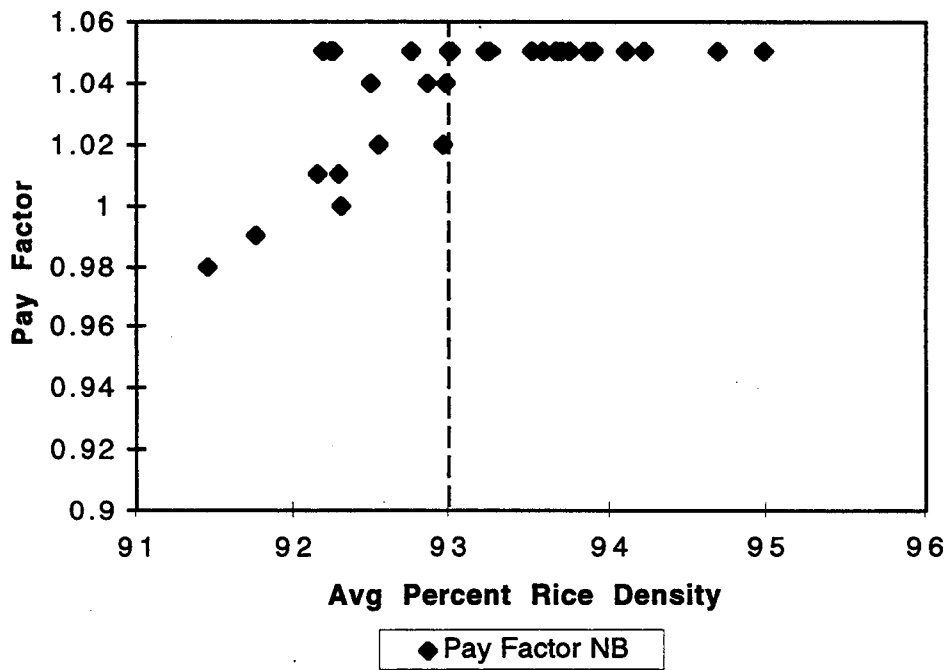


Figure 5-2. Pay Factors versus Average Densities for Northbound Paving

The triangles represent the corresponding pay factors, which are scaled on the right ordinate. The southbound sequence of pay factors conveys the picture of a relatively steady performance, which is consistent with the generally lower variability noted for that weekend closure. The northbound sequence, however, which was visually (although not statistically) characterized by greater variability in density measurements, only shows a corresponding variability in pay factors from Saturday night (August 23) through Sunday morning (August 24). Close examination of both figures reveals several instances of lower average densities associated with the maximum pay factors, while some slightly higher average densities are associated with lower pay factors. It is evident from these charts that the variation in pay factors did not consistently follow the variation in average measured densities.

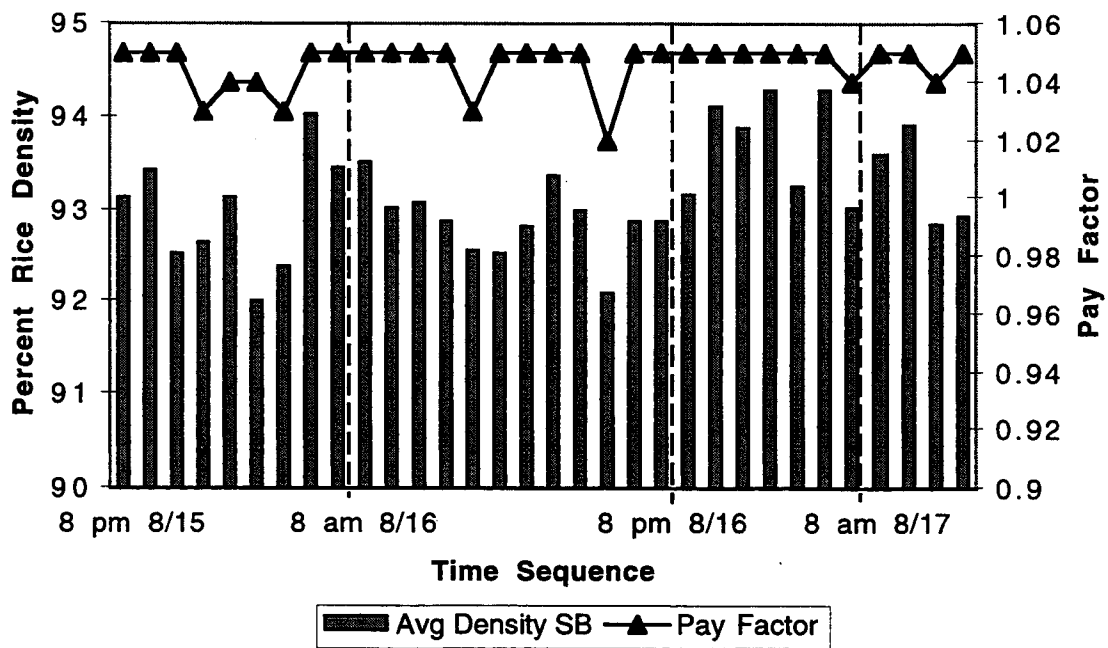


Figure 5-3. Plot of Pay Factors and Average Densities for Southbound Paving

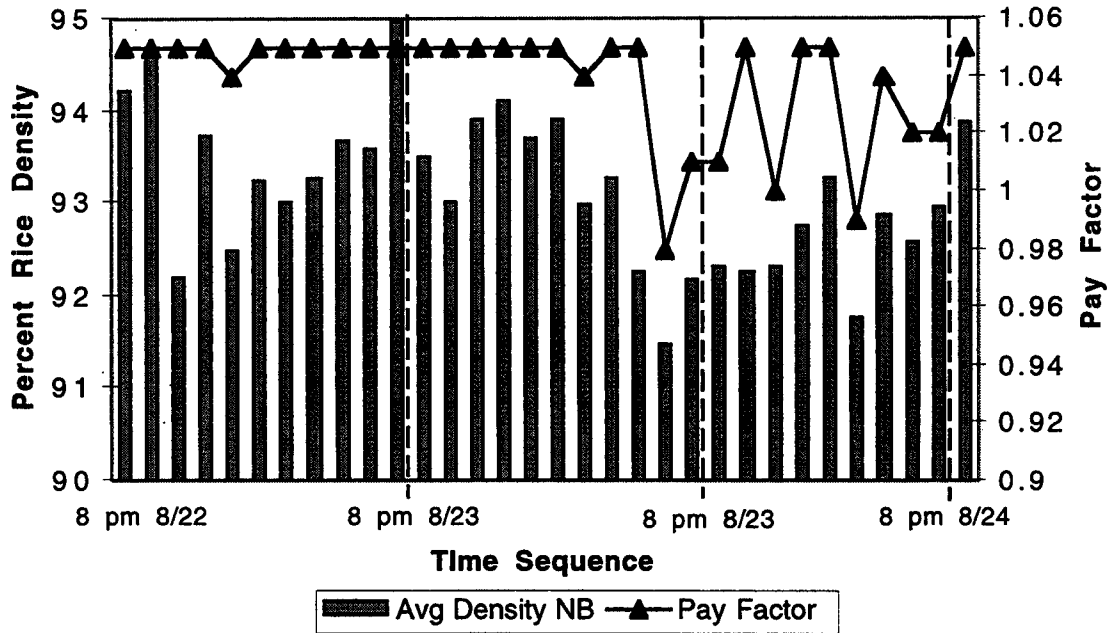


Figure 5-4. Plot of Pay Factors and Average Densities for Northbound Paving

The explanation for the apparent inconsistency between lot density patterns and pay factor patterns is shown in figures 5-5 and 5-6, which display the same pay factors as they correspond to the ranges of subplot in-place densities that are represented by each average density. What is noted upon comparison with the two preceding figures is that lower densities that yielded maximum pay factors were calculated from smaller ranges of subplot densities. A specific example of this occurrence is the sixth lot taken from the Saturday (8/16) daytime shift for the southbound paving. Series of lots that corresponded to maximum pay factors were characterized by notably smaller ranges of subplot densities for both weekends of paving. Conversely, the last night (8/23) of paving for the northbound direction, which was characterized by a considerably smaller percentage of maximum value pay factors, was characterized by wider ranges in subplot densities. The recorded values

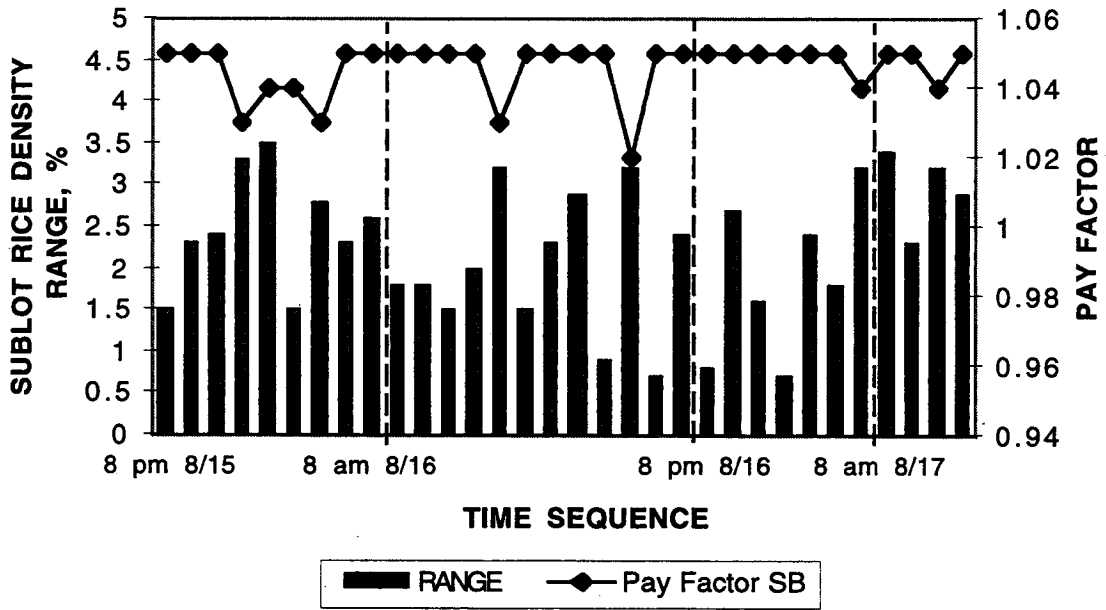


Figure 5-5. Pay Factors and Range of Rice Density Percentages for Southbound Direction

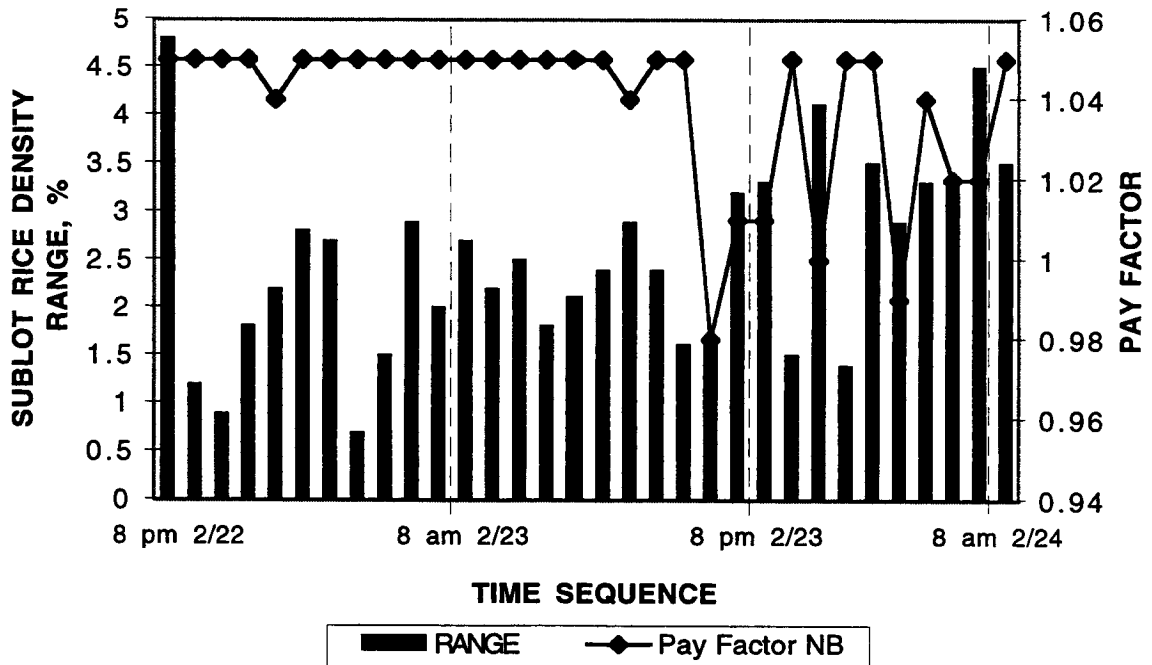


Figure 5-6. Pay Factors and Range of Rice Density Percentages for Northbound Direction

also revealed that some subplot values were lower than 91 percent of Rice density, which also contributed to less than maximum pay factors for the corresponding lots.

In summary, the contractor was successful in achieving maximum pay factors for in-place densities through most of the project. Instances in which the contractor was not successful in spite of reasonably high lot densities were explained by either below-minimum subplot density measurements or wide ranges of subplot densities. Therefore, the pay factors clearly tempered the reward that would accompany higher average densities with a penalty for lower individual subplot densities and for inconsistency.

GRADATION PAY FACTORS

Comparison of pay factors with corresponding parameters is not as straightforward for aggregate gradation and asphalt cement content as it is for in-place densities. Pay factors for aggregate gradation and asphalt content for the I-405 project are listed in Table 5-1. Each pay factor represents 42 sublots of 800 tons each. The composite pay factor was 1.043. Each item pay factor is a function of specified range limits, the average percentage, and the standard deviation achieved for the specific item. Therefore, no significant insights may be derived from comparisons between pay factors and any measured parameters for aggregate gradation and asphalt content for any single project. It can only be stated that lower variabilities were rewarded with higher pay factors. Comparisons between projects with identical specified range limits would be of greater relevance, as they would reveal the impact of standard deviation variability.

Table 5-1. Pay Factors and Standard Deviations for AC Mix Items

Item	Pay Factor	Standard Deviation (%)
3/4 (19 mm)	1.05	0.00
1/2 (12.5)	1.05	0.83
3/8 (9.5 mm)	1.04	1.64
1/4 (6.33 mm)	1.04	2.19
No. 10 (2.00 mm)	1.04	1.43
No. 40 (425 μm)	1.05	0.92
No. 200 (75 μm)	1.05	0.41
% AC	1.04	0.18

CHAPTER 6

SURVEY RESULTS: PUBLIC FEEDBACK

A survey was conducted to ask travelers how their travel patterns had changed in response to the weekend closing of I-405. Questions related to the effectiveness of the information campaign and the travelers' overall impressions.

The sample of travelers was drawn from license plates of vehicles observed using the I-405 facility during the three weekends preceding construction. In all, 2170 Washington state license plate numbers were collected and matched with addresses through the Washington State Department of Licensing. After irrelevant data had been excluded, such as rental cars and out-of-state addresses, 1,940 surveys were mailed to vehicle owners in early September 1997. Of those, 378 valid surveys were returned (a response rate of 19.4 percent). Data were coded and analyzed with the LIMDEP statistical package (Greene, 1995).

DESCRIPTIVE STATISTICS

Table 6-1 has summary statistics for respondents' socioeconomic attributes. The average respondent was about 45 years old; about 57 percent were male; and almost 69 percent were married. The average household contained 2.77 members, with 1.53 working people and 2.28 vehicles.

Figure 6-1 shows the distribution of age; most respondents were between 31 and 60. Figures 6-2 and 6-3 show the distribution of income and education level of respondents. The income of more than half of the households was over \$50,000/year, and over 50 percent of respondents had a college and/or post graduate degree.

Table 6-1. Summary of Respondents' Socioeconomic Attributes

Gender	Male	213	(56.50%)
	Female	164	(43.50%)
Marital status	Married	259	(68.88%)
	Single	69	(18.35%)
	Separated	4	(1.06%)
	Divorced	34	(9.04%)
	Other	10	(2.66%)
	Average age		44.8
Average household size		2.77	
Average number of working people		1.53	
Average number of motor vehicles		2.28	

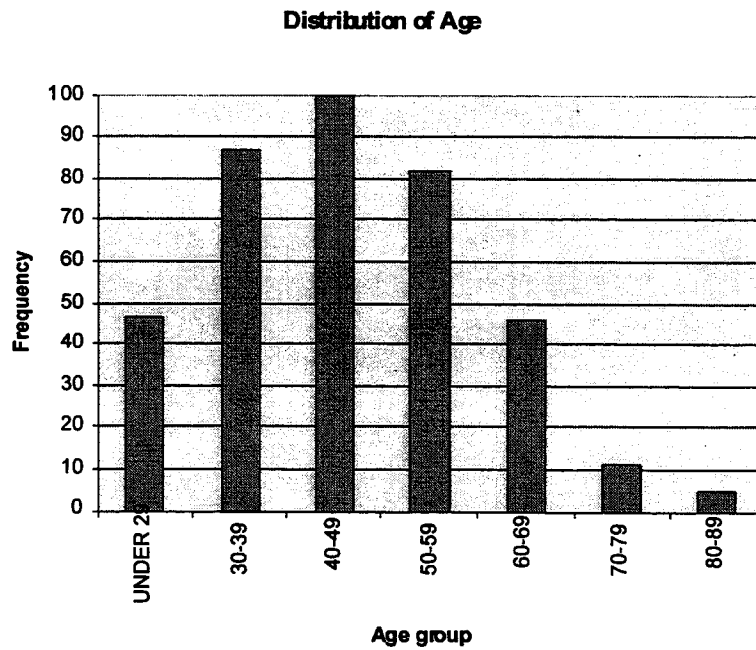


Figure 6-1. Distribution of Age

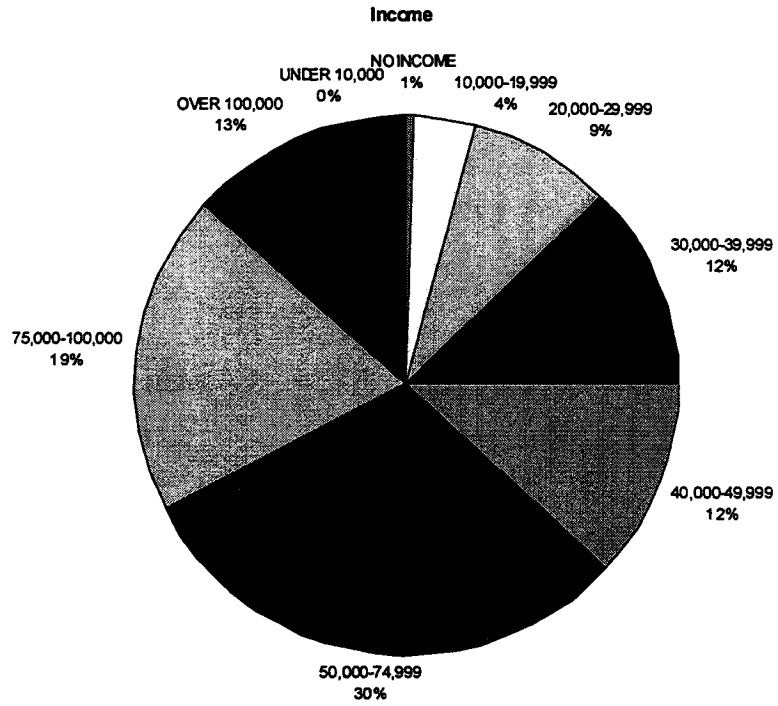


Figure 6-2. Income Distribution of Respondents

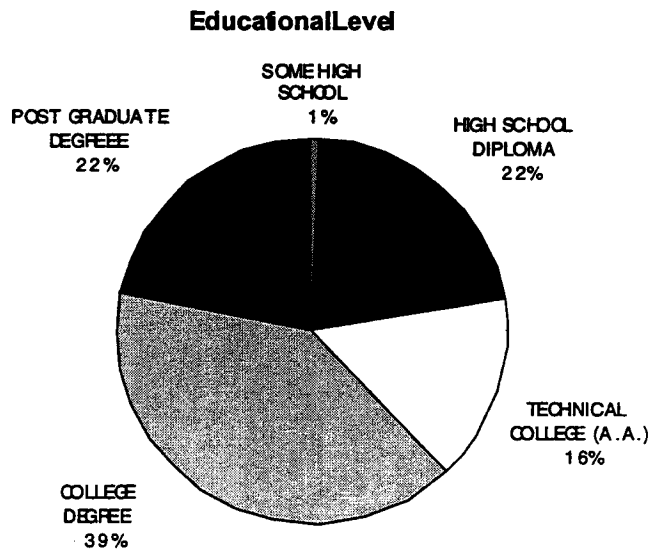


Figure 6-3. Educational Level of Respondents

Table 6-2 shows the respondents' traffic-related behavior during the closure. About 85 percent of respondents were in the Seattle area during the closure on either August 15th through 18th or August 22nd through 25th, and 18 respondents arranged a schedule to be out of the area because of the I-405 closure. About 53 percent said that the weekend closure of I-405 affected their travel plans in some way. About 70 percent of respondents changed their routes, 42 percent altered their departure time, 9 percent canceled their trips, 8 percent shopped at different places, and 6 percent spent less money. Ninety-three percent of respondents said that they knew of the weekend closures in advance. More detailed analysis is presented in subsequent sections.

In terms of trip types canceled because of the I-405 closure: 37 percent of visiting trips, 24 percent of shopping trips, 15 percent of business trips, 12 percent of recreation trips, and 12 percent of other types of trips were canceled. The distribution of alternative routes taken because of weekend closure showed that most respondents took I-5 (39 percent) and I-90 (27 percent) as alternative routes.

The distribution of the sources from which respondents gained information about the I-405 closures showed that 32 percent of respondents learned about the I-405 closures from radio, 28 percent from television, 26 percent from road signs, 6 percent from word of mouth, 4 percent from newspapers, and 4 percent from other sources. For comparison, the ways that people usually acquire traffic-related information in the Puget Sound region are 36 percent from radio, 26 percent from road variable message signs, 21 percent from television, 8 percent from newspapers, 5 percent from word of mouth, and the rest from other means.

Table 6-2. Summary of Respondents' Travel-Related Behaviors

Question	Yes	No
Were you in the Seattle Area during the weekends of either August 15-18 or August 22-25?	319 (84.62%)	58 (15.38%)
↳ If no, did you arrange your schedule to be out of the area because of the I-405 weekend closure?	18 (22.22%)	63 (77.78%)
Did the weekend closure of I-405 affect your travel plans in any way?	178 (53.45%)	155 (46.55%)
Did you use a trip route that you would not have normally taken because of the weekend closure of I-405?	179 (69.11%)	80 (30.89%)
Did you change the departure time of any of your trips because of the weekend closure of I-405?	109 (41.76%)	152 (58.24%)
Did you cancel a trip that you would have normally taken because of the weekend closure of I-405?	23 (8.78%)	239 (91.22%)
Did you spend less money shopping because of a weekend closure of I-405?	15 (5.68%)	249 (94.32%)
Did you shop at different places because of a weekend closure of I-405?	20 (7.58%)	244 (92.42%)
Were you aware of the I-405 closures before they happened on August 15-18 or August 22-25?	353 (93.39%)	25 (6.61%)

ESTIMATION RESULTS

An ordered probit model was appropriate to use because the data were ordinally ranked (i.e., disagree strongly, disagree, neutral, agree and agree strongly), as discussed earlier. The ordered probit model results of the opinions about each statement are presented in Appendix B with the resulting coefficients, t-statistics, and marginal effects.

Travel Impacts

Figure 6-4 shows the distribution of responses to the statement that the weekend I-405 closures had a major impact on their travel plans. About 70 percent of respondents said that they experienced no major impact on their travel plans. For comparison, in answer to a previous similar question, 54 percent of respondents said that the weekend closure of I-405 had affected their plans anyway.

The estimation results in appendix Table B-1 show that respondents younger than 30 were more likely to believe that the closure had had a major impact on their travel plans. This may be because younger people usually participate in more outdoor activities during the weekend than older people. Households with less than \$30,000 in income and respondents who were highly educated were less likely to agree with this statement. Seattle and Bellevue residents were less likely to believe that the I-405 closure had a major impact on their travel plans. This may be because they have easy access to alternative routes such as I-90 and I-5.

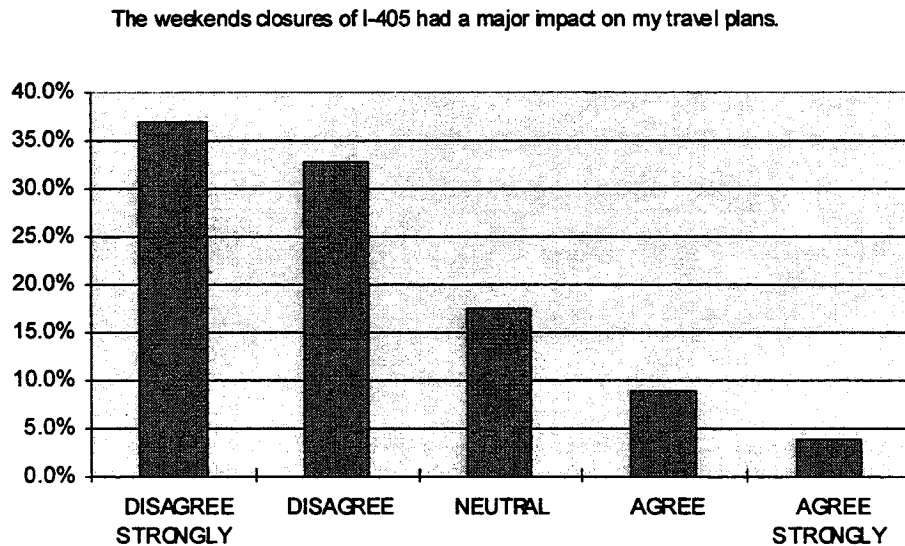


Figure 6-4. Responses to the Statement That the Weekend Closures of I-405 Had a Major Impact on Travel Plans

Information Dissemination

The state and the media were apparently successful at informing the public of the I-405 closures. About 88 percent agreed that the state and the media allowed most people to plan ahead. However, middle age respondents between 30 and 54 were less likely to believe that information about I-405 was properly disseminated by the state or media. (See appendix Table B-2.) As the number of working people in households increases, the likelihood that respondents would support this statement increases. Bellevue residents were more likely to agree with this statement than Seattle or Kirkland residents.

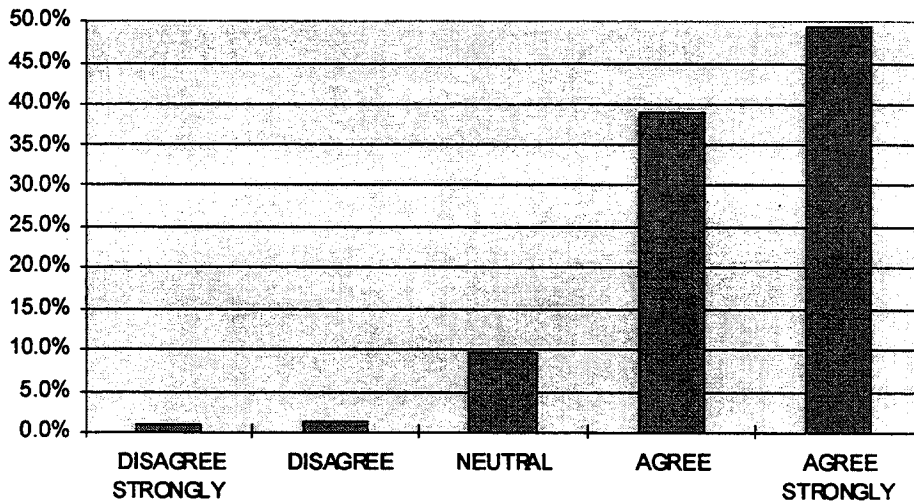


Figure 6-5. Responses to the Statement That the State and the Media Did a Good Job of Making the Public Aware of the I-405 Closures

Effectiveness of Plan

Given that transportation planning is a political process, public perception is as important as the program itself. The statement that closing highways completely for a weekend is better than closing a few lanes during the day for several days was overwhelmingly supported by 87 percent of respondents. The results in appendix Table

B-3 show travelers' opinions, depending on socioeconomic characteristics. Middle age respondents and Kirkland or Mercer island residents were more likely to disagree with this statement. People in higher-income households and respondents who were highly educated were more likely to believe that closing highways completely for a weekend is better than closing a few lanes during the days for several days. As the number of working people in a household increased, the likelihood that respondents would support this statement increased.

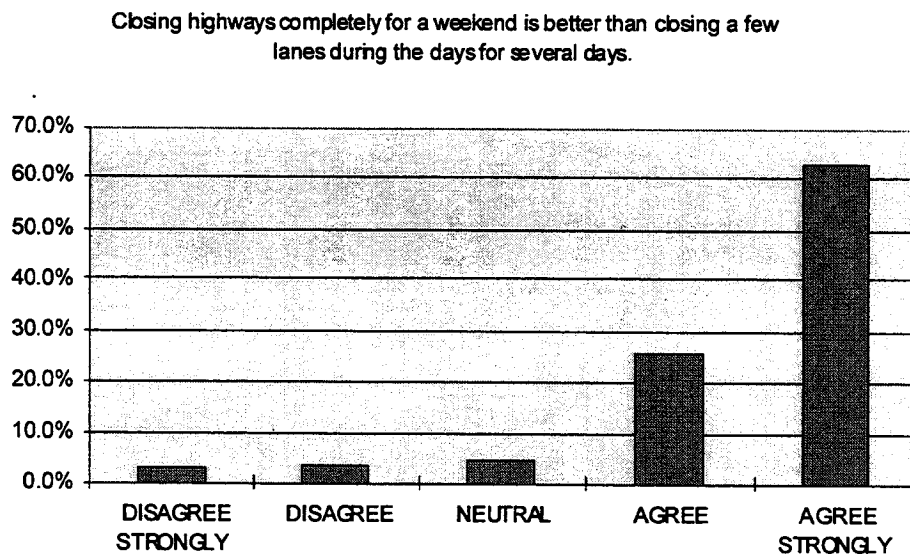


Figure 6-6. Responses to the Statement That Closing Highways Completely for a Weekend Is Better Than Closing a Few Lanes During the Day for Several Days

Business Impacts

For the statement that the weekend closures of I-405 had a significant, negative impact on area businesses, 47 percent of respondents disagree, 46 percent were neutral, and 7 percent agreed (Figure 6-7). Appendix Table B-4 presents the ordered probit estimation results. Middle age respondents were more likely to think that the closure had a significant, negative impact on area businesses. Those with a high school diploma or higher education were less likely to agree with this statement. As the number of

household people increased, the likelihood that respondents would support this statement decreased. Redmond and Bellevue residents were also less likely to agree with this statement.

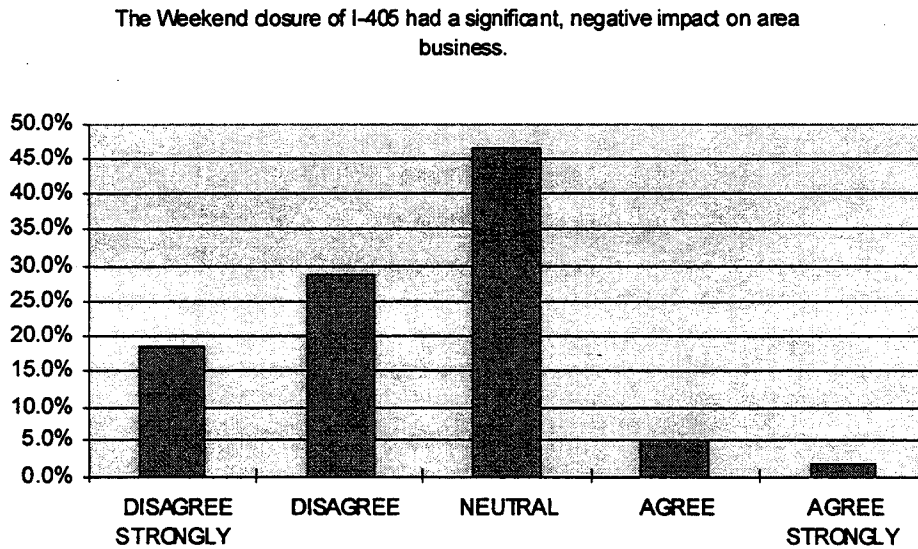


Figure 6-7. Response to the Statement That the Weekend Closure of I-405 Had a Significant, Negative Impact on Area Businesses

MODELING RESULTS: DISCRETE CHOICES

Impact of Travel Plan by the Weekend Closure of I-405

The binary logit model estimates of whether the weekend closure of I-405 affected respondents' travel plans are presented in appendix Table B-5. Respondents less than 30 years old were more likely to consider themselves affected by the closures, but those 55 or over were less likely to believe that their travel plans had been affected. In addition, as household income increased, travel plans were more likely to be affected. Respondents with college degrees were less likely to think that their travel plans had been affected. As the number of children under 6 years old increased, the likelihood of agreeing increased. Bellevue, Renton, and Kent residents were more likely to be affected by the closure than Seattle residents.

Route Selection

Appendix Table B-6 shows binary logit model results for estimating whether respondents used routes that they normally would not have taken. As respondents' age increased, they were less likely to change from routes usually taken. However, as household income increased, the likelihood of route change increased. Respondents with college degrees were less likely to use other routes. Similarly, as the number of children under 6 years old increased, respondents were less likely to use other routes. Respondents with a higher number of operable vehicles were more likely to reroute. Respondents' geographic locations affected their travel behaviors, as expected. Bellevue, Renton, Kent, and Kirkland residents were more likely to use other routes than Seattle residents because Seattle residents were not severely affected by the closures.

Departure Time

The model estimates for whether departure time was changed because of the weekend closures of I-405 are presented in appendix Table B-7. Estimation results show that married people, older respondents, and respondents from low income households (less than \$20,000) were less likely to change departure times. People in higher income households (more than \$50,000) were also less likely to change departure times. However, as the number of children age 6 to 16 increased, respondents were more likely to change their departure time because of the closures. The greater the number of operable vehicles, the less the likelihood of departure time change. As expected, Seattle residents were less likely to change their departure time.

Trip Cancellation

Appendix Table B-8 presents the estimates of whether respondents canceled trips that they would normally have taken because of the weekend closures of I-405. Single people were more likely to cancel their trips. Respondents younger than 30 and respondents with high school diplomas were less likely to cancel their trips. In addition,

as the number of operable vehicles increased, the likelihood of trip cancellation decreased. Renton residents were more likely to cancel their trips.

Shopping Behavior

The estimates for whether respondents shopped at different places because of the weekend closures of I-405 are presented in appendix Table B-9. Single people were less likely to shop at different places. Also, as the number of people in a household increased, the likelihood of this statement decreased. Male respondents were more likely to shop at different places. People younger than 30 had a similar tendency. Respondents with a college degree were more likely to shop at different places, and as the number of children between 6 and 16 increased, the likelihood of this statement increased. Bellevue area residents had positive likelihoods, unlike Seattle area residents.

Awareness of the I-405 Closures

Appendix Table B-10 shows whether respondents were aware of the I-405 closures beforehand. The positive coefficient of the constant term indicates that overall, the public was aware. Middle aged respondents were less likely to be aware of the closures, and higher income household people also the same tendency. However, as education level increased, respondents were more likely to be aware of the closures. Also, as the number of working people in a household increased, respondents were more likely to be aware of the closure plan. It may be that working people were more sensitive to road closure because it might affect their work activities. Bellevue residents were also more likely to be aware of the I-405 closure, perhaps because Bellevue is in and around I-405.

CHAPTER 7 BUSINESS AND RETAIL IMPACTS OF CLOSURES

Data were collected from area businesses during the last week of August to determine the impact of the two weekend closures on businesses. Businesses were contacted by telephone and asked how their business was affected during the two weekend closures. Their response was recorded on a scale of 1 to 5, with 1 being a strong negative impact, 3 being no impact, and 5 being a strong positive impact. The average response, on this scale, for all businesses was exactly 3.0 (indicating no impact on average). Of the 30 businesses, 1 indicated a strong negative impact, 4 indicated a mild negative impact, 22 indicated no impact, and 3 indicated a mild positive impact. Figures 7-1 and 7-2 give some summary information on the survey.

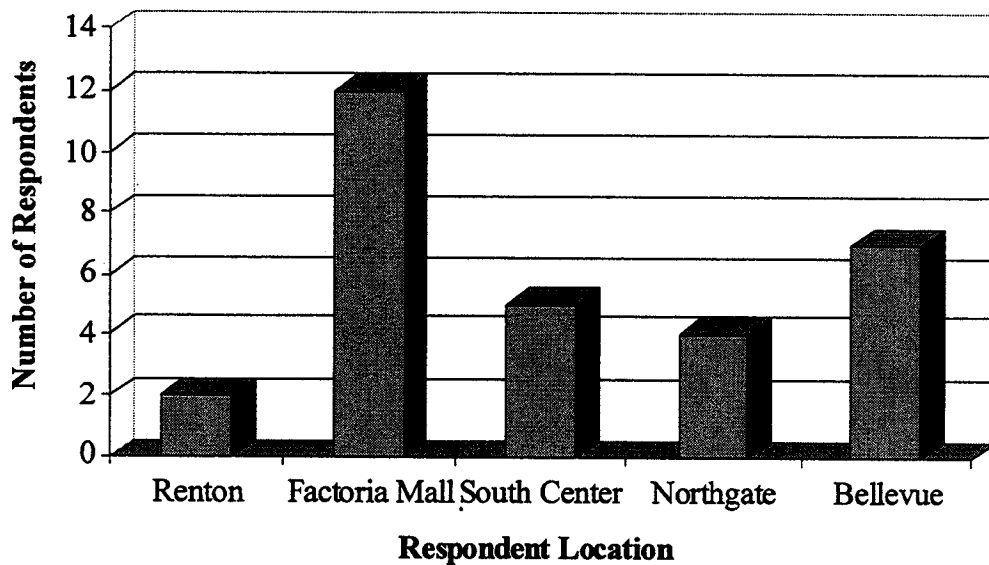


Figure 7-1. Number of Respondents from Specified Locations.

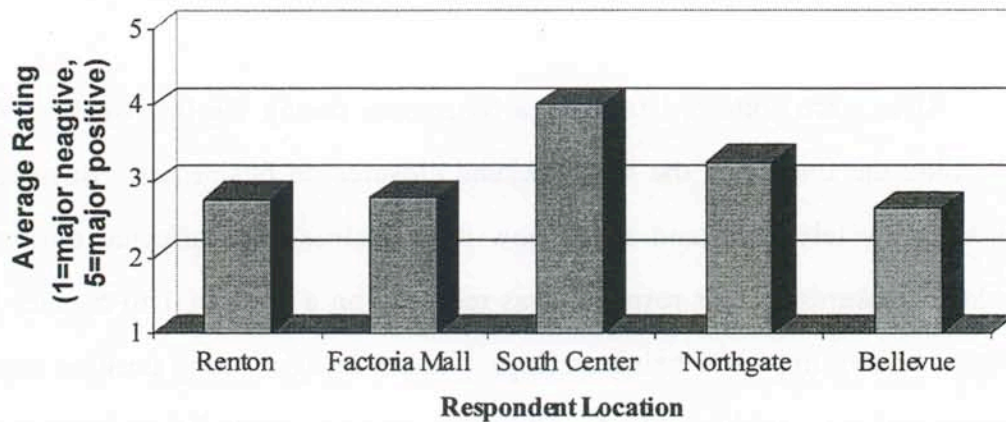


Figure 7-2. Average Ratings of Business Impacts Attributable to Closures by Respondent Location.

Some of the businesses surveyed offered detailed information on the impacts of the closure. One Renton business owner said, “Business was down slightly the first weekend, but not the second. We were not really affected.” (Lermond’s of Renton).

Seven of the Factoria Mall businesses gave the following responses:

“Probably due to back-to-school shopping, business actually increased. People are going to find a way to get to Target.” (Target)

“The closure inconvenienced managers who live in Tacoma, but we were very busy.” (Old Country Buffet)

“Business was helped on the southbound closure and hurt on the northbound closure.” (Big 5)

“We were very slow.” (Torero’s Restaurant)

“No problem, no complaints. The following weekend would have been bad if the closure had occurred then, due to back-to-school shopping.” (Beanpod Restaurant)

“The southbound closure had no effect. Business during the northbound closure was down 20 percent.” (Petco)

“With the sale and it being a new store it is hard to tell.” (Nordstrom)

Two Bellevue businesses responded as follows: “The weekend of the southbound closure, business was half of normal. During the northbound closure business was down but not by as much.” (Scandia Down):

“Business was very slow, but it is hard to differentiate the reason. People have complained, however.” (Kitchen Kitchen)

Businesses at Northgate and South Center did not provide detailed comments.

Eleven trucking firms were surveyed by telephone in Seattle, Tukwila, Kent, and Bellevue and asked whether the weekend closures had an effect on their operations. Responses were measured on a scale of 1 to 5, with 1 being no effect, 3 being some effect, and 5 being a significant effect. The results of the survey are summarized in Figure 7-3. This figure shows that about 64 percent indicated very small or no effect, while 27 percent indicated a significant effect. These results are similar to the business findings, with most firms not being significantly impacted but some indicating significant impacts. While some firms were clearly affected by the closure of a major route in the highway network, overall impacts were surprisingly low.

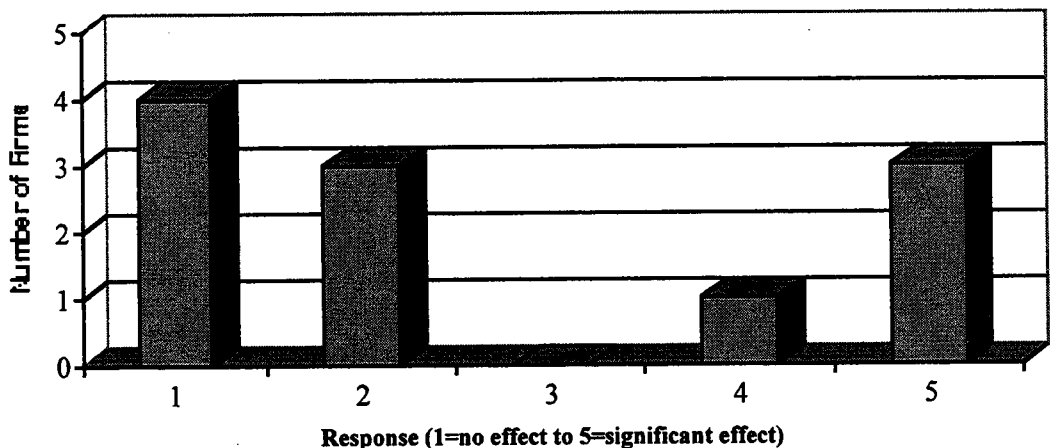


Figure 7-3. Ratings of Impacts upon Trucking Firms

CHAPTER 8 TRAFFIC OPERATIONAL IMPACTS OF CLOSURES

The intent of this chapter is to evaluate the traffic-related impacts of I-405 closure during construction. WSDOT closed traffic in a single direction for two consecutive weekends, August 15 through 17 and August 22 through 24, 1997. This approach was evaluated to determine its impact on vehicle travel time, vehicle miles traveled by single-occupant vehicles (SOV), and vehicle miles traveled by high occupancy vehicles (HOV). Also examined were total emissions, including carbon monoxide (CO), oxides of nitrogen (NO_x), and volatile organic compounds (VOC).

SIMULATION OF I-405 CLOSURES

I-405 closure was evaluated through the application of the calibrated traffic assignment model XXE (as described above). An overview of the model application procedure is presented in Figure 8-1.

The impacts of this approach on traffic congestion in the Seattle area were estimated by using the calibrated XXE traffic assignment model and measured in terms of vehicle travel time and total vehicle-miles-traveled. Table 8-1 summarizes the results, and Figure 8-2 gives the percentage changes in travel times and total vehicle miles traveled.

Table 8-1 shows that closing I-405 from Southcenter to Coal Creek had minimal impact on system performance. However, as expected, all of the measures of system performance increased.

In interpreting the results, it is important to recognize the limitations of the traffic simulation approach. First, the weekend Origin-Destination matrix had to be estimated. Although the researchers were confident that the matrix was reasonably close to the actual conditions, some caution must be used in interpreting the results. Second, our model assigned travel on the basis of expected travel time and assumed that travelers

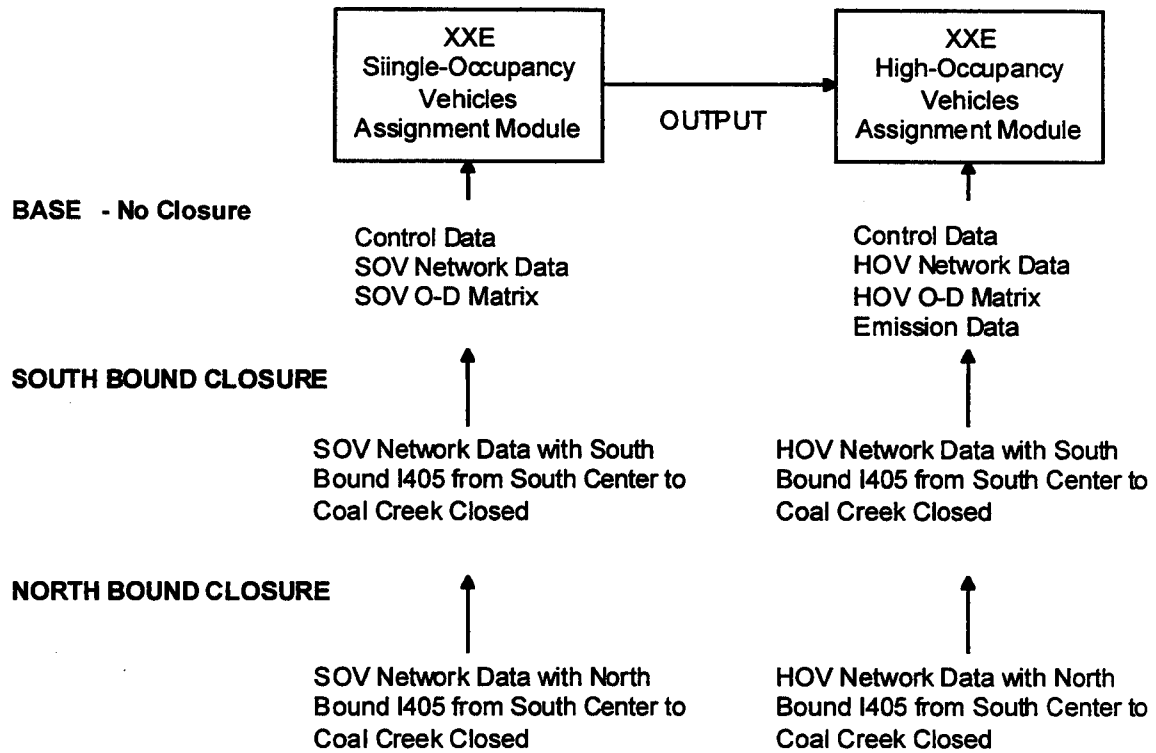


Figure 8-1. Simulation Process

Table 8-1. Simulation Results (weekend peak hour)

	Total Travel Time (veh-hours)	Total Vehicle Miles Traveled	Avg. Congestion (Non-zero links)	Total CO Emission (grams/sec)	Total NOX Emission (grams/sec)	Total VOC Emission (grams/sec)
Base (No Closure)	43,000	1,200,000	0.48	9046.19	1234.08	1283.99
South Bound Closed	48,600	1,220,000	0.52	9809.57	1253.13	1371.44
North Bound Closed	49,300	1,220,000	0.51	10069.10	1259.47	1406.43

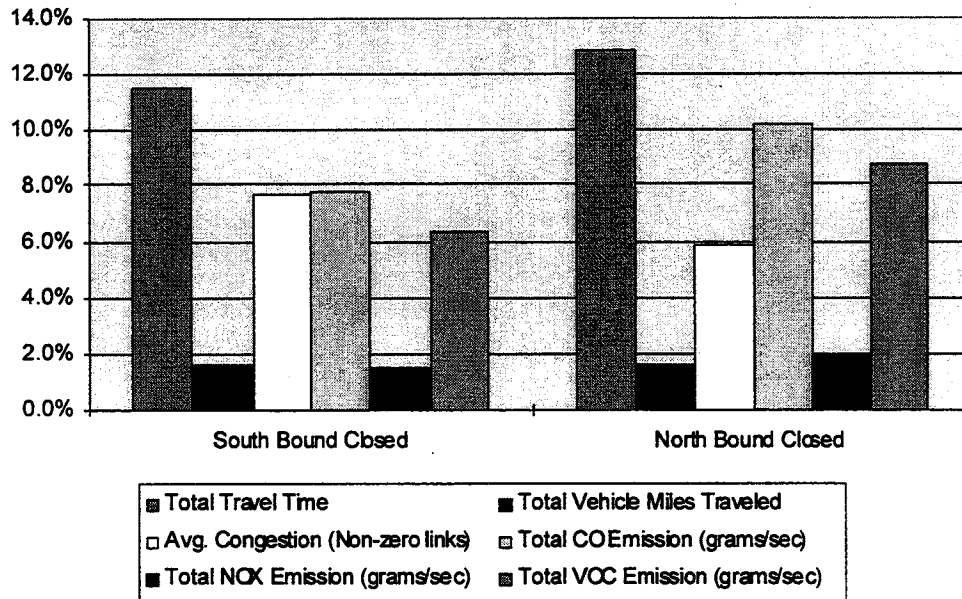


Figure 8-2. The Percentage Change Resulting from the Closures

do not change their trip-departure times or modes in response to congestion. The complete shut-down of I-405 almost certainly would have had great effects on travel characteristics (i.e., departure time and mode choice) that would need to be considered. Nevertheless, in spite of these limitations, the results presented in this chapter provide a good idea of the range of impacts that could be observed.

SCENARIO: HALF CLOSURE

Another possible scenario, closing the half of lanes, was simulated. Table 8-2 summarizes the results, and Figure 8-3 gives the percentage changes in travel times and total vehicle miles traveled. As expected, all of the measures of system performance decreased in comparison with the results of complete closure.

Table 8-2. Simulation Results with Half Closure (weekend peak hour)

	Total Travel Time (veh-hours)	Total Vehicle Mile Traveled	Avg. Congestion (Non-zero links)	Total CO Emission (grams/sec)	Total NOX Emission (grams/sec)	Total VOC Emission (grams/sec)
Base (No Closure)	43,000	1,200,000	0.48	9046.19	1234.08	1283.99
South Bound Closed	44,100 (2.5%)	1,200,000 (0%)	0.49 (2%)	9178.56 (1.4%)	1230.45 (-0.3%)	1299.31 (1.2%)
North Bound Closed	43,900 (2.1%)	1,200,000 (0%)	0.5 (4%)	9228.98 (2.0%)	1234.52 (0.0%)	1303.51 (1.5%)

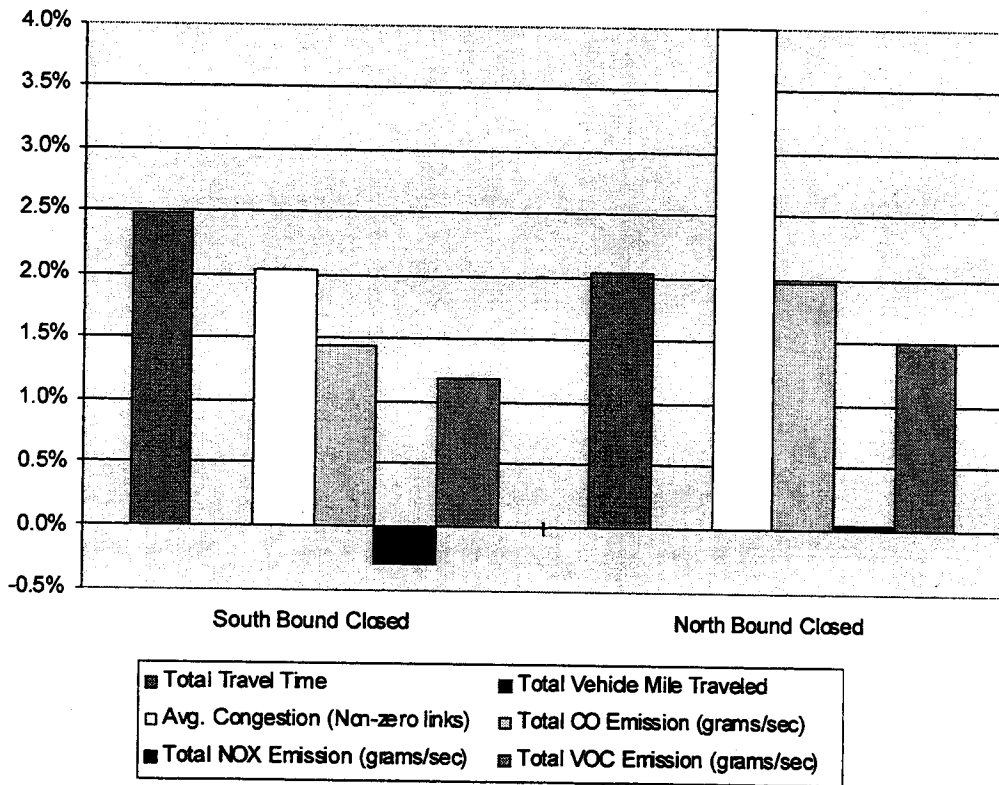


Figure 8-3. The Percentage Change Resulting From Half Closure

CHAPTER 9

EXPERIENCES OF OTHER STATE HIGHWAY AGENCIES

While the researchers knew at the outset of this study that the full weekend closure strategy was unique, learning what other selected states were planning for or had experienced with various closure strategies was deemed valuable. Nine state highway agencies were contacted, and six provided responses to a brief survey, which is included in Appendix C.2. The responding states were among those considered to have heavily populated areas that would require innovative approaches for accomplishing large highway reconstruction or rehabilitation projects. The responding states were Illinois, California, Georgia, Massachusetts, Texas, and Florida.

NUMBER OF PROJECTS

Table 9-1 indicates the amount of highway reconstruction work that the responding states were involved in executing. Only projects exceeding 25,000 tons are included in the counts that are shown for past and future projects. The state of Texas appeared to have a much larger program than the other participating states, although it was not apparent from the survey how any of the states were physically dividing their work.

PREFERRED LANE CLOSURE STRATEGIES

Choices for lane closure strategies were characterized by number of lanes and time of day. Single lane closures were used most often by five of the six states (Table 9-2). As expected, the majority also employed night closures most frequently. There was no consensus on the second or third choices. However, single lane closure was the overall leading choice for number of closure lanes, whereas the choice between night and day was roughly even. The notion of multi-lane closures did not appear significant until the fourth level of frequency was reached. In addition, each state preferred to use the multi-lane strategy first during night hours before selecting it as a daytime option.

Table 9-1. Survey Responses—Number of Projects Exceeding 25,000 Tons

State	Reconstruction Projects >25,000 tons	
	Last 3 Years	Next 3 Years
Illinois	-	-
Georgia	>25	12
Florida	50	50
California	45	50
Massachusetts	45	30
Texas	330	330

Table 9-2. Survey Responses—Preferred Closure Strategies

State	Alternatives Ranked by Frequency of Use			
	First	Second	Third	Fourth
Illinois	Single day	Complete day	Single night	Complete continuous
Georgia	Single night	Single day	Multi-lane night	Multi-lane day
Florida	Single night	Single day	Single continuous	N/A
California	Multi-lane night	Single night	Single day	Multi-lane day
Massachusetts	Single night	Multi-lane night	Single day	Multi-lane day
Texas	Single night	Single day	Multi-lane night	Multi-lane day

QUALITY FROM PREFERRED STRATEGIES

Each state respondent was asked to indicate any quality trends associated with the most frequently used closure strategy. Table 9-3 contains the responses from SHAs that responded with answers other than “no noted difference” (NND) for any of the quality parameters that related directly to the condition of the overlay. None of the respondents noted any differences in gradation, so that category is omitted from the table. Also, the survey did not indicate whether the ride quality was judged by measurement or by inspection.

Table 9-3. Survey Responses—Overlay Quality Parameters

State	Most Frequent Closure Strategy	Densities	Longitudinal Joints	Ride Quality	Cyclic Segregation
Florida	Single night	NND	NND	Worse ride	Higher rate of occurrence
California	Multi-lane night	—	Lower quality	NND	—
Massachusetts	Single night	Lower with greater variability	NND	Worse ride	Higher rate of occurrence
Texas	Single night	Greater variability	Lower quality	Worse ride	Higher rate of occurrence

Because each of the states represented in Table 9-3 utilized the nighttime option most frequently, Table 9-3 may be expected to provide a picture of the type of quality that is often achieved through nighttime paving. The responses indicated that nighttime paving tends to result in greater variability in densities, a rougher ride, more instances of cyclic segregation, and lower quality longitudinal joints. It is encouraging that this study found that the three former difficulties can be overcome.

Table 9-4 contains the results of other performance parameters that are not directly related to the overlay condition. Illinois was the only state that cited no noted difference for all of the parameters. For the two states that noted a change in safety, safety incident rates were lower for both workers and the public. The respondents were almost equally divided on whether pay factors were the same or higher for nighttime paving. Two respondents indicated that traffic control and limited operations for night work resulted in higher pay factors. Because the survey did not query the SHAs on the details of their quality assurance specifications, it is not clear whether they were actually describing higher pay factors or simply higher costs.

Table 9-4. Survey Responses—Performance Parameters Not Related to Overlay Condition

State	Most Frequent Closure Strategy	Safety	Cost Impact	Hourly Production Rates
Georgia	Single night	NND	Higher pay factors for nighttime traffic control	Greater variability
Florida	Single night	NND	NND	Higher rates
California	Multi-lane night	NND	Higher pay factors for limited operations	Greater variability
Massachusetts	Single night	Lower incident rate	Higher pay factors	Lower rates
Texas	Single night	Lower incident rate	NND	Higher rates

Hourly production rates were noted to be different in the form of either greater variability or higher rates. Only one respondent cited lower production rates. The Florida study by Ellis and Kumar (1993) concluded that nighttime paving productivity

(tons/hr) may be as high as for daytime paving, although the total shift production may not be as high. In fact, no statistical difference in paving production rates could be confirmed in their study.

PUBLIC RESPONSE AND FEEDBACK

Public response to closure strategies motivates the search for more innovative strategies. Table 9-5 shows the experiences of the respondents with their most frequently used closure strategy. Respondents said that the public is generally pleased with the approach of partial closures at night. This public response would be expected because conventional views are that the partial night closure is the least disruptive alternative available. As more state highway agencies consider the full weekend closure strategy, more data will become available to gauge user responses and preferences between the full weekend closure and the partial night closure.

Table 9-5. Survey Responses—Reaction and Feedback from Public

State	Most Frequent Closure Strategy	Public Response/Feedback
Illinois	Single day	Businesses prefer
Georgia	Single night	Motorists adjust with little complaint; businesses prefer
Florida	Single night	Motorists adjust with little complaint; businesses prefer; mostly positive feedback
California	Multi-lane night	Motorists adjust with little complaint
Massachusetts	Single night	Mostly positive feedback
Texas	Single night	Mostly positive feedback

APPROACHES UNDER CONSIDERATION

The survey queried respondents on new or innovative closure strategies that would be a departure from current practice for reconstruction projects. Table 9-6 shows the responses and indicates a general trend (four of the six) toward contractual arrangements such as A+B contracting and lane rental. In both of these approaches the responsibility for innovations to minimize impacts to the public rests primarily with the contractor. Herbsman (1995) showed that a significant number of states have taken this approach, namely A+B bidding. He listed 15 states (including California and Georgia) that had used the method at least once, and five of the states—California, Maryland, North Carolina, Missouri, and New York—more than ten times.

Table 9-6. Closure Strategies under Consideration

State	Strategy Considered
Illinois	A + B; nighttime closures
Georgia	Lane rental w/ restrictions
Florida	Lane rental
California	Weekend closures (55 hrs)
Massachusetts	More night work in high ADT areas
Texas	Lane rental

State highway agencies appear to be at various points along the spectrum of innovative highway reconstruction strategies. Out of the six respondents to this study, only California is actively considering the weekend closure option. The picture presented by these responses underscores the uniqueness of this approach and the need to gather more comparative data. Two of the respondents, Illinois and Massachusetts, indicated that some SHAs still have not made extensive use of the nighttime paving option.

SUMMARY

It appears from the survey of selected state highway agencies that the partial nighttime closure strategy is still the most popular strategy for minimizing highway reconstruction impacts to the public. Although night closures create problems related to the quality of the overlay and other performance parameters, the public is generally pleased with the relative minimal impact of this closure strategy. One conclusion might be that the desirability of the full weekend closure alternative will develop only as more states find specific motivations to utilize the option and are successful in minimizing user impacts. The general direction of SHAs, however, appears to be toward A+B bidding and lane rental options that make the contractor responsible for initiating innovations within the confines of the more traditional strategies.

CHAPTER 10 DECISION PROCESS CHECKLIST

After the results and observations made during the course of this study were considered, a decision checklist was created as a guide for assessing the suitability of a specific project for a full weekend closure. The checklist was further refined through consultation with WSDOT personnel representing the project development, traffic control, and construction groups of the Northwest Region. The original objective for the checklist was to establish the steps necessary to determine whether a project should be accomplished by full weekend closures or by night closures. Discussion with WSDOT personnel from the aforementioned groups led to the agreement that the closure strategy decision involved issues of policy that made it too complex for a deterministic checklist. Rather, more valuable would be a checklist that would ensure that all of the appropriate inputs were obtained so that decision makers would have the critical information necessary to make the closure decision. Tables 10-1 through 10-3 contain the final version of the decision process checklist, which is broken into three distinct sections.

The format of the checklist is straightforward. It contains a breakdown of critical information or input categories that should be considered. The three major divisions are (1) routing impacts, (2) contractor considerations, and (3) WSDOT functions. The three tables correspond to these divisions.

The intention of the first section of the checklist (Table 10-1) is to consider three categories of impact to the public. The items included in the checklist cover potential impacts to private motorists, residents and businesses that rely upon the relevant section of highway for through passage, as well as for local access. Sensitive businesses such as hospitals, hotels, and others deserve special consideration when paving operations are scheduled because of both traffic access restrictions and noise inconvenience. Local agencies will have a keen interest in the potential impact, especially because of access and noise, upon citizens living in their jurisdictions. Bus transit agencies and private

transporters of goods should be alerted in the event that their normal routes must be altered.

Table 10-1. Closure Strategy Decision Process Checklist for Routing Impacts

CATEGORY	ISSUE	COMMENTS
Network Geometry and Traffic Safety	Identify alternative through routes	Planned detours for motorists to pass through area may be necessary.
	Identify alternative local area access routes	Planned detours for access to local businesses and homes may be necessary.
	Identify potential traffic safety impacts	Diverted traffic may increase incidents on lower capacity routes.
	Note number and height of drop-offs	Significant drop-off heights increase safety risks for motorists.
Inconvenience	Contact local agencies early	Local agencies will have a well informed perspective on impact to their respective communities.
	Note number of noise nights required/ available	Extensions may be required and may not be allowable.
	Note local zoning and ordinances	Changes in restrictions may occur along length of project if crossing municipalities.
	Note critical nearby facilities	Sensitive facilities needing secure access or controlled environments such as hospitals, hotels, etc. should be considered.
Transit Impacts	Contact public transportation agencies	Bus routes may be impacted.
	Contact private carriers/transporters	Trucking distribution firms will need to select alternative routes.

The focus of the second division of the checklist (Table 10-2) is issues that will affect the ability of the contractor to perform satisfactorily. Although most of the activities that are listed should be considered and ultimately determined by the contractor, it would serve the project development team well to analyze these project parameters ahead of time to gauge feasibility. Early consideration by the WSDOT personnel may help facilitate contractor planning as the means for owner support of specific logistical options are already established.

Table 10-2. Closure Strategy Decision Process Checklist for Contractor Considerations

CATEGORY	ISSUE	COMMENTS
Contractor Logistics	Plan for secure site access	Plan for access security should be worked out with appropriate local law enforcement and businesses.
	Plan for secure alternative routes	Backup routes should be planned in the event of a major traffic incident.
	Note proximity of plant(s) to job site	Even though contractor may not be selected, the location of known permanent mixing facilities that may be used should be identified and considered in route planning.
	Note usage constraints on haul route(s)	Some roads may have load and/or time restrictions.
	Explore multiple access points	Plant location, job site movements, etc. may lend themselves to multiple site entrance/exit points for contractor's trucks.
	Contact contractor associations	Contractor associations such as AGC can provide feedback concerning the attractiveness of a proposed strategy from a contractor's perspective.
Worker Safety	Assign traffic control	Situation may dictate need for WSDOT to handle traffic control instead of contractor, and local law enforcement should be informed.
Product Quality	Note permanent lighting at site	Absence of permanent lighting may dictate need for temporary lighting to be required in contract.
	Note expected day and night temperatures	Cold temperatures or large gradients between day and night may affect the speed of paving as constrained by rolling operations. This fact should be considered in the estimate of required paving time.

Table 10-3. Closure Strategy Decision Process Checklist for WSDOT Functions

CATEGORY	ISSUE	COMMENTS
Scheduling	Note number and location of full closures for season	Too many such closures close together in time and/or geography will increase inconvenience to users.
	Note timing of holidays	Travel and festive holidays should be avoided to accommodate motorists.
	Note timing of cultural and sporting events	Major events require that travel alternatives be open.
	Allot contingency time for weather delays	WSDOT estimate of time should include a proper allowance for rain or temperature interruptions to compare against contractor's schedule.
	Select alternate closure time options	Backup full closure times may be impossible to schedule late in season, so night option may be necessary.
	Give contractor options early	When the contractor is known, that contractor's successful performance is enabled by appropriate time to plan and adjust.
Public Information	Announce plan in time for the initial spring press conference	This annual event draws the attention of interested parties and initiates the comprehensive public information campaign for the paving season.
	Determine advance notification time window	Businesses will require more time to adjust plans.
	Coordinate between projects	A paving season overview will outline the potential problems in conducting campaigns for numerous special projects. Effectiveness can be lost if a special closure strategy is used too frequently in one season or if overlapping campaigns are executed poorly.
	Plan multimedia approach (TV, newspapers, web, VMS, radio)	Broadest communication is essential to ensure successful motorist adjustments.

Table 10-3 outlines specific considerations that relate to scheduling a closure and giving the public appropriate advance notification. It is apparent that a major key to success for potentially high impact closure strategies such as the full weekend closure is ensuring that the public is aware of the closure plans well in advance and that diverting traffic during major local community events is avoided. Early communication to the

contractor of closure option considerations also improves the contractor's ability to prepare a successful operation. For example, for the I-405 full weekend closures, the early consultation with the contractor clearly contributed to recognition of the importance of ensuring site access for the truck fleet and resulted in coordination among the contractor, Boeing, and the City of Renton to establish the location of the mobile hot mix facility.

The decision checklist is recommended as a guide for assembling critical information and support for the full weekend closure option versus the nighttime closure option. However, it is acknowledged that such decisions are not simply a matter of technical logistics but of public policy and that closure decisions ultimately require a qualitative judgment. Along those lines, public perception becomes a key factor. Copies of some of the numerous newspaper articles that covered the I-405 closure are included in Appendix F, as is a log of television news coverage.

CHAPTER 11 CONCLUSIONS AND RECOMMENDATIONS

The preceding presentation of data and discussion of results provide a generally positive portrait of the I-405 weekend closure. While only limited generalizations can be made because of the uniqueness of construction projects, it is clear from this study that weekend closure is an attractive option for highway reconstruction. Specific conclusions and recommendations are highlighted below under the categories of construction, user impacts, and decision making.

CONSTRUCTION

The following results and conclusions are noted concerning construction performance:

- Statistical analysis revealed no difference in surface smoothness between night and day shifts of the weekend closure. However, a larger data set is desirable for forming more general conclusions.
- Practically all of the surface smoothness measurements well exceeded the 80-mm/km limit specified in a particular supplemental specification for flexible pavements.
- Statistical analysis revealed no difference in in-place densities between night and day shifts of the weekend closure.
- Levels of quality in density and gradation compared favorably to historical data from across the nation.
- Average shift production rates and hourly production rates per truck for the weekend closure were higher than those documented for a similar nighttime paving project. This result underscores the premium production benefits derived from close proximity of the asphalt plant and traffic-free access for the asphalt delivery trucks. Therefore, the

investigators urge careful consideration of the impact of a remote production facility on projects that utilize the weekend closure option.

- Although contractor performance in reaching specified density and in constructing longitudinal joints appeared to be affected by nighttime temperature gradients, worker fatigue, and loss of visibility, the aggregation of measures of quality indicated a high quality product. These facts support a general impression of success for the weekend closure strategy.
- Other states appear to be leaning toward construction strategies that put the balance of responsibility for minimizing user and community impact on the contractor. The more accommodating weekend closure strategy was only being considered by one of the states that were polled, California.

USER IMPACT AND PUBLIC REACTION

The following results and conclusions are noted concerning impacts to businesses and the motoring public:

- The awareness of the closures was very high, indicating that media work and the overall marketing effort was well done.
- Given the high level of awareness, individuals were able to plan around the closures, and the public's perception was that the closures had a minimal impact on their travel patterns.
- The public felt that the impact on businesses was minimal, and this perception was corroborated by their indication that few shopping trips were altered from standard travel patterns.
- The comments on the closure and the construction approach were generally very favorable. This is strong evidence of the public's acceptance of the repaving effort.

- The survey of businesses indicated some mixed results, with some businesses gaining and others losing. It is difficult to distinguish such variations from the normal variation that is likely to occur from week to week. However, the business survey results showed clearly that the strong negative impacts many had predicted (see Appendix F) did not materialize. Similarly, the survey of trucking companies indicated that the impacts on freight movement were minimal.
- Traffic simulations showed a relatively modest increase in overall congestion and emissions as a result of the closure. The simulations also showed that in terms of overall impact on congestion, total closure was preferable to single/multiple lane closures (the more traditional construction approach). All simulation findings pointed to the general success of the total closure approach to rehabilitation projects.

DECISION MAKING

The authors have recommended a checklist of items that should be considered when closure strategies are selected for highway reconstruction projects. The checklist could be used as a basis for preparing a checklist of items that are most relevant to a specific project.

REFERENCES

- Amemiya, T. (1985). *Advanced Econometrics*, Harvard University Press, Cambridge, Massachusetts.
- Asphalt Construction Handbook*. (1992). Barber-Greene, DeKalb, IL.
- Ben-Akiva, M. and S. Lerman (1987). *Discrete Choice Analysis*. MIT Press, Cambridge, MA.
- Berkson, J. (1944). Application of the logistic function to Bioassay, *Journal of America Statistics Association*, 39, 357-365.
- Daganzo, C., F. Bouthelie and Y. Sheffi (1977). Multinomial probit and qualitative choice: A computationally efficient algorithm, *Transportation Science* 11:338-358.
- Domencich, T.A. and D. McFadden (1975). *Urban Travel Demand: A behavioral analysis*, North-Holland Publishing Company.
- Ellis, R.D. and S.J. Amos (1996a). Development of work zone lighting standards for nighttime highway work. *Transportation Research Record 1529*, TRB, National Research Council, Washington, D.C., pp. 35-42.
- Ellis, R.D. and A. Kumar (1993). "The influence of nighttime construction on cost and productivity." *Transportation Research Record 1389*, Transportation Research Board, national Academy Press, Washington, DC
- Garrison, D. and F. Mannering (1990). Assessing the traffic impacts of freeway incidents and driver information, *ITE Journal*, Vol. 60, No. 8, 19-23.
- Garrison, D., B. Sebranke, and F. Mannering (1989). Seattle-area incident impact analysis: microcomputer traffic simulation results, Volume III, WA-RD 204.4, 131pp.
- Greene, W.H. (1993). *Econometric analysis*, 2nd Ed, Macmillan Publishing.
- Greene, W.H. (1995). *LIMDEP 7.0 User's Manual*, Econometric Software Inc.
- Hall, J.W. and V.M. Lorenz (1989). Characteristics of construction zone accidents. *Transportation Research Record 1230*, TRB, National Research Council, Washington, D.C., 1989, pp. 20-27.
- Hausman, J and D.A. Wise (1978). A conditional probit model for qualitative choice: Discrete decisions recognizing interdependence and heterogeneous preference, *Econometrica* 46, 403-426.
- Hausman, J. and D. McFadden (1984). Specification tests for the multinomial logit model, *Econometrica* 52, 1219-1240.
- Herbsman, Z.J. (1994). "A+B bidding method—hidden success story for highway construction." *J. of Constr. Engrg. and Mgt.*, ASCE, 121(4), 430-437.

- Hinze, J.W. and D. Carlisle (1990). An Evaluation of the important variables in nighttime construction. Transportation Northwest (TRANSNOW), University of Washington, Seattle.
- Horowitz, J. (1981). Identification and diagnosis of specification errors in the multinomial logit model, *Transportation Research* 15B, No. 5, 345-360.
- Horowitz, J. (1985). Travel and location behavior: State of the art and research opportunities, *Transportation Research* 19A, No. 5/6, 441-453.
- Hot Mix Asphalt Fundamentals*, Compaction America, Inc., Kewanee, IL.
- Huft, D.L. (1992). "Analysis and recommendations concerning profilograph measurements on F0081(50)107 Kingsbury County." *Transportation Research Record* 1348, Transportation Research Board, 29-34.
- Hughes, C.S. (1996). *NCHRP Synthesis of Highway Practice 232: Variability in Highway Pavement Construction*. TRB, National Research Council, Washington, D.C., 38 pp.
- Lerman, S. and C. Manski (1981). On the use of simulated frequencies to approximate choice probabilities, in: C. F. Manski and Daniel McFadden eds., *Structural analysis of discrete data with econometric applications*, MIT Press, Cambridge, MA.
- Linden, R.N., Mahoney, J.P., and Jackson, N.C. (1989). "Effect of Compaction on Asphalt Performance." *Transportation Research Record* 1217, TRB, National Research Council, Washington, D.C.
- Luce, R. and P. Suppes (1965). Preference, utility and subjective probability,. In handbook of mathematical psychology, vol. 3, R. Luce, R. Bush and E. Galanter eds., Wiley, New York.
- Mannering, F. and D. Hensher (1987). Discrete/continuous econometric models and their application to transport analysis. *Transport Reviews* 7(3), 227-244.
- Mannering, F., S. Abu-Eisheh and A. Arnadottir (1990). Dynamic traffic equilibrium with discrete/continuous econometric models. *Transportation Science*, Vol. 24, No. 2, 105-116.
- Markey, S.J., Mahoney, J.P., and Gietz, R.H. (1994). "An initial evaluation of the WSDOT quality assurance specification for asphalt concrete". Report No. WA-RD 326.1 to the Washington State Department of Transportation, April.
- McFadden, D. (1981). Econometric models of probabilistic choice, in: C. F. Manski and Daniel McFadden eds., *Structural analysis of discrete data with econometric applications*, MIT Press, Cambridge, MA.
- McFadden, D., W. Tye and K. Train (1977). An application of diagnostic tests for the irrelevant alternatives property of multinomial logit model, *Transportation Research Board* 637, 39-46.

- Pal, R. and K.C. Sinha (1996a). Evaluation of crossover and partial lane closure strategies for interstate work zones in Indiana. *Transportation Research Record 1529*, TRB, National Research Council, Washington, D.C., pp. 10-18.
- Pal, R. and K.C. Sinha (1996b). Analysis of crash rates at interstate work zones in Indiana. *Transportation Research Record 1529*, TRB, National Research Council, Washington, D.C., pp. 43-53.
- Paulsen, R.J., D.W. Harwood, and J.C. Glennon (1978). Status of traffic safety in highway construction zones. *Transportation Research Record 693*, TRB, National Research Council, Washington, D.C.
- Pigman, J.G., and K. R. Agent (1990). Highway crashes in construction and maintenance work zones. *Transportation Research Record 1270*, TRB, National Research Council, Washington, D.C., pp. 12-21.
- Price, D.S. (1986). *Nighttime Paving*. Washington D.C., Colorado Department of Transportation for Federal Highway Administration.
- Read, S.A. (1996). Construction related temperature differential damage in asphalt concrete pavements. Masters thesis submitted to the University of Washington Department of Civil Engineering.
- Scofield, L.A., Kalvela, S.A., and Anderson, M.R. (1992). "Evaluation of California profilograph." *Transportation Research Record 1348*, Transportation Research Board, 1-7.
- Small, K. and C. Hsiao (1982). Multinomial logit specification tests, *International Economic Review*, Vol. 26, No. 3, 619-627.
- SR405 Mainline Overlay Report: C4756 Tukwila to Factoria SC&DI Stage 1 (1997). Final draft, WSDOT, August.
- Thurston, L. (1927). A law of comparative judgement, *Psychological Review* 34, 273-286.
- Train, K. (1986). *Qualitative Choice Analysis: Theory, Econometrics, and an Application to Automobile Demand*. MIT Press, Cambridge, MA.
- Trowbridge, Amity, Doohee Nam, Fred Mannering and Jodi Carson (1996). The potential for freight productivity improvements along urban corridors, WA-RD 415.1.
- Wang, J., W.E. Hughes, F.M. Council, and J.F. Paniati (1996). Investigation of highway work zone crashes: what we know and what we don't know. *Transportation Research Record 1529*, TRB, National Research Council, Washington, D.C., pp. 54-62.
- Zavoina, R and W. McElvey (1975). A statistical model for the analysis of ordinal level dependent variables, *Journal of mathematical sociology*, Summer, 103-120.

APPENDIX A
METHODOLOGY

APPENDIX A METHODOLOGY

METHODOLOGICAL APPROACH: TRAFFIC OPERATIONAL IMPACTS

To measure the impact of complete weekends closures, several traffic assignment software packages were considered. The traffic assignment package chosen is a standard user equilibrium assignment package that had been previously applied to the Seattle network with considerable success (Garrison and Mannering 1990). The assignment package, XXE, is a deterministic, macroscopic assignment program that is based on the user-equilibrium theory. This theory is that all travelers will choose routes that minimize their travel times and user equilibrium will exist when no traveler can unilaterally improve his/her travel time by changing routes. The package predicts traffic flows on individual highway links for a highway network by using an origin-destination matrix, the physical characteristics of the highway network, and highway link performance functions (functions that relate travel time to traffic volume). A more detailed explanation of the mathematical formulae, assumptions, and constraints of the methodology of XXE can be found in Garrison, Sebranke, and Mannering (1989).

Use of the XXE program required three input files: (1) a network file, NW.DAT, (2) a vehicle origin-destination file, OD.DAT, and (3) a control file, CN.DAT. The data for these files needed to assess the I-405 closures discussed above are described in the following sections.

Input Files

NW.DAT

NW.DAT contained all the data pertaining to the link performance characteristics. It was structured in two parts. Each line in the first part of NW.DAT contained the highway link origin, the highway link destination, the length of the link, the capacity of the link, the speed limit of the link, and a short description of the link. A more detailed

explanation can be found in "Generation and Assessment of Incident Management Strategies Volume III" (Garrison et al. 1989). The general format of this input file is given in Table A-1. The data in this file had to be sorted by ascending order, from the "from" nodes to the "to" nodes.

Table A-1. The Format of the NW.DAT Input File

Columns	Format	Description
1-4	I4	"From" node or A-node of link
5-8	I4	"To" node or B-node of link
9-13	F5.2	Link length, miles
14-18	F5.0	Capacity at LOS E
19-21	F3.0	Free flow speed on link, mph
22-41	5A4	Link description

OD.DAT

The OD.DAT file contained all the information needed from the origin-destination matrix. Each line of this file listed the origin, the destination, and the number of vehicles that traveled from the origin to destination in the period of interest. The format of this file is given in Table A-2. Similarly to the NW.DAT file, the OD.DAT file had to be sorted in ascending order—first by origin zone and then by destination zone.

Table A-2. The Format of the OD.DAT Input File

Columns	Format	Description
1 - 4	I4	Origin zone
5 - 7	I3	Destination zone
8 - 12	F5.0	Trips from origin to destination

CN.DAT

The CN.DAT file described the files NW.DAT and OD.DAT. It also described the main program values for convergence (convergence criteria for the user equilibrium Frank-Wolfe algorithm), the maximum number of iterations if Frank-Wolfe algorithm convergence was not achieved, and the type of printout desired. The format this data file is presented in Table A-3.

Table A-3. The Format of the CN.DAT Input File

Columns	Format	Description
1 - 5	I5	Total number of links
6 - 10	I5	Number of zones
11 - 15	I5	Total number of nodes
16 - 20	I5	Number of transportation links
21 - 25	I5	Number of records on OD.DAT
26 - 30	I5	Number of first network node
31 - 38	F8.5	Convergence criterion
39 - 41	I3	Maximum number of iterations
42 - 44	I3	Print centroid connectors (1 = yes, 2 = no)

Network Description

The application of the user equilibrium model to the Seattle-area highway network required that highway links and nodes be specified and that the origin-destination characteristics of both SOV and HOV travel be determined. The manner in which this was done is described below.

Links and Nodes

The network defined for this analysis consisted of 1002 directional links, 277 nodes, and 30 origin and destination zones. Of the 1002 directional links, 503 were transportation links; the remaining 499 links were access links between the transportation

network and the zone centroid. It was impractical to include all the streets and intersections in the model; instead, the freeways, highways, and major arterials were used to represent the network. All other streets were assumed not to contribute significantly to the volumes of interzonal traffic and, more importantly, were assumed to have minimal impact on the travel times and overall traffic congestion resulting from the implementation of the proposed options.

The highway links included in the analysis described the primary commuting routes and common diversion routes within the Seattle area. Routes included were I-5, I-90, I-405, SR 99, SR 104, SR 167, SR 202, SR 509, SR 518, SR 520, SR 522, SR 599, SR 900, SR 908, and a number of arterials.

Origin and Destination Data

Because weekend origin-destination (O-D) data were not available, a systematic, iterative approach was adopted in which estimated (by the XXE traffic model) weekend O-D matrices for single occupancy vehicles (SOV) and high occupancy vehicles (HOV) were compared to actual observed weekend peak-hour traffic flows in August 1996. If estimated traffic flows deviated from observed traffic flows, the O-D matrix was revised and the process was repeated until model-estimated and observed traffic flows were virtually identical.

As an initial point, Origin and Destination matrices for single occupant and high occupant vehicles were obtained from the previous study ("The Potential for Freight Productivity Improvements along Urban Corridors," Trowbridge et al. 1996). Morning peak hour O-D matrices was available for the year of 1990. The weekend O-D matrix was first approximated by reducing the single-occupancy vehicle's O-D trip matrix by 20 percent and the high-occupancy vehicle's O-D trip matrix by 25 percent on the basis of traffic characteristics observed during the weekends of August 1996. The assumption of 20/25 percent was a good starting point and matched actual traffic-count data reasonably well.

Note that this iterative procedure did not produce a unique solution. That is, in theory, many different O-D matrices could produce the same observed weekend flows. However, our approach of using the single-occupant O-D matrix along with a separate high-occupancy O-D matrix gave us some confidence that our constructed O-D matrices were close to the actual O-D matrices.

Model Calibration

After the appropriate data for the network (highway-link information) had been, existing traffic flows were simulated. The simulation required two O-D matrices—one for SOVs and one for HOVs. The traffic indicated in these two matrices was assigned sequentially (a simultaneous assignment was not mathematically possible within the XXE model and may not have been realistic because of the lane choices made by HOVs while en route). The simulation-running sequence of first SOVs and then HOVs seemed logical. SOVs do not have a choice to use the HOV lanes, so it seemed natural to assign them first. HOVs can decide to take HOV lanes in response to congestion observed in the general purpose lanes and can thus respond to SOV traffic flows. Therefore, they were assigned second.

Next, the model was calibrated. The objective of calibration was to replicate the actual traffic flows on the network. The process of calibrating the model involved three steps. First, the access-link lengths (i.e., links that allow trips from the centroids of traffic zones to the physical highway network) were adjusted. Zonal-centroid to highway-network access points were added, and the access-link capacity was adjusted. (These access links are not physical highway links, and thus their length and capacity were intended to represent the difficulty that travelers in the traffic zone encounter, in terms of distance and congestion, when they access or exit the physical highway network.)

Second, the network was refined. This process included adding and deleting links and nodes and adjusting capacities, lengths, and the speeds of various links to closely approximate actual vehicle counts. Third, the origin-destination matrices were adjusted

through a procedure similar to that described above for the creation of the weekend O-D matrix.

The actual calibration process could not begin until the XXE model had been run error free. This step involved a painstaking search through the data files, NW.DAT and CN.DAT, to determine whether any links had been omitted or had been improperly coded. In terms of coding, data on no-turning restrictions were collected and, to prohibit vehicles from traveling on turning-restricted links, separate links and nodes were defined for each direction of travel. This problem proved to be quite significant near the Seattle central business district.

Once a successful run had been accomplished, the links of the modeled network were refined to provide a more accurate description of existing conditions. To account for merging, weaving, and geometric effects, the capacity determination procedures outlined in the HCM (Highway Capacity Manual 1994) were used to determine link capacity, a critical input element.

The network was considered to be calibrated when most traffic volumes were within 20 percent of the measured counts obtained from the Traffic Systems Management Center (TSMC) traffic database.

Emission Factors

The EPA MOBILE5A model was used to calculate the emission factors for carbon monoxide, oxides of nitrogen, and volatile organic compounds. These values were then used to create the emission factor input files (CO.DAT, NOX.DAT, VOC.DAT) to incorporate into the XXE model. The input parameters for MOBILE5A were obtained from the Puget Sound Air Pollution Control Agency.

These emissions are calculated by the following procedure:

$$\frac{((\text{VMT} * (\text{grams pollutant}) / \text{VMT}))}{\text{Time Period}} = \text{grams pollutants/sec}$$

Note that emission factors vary considerably with the speed of the vehicles. Thus, XXE was revised to calculate the mobile emissions of each link by applying the correct emission factor associated with the calculated average speed of each link. However, for speeds lower than 5 mph or greater than 65 mph, emissions were calculated by applying a constant emission factor interpolated from the CO.DAT, NOX.DAT, and VOC.DAT files.

USER SURVEY ANALYSIS METHODOLOGY

Discrete Choice Models

Discrete choice problems have been of interest to researchers for many years in a variety of disciplines, including the transportation field. The probabilistic choice model based on a utility approach originally appeared in mathematical psychology (see Thurston 1972, Luce and Suppes 1965) and also has been used in biometrics applications (Berkson 1944). The applications of discrete choice models to transportation have been oriented toward mode choice and other travel related choices such as trip destination, trip frequency, car ownership, residential location, and housing (Domencich and McFadden 1975, Amemiya 1985, Horowitz 1985, Train 1986, Mannering 1987, Ben-Akiva and Lerman 1987, Mannering *et al.* 1990). Discrete choice models assume that an individual's choices among the available alternatives can be described with a utility function and that the individual selects the alternatives with the greatest utility. The utility is a sum of (1) a deterministic component that accounts for systematic effects of observed variables that influence a choice and (2) a random component that accounts for the effects of unobserved variables. The individual is always assumed to select the utility-maximizing choices, implying that the utility of the chosen alternative will exceed the utilities of all of the other feasible alternatives.

Multinomial Logit/Probit Model

Suppose an individual, i , has n alternative choices. The systematic utility, v_{ij} , is a function of the observed attributes of alternative j and of the observed socioeconomic

characteristics of i . Unobserved characteristics, such as tastes and unmeasured attributes of alternatives are captured in the error term (a random component) ε_{ij} . So, the utility (U_{ij}) of choice j to an individual (i) can be expressed as follows:

$$U_{ij} = v_{ij} + \varepsilon_{ij} \quad (\text{A-1})$$

Assuming that random components (ε_{ij}) are independently and identically distributed (IID) with Gumbel type I distribution, a multinomial logit model can be derived. The multinomial logit model is defined by

$$P_{ij} = \left[\frac{m_i}{\sum_{k=0}^{m_i} \exp(x'_{ik}\beta)} \right]^{-1} \exp(x'_{ij}\beta),$$

$$i = 1, 2, \dots, n \text{ and } j = 0, 1, \dots, m_i \quad (\text{A-2})$$

and the loglikelihood function for the multinomial logit model is given by

$$\log L(\beta_1, \dots, \beta_k) = \sum_{i=1}^n \sum_{j=1}^C Y_{ij} \left[\bar{\beta}' x_{ij} - \log \left(\sum_{i=1}^C e^{\beta x_{ij}} \right) \right] \quad (\text{A-3})$$

The most widely discussed aspect of the multinomial logit model is independence from irrelevant alternative property (IIA), which means that the ratio of choice probabilities of any two alternatives is entirely unaffected by the systematic utilities of any other alternative. McFadden, Tye, and Train (1977); Horowitz (1981); Hausman and McFadden (1984); and Small and Hsiao (1985) developed tests to detect violations of the IIA properties. The procedure of Hausman and McFadden's specification test is, first, to estimate the model with all choices. The alternative specification is the model with a smaller set of choices. Thus, the model is estimated with this restricted set of alternatives and the same model specification. The set of observations is reduced to those in which one of the smaller sets of choices was made. The test statistic is asymptotically χ^2 distributed with k degrees of freedom, where k is the number of elements in the subvector

of coefficients that is identifiable from the restricted choice set model (Ben-Akiva and Lerman 1987, Greene 1995).

$$((\hat{\beta}_c - \hat{\beta}_c)'(\hat{\beta}_c - \hat{\beta}_c))^{-1}(\hat{\beta}_c - \hat{\beta}_c) \quad (\text{A-4})$$

Another popular approach is the multinomial probit model, which can handle arbitrary correlations expressed in the form of a general variance-covariance matrix. In this model, a random component (ε_{ij}) has a normal distribution. The loglikelihood function for a binary probit model is given by

$$\log L(\beta_1, \dots, \beta_k) = \sum_{i=1}^n Y_i \log \Phi(\beta'x_i) + \sum_{i=1}^n (1-Y_i) \log(1-\Phi(\beta'x_i)) \quad (\text{A-5})$$

$$\text{where, } \Phi(t) = \frac{1}{\sqrt{2\pi}} \int_{-\infty}^t e^{-u^2/2} du$$

The probit model is difficult to use because the integrals that occur have to be analyzed numerically. Several procedures have been developed, such as direct numerical methods (Hausman and Wise 1978), the simulated frequency method (Lerman and Manski 1981), and iterative approximation procedures (Daganzo *et al.* 1977). In contrast, the multinomial logit model is mathematically significant and simpler. More detailed presentations of the assumptions and derivations of discrete choice models can be found in Domencich and McFadden (1975), McFadden (1981), Ben-Akiva and Lerman (1987), and others.

Ordered Logit/Probit Model

The ordered model is appropriate in applications such as opinion surveys, in which the respondent expresses a preference with an ordinal ranking. Although the outcome is discrete, the multinomial logit or probit models would fail to account for the ordinal nature of the dependent variable (Zavoina and McElvey 1975). If the situation being modeled is unordered, an ordered model can create serious biases in the estimation

of the probabilities. On the other hand, if the type of event under study is ordered, an unordered model loses efficiency rather than consistency (Amemiya 1985).

The ordered model defined by

$$P(y = j|x, \theta) = p(S_j) \quad (\text{A-6})$$

for some probability measure (p) depending on x and θ , and a finite sequence of successive interval $\{S_j\}$, depending on x and θ . In most cases, the ordered model takes a simpler form for some distribution functions.

$$P(y = j|x, \mu, \beta) = F(\mu_j - x\beta') - F(\mu_{j+1} - x\beta') \quad (\text{A-7})$$

$$j = 0, 1, \dots, m, \quad \mu_0 = -\infty, \quad \mu_j \leq \mu_{j+1}, \quad \mu_{m+1} = \infty$$

If $F = \Phi$ (i.e., a standard normal distribution), equation A-7 defines the ordered probit model, and if $F = \Lambda$ (i.e., a standard logistic distribution), it defines the ordered logit model. The model depicted in equation A-7 is motivated by consideration of an unobserved continuous random variable (y^*), which determines the outcome of y by the rule $y = j$ if and only if $\mu_j < y^* < \mu_{j+1}$ with $j = 0, 1, \dots, m$. With a normal distribution, the probabilities can be shown as follows:

$$P(y = 0) = \Phi(-\beta'x), \quad (\text{A-8})$$

$$P(y = 1) = \Phi(\mu_1 - \beta'x) - \Phi(-\beta'x),$$

$$P(y = 2) = \Phi(\mu_2 - \beta'x) - \Phi(\mu_1 - \beta'x),$$

⋮

$$P(y = j) = 1 - \Phi(\mu_{j-1} - \beta'x).$$

The computations of marginal effects are particularly meaningful for the ordered model, in which the effect of variable x on the intermediate categories is ambiguous. The marginal effect of regressors on the probabilities is not equal to the coefficients. This

point has been overlooked in some of the literature. Most papers simply report coefficients and t-statistics with some commentary about significant effects, but they rarely suggest upon what or in what direction those effects are exerted (Greene 1993). For example, suppose there are three categories (i.e., 0, 1, 2), and marginal effects of changes in the categories are

$$\begin{aligned} \frac{fP(y=0)}{f\mathbf{x}} &= -\phi(\beta'\mathbf{x})\beta, \\ \frac{fP(y=1)}{f\mathbf{x}} &= (\phi(-\beta'\mathbf{x}) - \Phi(\mu - \beta'\mathbf{x}))\beta, \\ \frac{fP(y=2)}{f\mathbf{x}} &= \phi(\mu - \beta'\mathbf{x})\beta \end{aligned} \tag{A-9}$$

In Figure A-1, the probability distributions of y and y^* are shown in the solid curves. Assuming that a particular β was positive would shift some probability to the right or to the left, but what would happen to the middle category is ambiguous. In general, relative to the signs of the coefficients, only the sign of changes in $P(y=0)$ and $P(y=j)$ are clear. In this example, $P(y=0)$ has the opposite sign of β , and $P(y=2)$ must have the same sign as β . Thus, the coefficients in the model should be interpreted with caution.

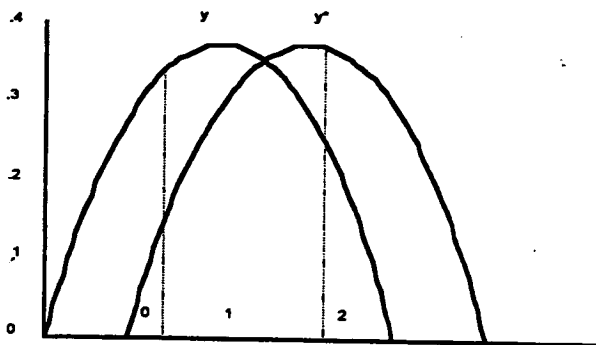


Figure A-1. Effects of change in x on Predicted Probabilities

APPENDIX B
PROBIT AND BINARY LOGIT MODEL ESTIMATION RESULTS

APPENDIX B
PROBIT AND BINARY LOGIT MODEL ESTIMATION RESULTS

Detailed descriptions of the probit and binary logit model estimation results are contained in Chapter 6, Survey Results: Public Feedback.

Table B-1. Ordered Probit Model Estimation Results for Opinions That the Weekend Closures of I-405 Had a Major Impact on Travel Plans

Variable*	Estimated Coefficients	Marginal Effects				
		(y = 0)	(y = 1)	(y = 2)	(y = 3)	(y = 4)
Constant	0.499 (5.64)	-0.1881	0.0156	0.0737	0.0624	0.0364
Age dummy (1 if less than 30, 0 otherwise)	0.255 (1.63)	-0.0961	0.0080	0.0377	0.0319	0.0186
Income dummy (1 if less than \$30,000, 0 otherwise)	-0.383 (-1.11)	0.1442	-0.0119	-0.0565	-0.0478	-0.0279
Education dummy (1 if post graduate, 0 otherwise)	-0.427 (-2.93)	0.1607	-0.0133	-0.0630	-0.0533	-0.0311
Geographic location dummy (1 if living in Seattle, 0 otherwise)	-0.191 (-1.05)	0.0719	-0.0060	-0.0282	-0.0239	-0.0139
Geographic location dummy (1 if living in Bellevue, 0 otherwise)	-0.415 (-2.79)	0.1563	-0.0129	-0.0613	-0.0519	-0.0302
Threshold μ_1	0.881 (12.79)					
Threshold μ_2	1.528 (16.40)					
Threshold μ_3	2.187 (17.00)					
Restricted Log-likelihood	-520.49					
Log-likelihood at convergence	-509.59					
Number of Observations	378					

* Dependent variable is "The weekend closures of I-405 had a major impact on my travel plans", 0:disagree strongly, 1:disagree, 2:neutral, 3:agree, 4:agree strongly.

** t-statistics in parenthesis

Table B-2. Ordered Probit Model Estimation Results for Opinions That the State and the Media Did a Good Job of Making the Public Aware of the I-405 Closures

Variable*	Estimated Coefficients	Marginal Effects				
		(y = 0)	(y = 1)	(y = 2)	(y = 3)	(y = 4)
Constant	2.349 (10.97)	-0.0561	-0.0623	-0.3357	-0.4827	0.9369
Age dummy (1 if 30~54, 0 otherwise)	-0.274 (-2.07)	0.0066	0.0073	0.0392	0.0564	-0.1095
Number of working people in household	0.152 (2.19)	-0.0036	-0.0040	-0.0218	-0.0313	0.0608
Geographic location dummy (1 if living in Bellevue, 0 otherwise)	0.201 (1.23)	-0.0048	-0.0053	-0.0287	-0.0413	0.0801
Geographic location dummy (1 if living in Seattle, 0 otherwise)	-0.389 (-1.88)	0.0093	0.0103	0.0555	0.0799	-0.1550
Geographic location dummy (1 if living in Kirkland, 0 otherwise)	-0.291 (-1.10)	0.0070	0.0077	0.0417	0.0599	-0.1162
Threshold μ_1	0.339 (2.13)					
Threshold μ_2	1.170 (5.74)					
Threshold μ_3	2.400 (11.11)					
Restricted Log-likelihood	-381.88					
Log-likelihood at convergence	-390.47					
Number of Observations	372					

* Dependent variable is "The state and the media did a good job of making the public aware of the I-405 closure", 0:disagree strongly, 1:disagree, 2:neutral, 3:agree, 4:agree strongly.

** t-statistics in parenthesis

Table B-3. Ordered Probit Model Estimation Results for Opinions That Closing Highways Completely For a Weekend Is Better Than Closing a Few Lanes During the Day for Several Days

Variable*	Estimated Coefficients	Marginal Effects				
		(y = 0)	(y = 1)	(y = 2)	(y = 3)	(y = 4)
Constant	1.702 (8.32)	-0.1101	-0.0959	-0.1115	-0.3255	0.6430
Age dummy (1 if 30~54, 0 otherwise)	-0.186 (-1.30)	0.0120	0.0105	0.0122	0.0356	-0.0704
Income dummy (1 if over 50,000, 0 otherwise)	0.174 (1.27)	-0.0112	-0.0098	-0.0114	-0.0332	0.0656
Education dummy (1 if post graduate degree, 0 otherwise)	0.307 (1.70)	-0.0199	-0.0173	-0.0201	-0.0588	0.1162
Number of working people in household	0.132 (1.82)	-0.0085	-0.0074	-0.0086	-0.0252	0.0498
Geographic location dummy (1 if living in Kirkland, 0 otherwise)	-0.389 (-1.68)	0.0251	0.0219	0.0255	-0.0744	0.1469
Geographic location dummy (1 if living in Mercer, 0 otherwise)	-0.633 (-1.75)	0.0409	0.0357	0.0414	0.1210	-0.2390
Threshold μ_1	0.363 (3.60)					
Threshold μ_2	0.675 (5.76)					
Threshold μ_3	1.578 (11.49)					
Restricted Log-likelihood	-378.37					
Log-likelihood at convergence	-370.81					
Number of Observations	372					

* Dependent variable is "Closing highways completely for a weekend is better than closing a few lanes during the day for several days", 0:disagree strongly, 1:disagree, 2:neutral, 3:agree, 4:agree strongly.

** t-statistics in parenthesis

Table B-4. Ordered Probit Model Estimation Results for Opinions That the Weekend Closure of I-405 Had a Significant, Negative Impact on Area Business

Variable*	Estimated Coefficients	Marginal Effects				
		(y = 0)	(y = 1)	(y = 2)	(y = 3)	(y = 4)
Constant	1.163 (7.58)	-0.3024	-0.1601	0.3224	0.0966	0.0435
Age dummy (1 if 30~54, 0 otherwise)	0.216 (1.69)	-0.0561	-0.0297	0.0598	0.0179	0.0081
Education dummy (1 if high school diploma, 0 otherwise)	-0.177 (-1.33)	0.0460	0.0244	-0.0491	-0.0147	-0.0066
Number of household people	-0.099 (-2.23)	0.0259	0.0137	-0.0276	-0.0083	-0.0037
Geographic location dummy (1 if living in Redmond, 0 otherwise)	-0.298 (-1.02)	0.0776	0.0411	-0.0828	-0.0248	-0.0112
Geographic location dummy (1 if living in Bellevue, 0 otherwise)	-0.273 (-1.95)	0.0711	0.0376	-0.0758	-0.0227	-0.0102
Threshold μ_1	0.850 (11.68)					
Threshold μ_2	2.472 (20.57)					
Threshold μ_3	3.100 (17.25)					
Restricted Log-likelihood	-460.61					
Log-likelihood at convergence	-454.06					
Number of Observations	372					

* Dependent variable is "The weekend closure of I-405 had a significant, negative impact on area businesses", 0:disagree strongly, 1:disagree, 2:neutral, 3:agree, 4:agree strongly.

** t-statistics in parenthesis

Table B-5. Multinomial Logit Model Estimation Results of Impacts on Travel Plans by the Weekend Closure of I-405

Variable*	Estimated Coefficients**	Marginal Effects***
Constant	-1.023 (-2.03)	-0.2543
Age dummy (1 if less than 30, 0 otherwise)	0.920 (2.41)	0.2287
Age dummy (1 if equal or over 55, 0 otherwise)	-1.076 (-3.06)	-0.2677
Household Income	0.251 (3.05)	0.0624
Education dummy (1 if college degree, 0 otherwise)	-0.431 (-1.59)	-0.1073
Number of children under age 6	-0.762 (-3.12)	-0.1895
Geographic location dummy (1 if living in Seattle, 0 otherwise)	-0.732 (-1.84)	-0.1821
Geographic location dummy (1 if living in Bellevue, 0 otherwise)	0.428 (1.19)	0.1064
Geographic location dummy (1 if living in Renton, 0 otherwise)	0.704 (1.40)	0.1752
Geographic location dummy (1 if living in Kent, 0 otherwise)	1.497 (2.15)	0.3723
Restricted Log-likelihood	-201.84	
Log-likelihood at convergence	-177.58	
Number of Observations	292	

* Dependent variable is "Did the weekend closure of I-405 affect your travel plans in any way" (1=yes, 0=no).

** t-statistics in parenthesis

*** Partial derivatives of probabilities with respect to the vector of characteristics, are computed at the means of the Xs and all observations are used.

Table B-6. Multinomial Logit Model Estimation Results of Routes Taken Because of the Weekend Closure of I-405

Variable*	Estimated Coefficients**	Marginal Effects***
Constant	0.816 (0.90)	0.1638
Age	-0.036 (-2.41)	-0.0072
Household Income	0.201 (1.79)	0.0405
Education dummy (1 if college degree, 0 otherwise)	-0.943 (-2.64)	-0.1893
Number of children under age 6	-0.832 (-2.91)	-0.1671
Number of operable vehicles	0.294 (1.64)	0.0591
Geographic location dummy (1 if living in Seattle, 0 otherwise)	-0.678 (-1.48)	-0.1362
Geographic location dummy (1 if living in Bellevue, 0 otherwise)	1.797 (2.95)	0.3609
Geographic location dummy (1 if living in Renton, 0 otherwise)	1.209 (1.77)	0.2427
Geographic location dummy (1 if living in Kent, 0 otherwise)	0.877 (1.24)	0.1761
Geographic location dummy (1 if living in Kirkland, 0 otherwise)	0.811 (1.21)	0.1629
Restricted Log-likelihood	-136.46	
Log-likelihood at convergence	-116.10	
Number of Observations	219	

* Dependent variable is "Did you use a route that you would not normally have taken because of the weekend closure of I-405" (1=yes, 0=no).

** t-statistics in parenthesis

*** Partial derivatives of probabilities with respect to the vector of characteristics, are computed at the means of the Xs and all observations are used.

Table B-7. Binary Logit Model Estimation Results of Departure Time Change Because of the Weekend Closure of I-405

Variable*	Estimated Coefficients**	Marginal Effects***
Constant	0.735 (1.92)	0.1778
Marital status (1 if married, 0 otherwise)	-0.402 (-1.25)	-0.0973
Age dummy (1 if equal or over 55, 0 otherwise)	-0.849 (-2.14)	-0.2053
Income dummy (1 if less than 20,000, 0 otherwise)	-0.977 (-1.09)	-0.2363
Income dummy (1 if over 50,000, 0 otherwise)	-0.523 (-1.79)	-0.1264
Number of children aged 6 to 16	0.348 (2.07)	0.0841
Number of operable vehicles	-0.169 (-1.09)	-0.0409
Geographic location dummy (1 if living in Seattle, 0 otherwise)	-0.918 (-2.05)	-0.2221
Restricted Log-likelihood	-173.44	
Log-likelihood at convergence	-160.96	
Number of Observations	255	

* Dependent variable is "Did you change the departure time of any of your trips because of the weekend closure of I-405?" (1=yes, 0=no).

** t-statistics in parenthesis

*** Partial derivatives of probabilities with respect to the vector of characteristics, are computed at the means of the Xs and all observations are used.

Table B-8. Binary Logit Model Estimation Results of Trip Cancellation

Variable*	Estimated Coefficients**	Marginal Effects***
Constant	-1.307 (-1.96)	-0.0847
Marital status (1 if single, 0 otherwise)	0.577 (1.00)	0.0374
Age dummy (1 if less than 30, 0 otherwise)	-1.298 (-1.60)	-0.0841
Education dummy (1 if high school diploma, 0 otherwise)	-0.666 (-1.00)	-0.0432
Number of operable vehicles	-0.483 (-1.67)	-0.0313
Geographic location dummy (1 if living in Renton, 0 otherwise)	1.079 (1.67)	0.0699
Restricted Log-likelihood	-75.02	
Log-likelihood at convergence	-69.58	
Number of Observations	256	

* Dependent variable is "Did you cancel a trip that you would normally have taken because of the weekend closures of I-405" (1=yes, 0=no).

** t-statistics in parenthesis

*** Partial derivatives of probabilities with respect to the vector of characteristics, are computed at the means of the Xs and all observations are used.

Table B-9. Multinomial Logit Model Estimation Results of Change of Shopping Places

Variable*	Estimated Coefficients**	Marginal Effects***
Constant	-2.078 (-2.27)	-0.0978
Gender dummy (1 if gender is male, 0 otherwise)	0.636 (1.18)	0.0299
Marital status (1 if single, 0 otherwise)	-0.908 (-1.25)	-0.0427
Age dummy (1 if less than 30, 0 otherwise)	1.183 (1.90)	0.0557
Education dummy (1 if college degree, 0 otherwise)	0.837 (1.58)	0.0394
Number of people in household	-0.694 (-1.93)	-0.0326
Number of children aged 6 to 16	0.684 (1.36)	0.0322
Geographic location dummy (1 if living in Seattle, 0 otherwise)	-1.301 (-1.17)	-0.0612
Geographic location dummy (1 if living in Bellevue, 0 otherwise)	0.804 (1.39)	0.0379
Restricted Log-likelihood	-67.92	
Log-likelihood at convergence	-60.44	
Number of Observations	259	

* Dependent variable is "Did you shop at different places because of a weekend closures of I-405" (1-yes, 0-no).

** t-statistics in parenthesis

*** Partial derivatives of probabilities with respect to the vector of characteristics, are computed at the means of the Xs and all observations are used.

Table B-10. Multinomial Logit Model Estimation Results of Awareness of the I-405 Closures Before They Happened on August 15-18 or August 22-25.

Variable*	Estimated Coefficients**	Marginal Effects***
Constant	1.634 (1.97)	0.0785
Age dummy (1 if 30-54, 0 otherwise)	-1.015 (-1.89)	-0.0488
Income dummy (1 if over 50,000, 0 otherwise)	-0.562 (-1.21)	-0.0270
Education	0.268 (1.39)	0.0129
Number of working people in household	0.745 (2.65)	0.0358
Geographic location dummy (1 if living in Bellevue, 0 otherwise)	0.920 (1.21)	0.0442
Restricted Log-likelihood	-91.43	
Log-likelihood at convergence	-84.03	
Number of Observations	369	

* Dependent variable is "Were you aware of the I-405 closures before they happened on August 15-18 or August 22-25" (1=yes, 0=no).

** t-statistics in parenthesis

*** Partial derivatives of probabilities with respect to the vector of characteristics, are computed at the means of the Xs and all observations are used.

APPENDIX C
SURVEY FORMS

APPENDIX C.1

Motorist Survey



Washington State
Department of
Transportation



University
of
Washington



Washington State
Transportation
Center

Dear Motorist:

The Washington State Department of Transportation and the Washington State Transportation Center at the University of Washington are working together to gain an understanding of your reaction to the recent weekend closures of I-405 (these closures were made to repave the roadway). The results of this survey will be used to assist the Washington State Department of Transportation in its scheduling of future highway construction projects. Your answers will be confidential (please remove your address label before returning your postage-paid survey). We appreciate your time in completing this survey.

Section A: Impact of the I-405 Closure on Your Travel

1. Were you in the Seattle Area during the weekends of either August 15-18 or August 22-25? Yes No

↳ If no, did you arrange your schedule to be out of the area because of the I-405 weekend closure?

Yes No

If you were not in the Seattle area during the closure go to question 8.

2. Did the weekend closure of I-405 affect your travel plans in any way? Yes No

↳ If no, go to question 8.

3. Did you use a trip route that you would not have normally taken because of the weekend closure of I-405? Yes No

↳ If yes, which of the following routes did you take instead of the closed section of I-405? (check all that apply)

I-5 I-90 SR-520 SR-18 SR-167 SR-169 SR-900 Other

4. Did you change the departure time of any of your trips because of the weekend closure of I-405? Yes No

5. Did you cancel a trip that you would have normally taken because of the weekend closure of I-405? Yes No

↳ If yes, which of the following trip-types did you cancel? (check all that apply)

_____ shopping trip _____ recreational trip _____ other
_____ business trip _____ visiting friends

6. Did you spend less money shopping because of a weekend closure of I-405? Yes No

7. Did you shop at different places because of a weekend closure of I-405? Yes No

Section B: Your Awareness and Opinions on the I-405 Closure

8. Were you aware of the I-405 closures before they happened on August 15-18 or August 22-25? Yes No

↳ If no, go to question 10

9. How did you acquire advanced knowledge of the I-405 closures? (check all that apply)

_____ road signs _____ television _____ other
_____ radio _____ word of mouth _____ Newspaper

10. How do you usually acquire information about traffic conditions when driving in the Puget Sound region? (check all that apply)

_____ road message signs _____ television _____ other
_____ radio _____ word of mouth _____ do not normally seek
_____ newspaper _____ internet _____ inform about traffic conditions

(Please Continue on Next Page)

Section B: Continued

11. Please indicate the extent to which you agree or disagree with the following statements

	Disagree Strongly	Disagree	Neutral	Agree	Agree Strongly
The weekend closures of I-405 had a major impact on my travel plans.	_____	_____	_____	_____	_____
The State and the media did a good job of making the public aware of the I-405 closures.	_____	_____	_____	_____	_____
Closing highways completely for a weekend is better than closing a few lanes during the day for several days.	_____	_____	_____	_____	_____
The weekend closure of I-405 had a significant, negative impact on area businesses.	_____	_____	_____	_____	_____

Section C: About Yourself

12. Are you? male female
13. Are you? married single separated divorced other
14. What is your age? _____
15. What is your approximate annual household income?
 no income \$10,000-\$19,999 \$30,000-\$39,999 \$50,000-\$74,999
 Over \$100,000 under \$10,000 \$20,000-\$29,999 \$40,000-\$49,999 \$75,000-\$100,000
16. What is your highest level of education?
 some high school technical college degree (A.A.) post graduate degree
 high school diploma college degree
17. Including yourself, how many people live in your household? _____
18. How many children in your household are under age 6? _____
19. How many children in your household are aged 6 to 16? _____
20. How many people living in your household work outside the home? _____
21. How many licensed and operable motor vehicles do you have? _____
22. What City do you live in? _____

Comments:

(Thank you)

APPENDIX C.2
State Highway Agency Survey

SURVEY OF HIGHWAY RECONSTRUCTION PRACTICES IN MAJOR METROPOLITAN AREAS

Please answer the following assuming ACP overlay of multi-lane expressways:

- 1) How many major highway reconstruction projects (25,000 tons of paving) have been completed in your state during the last three years? _____
- 2) How many major highway reconstruction projects are slated to begin in your state over the next three years? _____
- 3) Please rank the reconstruction methods below with 1 being the most frequently employed in your state for highway reconstruction. Indicate methods that are not used by placing a zero in the blank.

- _____ single lane closures daytime
- _____ single lane closures nighttime
- _____ single lane closures around the clock (24 hrs)
- _____ multiple lane closures daytime
- _____ multiple lane closures nighttime
- _____ multiple lane closures around the clock
- _____ full lane closures (one direction) daytime
- _____ full lane closures nighttime
- _____ full lane closures around the clock
- _____ other: describe _____

- 4) How have you found construction operations or quality to be affected positively or adversely by the closure method employed most frequently (#1 above) versus other specific methods? Mark all that apply.

Difference with respect to:

- Compaction: Lower average density Greater variability in density
 Higher average density Less variability in density
 No noted difference

Gradation: Greater variability Less variability No noted difference

Longitudinal Joints: Better overall quality Less overall quality No noted difference

Smoothness or Rideability: Better ride Worse ride
 Not measured soon enough after construction

- Work Zone Safety: Higher motorist accident rate Lower motorist accident rate
 Higher worker accident rate Lower worker accident rate
 No noted difference

- “Cyclic Segregation”, Truck Fans, etc: Higher rate of occurrence
 Lower rate of occurrence
 No noted difference
 Not a problem due to _____

- Cost: Higher pay factors associated with _____
 Lower pay factors associated with _____
 No noted difference

- Hourly Production Rates: Higher average rates Lower average rates
 Greater variability No noted difference
 Less variability

- Public Reaction/Impact: Motorists adjust well with little complaint
 Businesses prefer
 Mostly negative feedback received
 Mostly positive feedback received
 Higher traffic incident rate on alternate routes

5) Is your SHA considering specific alternative approaches, with respect to lane closure, time of day, etc., to deal more effectively with current highway reconstruction constraints? If so, please describe. _____

Thank you for your contribution to this study!

APPENDIX D
COMMENTS FROM MOTORISTS

ID Number	COMMENTS
2	Great way to go!
4	I405 always has work done on it. Improvements have been happening for the last 15 years. State union employees never work, they all stand around and watch someone else. "They" are too many chiefs and no indians.
17	It proves that road repairs can be done in an expeditious manner, instead of extended periods of time.
18	Close I-5 by Tukwila on any weekend to resurface the added lane.
20	I wish this would be the way all road construction would be done. A short inconvenience, such as a weekend, is much better than months or weeks of inconvenience. I have traveled I405 since construction-great job!
21	When it comes to traffic repairs in this area, quick is most painless. While I don't use I405 often, I would prefer the same weekend closure approach on 520 which I drive daily.
22	The closure went smoother than I expected.
26	I work in Woodinville and travel I405 daily and to me the closure was great way to get the work done.
29	Weekend closure is the best idea that has happened in years.
30	Do this more!!
31	I rarely go to the Eastside so the closure wouldn't have affected me even had I been in town.
32	If it saves money and the end product (i.e., quality of the paving) is better I'm all for closing down for the weekend.
35	For the weekend closure, I strongly recommend the quality of road surface is far better than several pavements, safer for transportation crew. I like this idea. Eventually, I think less patches will be required in downstream maintenance.
37	Yes, it was necessary for our normal 405 travel to be rerouted, but with the advanced warning from the media, we were able to plan accordingly. I think the weekend closure was a good idea and saved many headaches, accidents, delays during the week.
38	I like the idea of official concern by technically responsible planners.
45	Closing the freeway for the weekend was a great idea and saved a lot of commuting frustration on following weekdays.
47	Closed highway is best method.
51	I would have gone an alternative route when 405 closed, much better a short inconvenience than dragging out road repairs.
52	Bit of a problem coming home from a concert. Not a big problem! My son uses that route to work-was better for him.
57	I think it should be done as quickly as possible. Time is of essence.
58	Please do more road work like this. I felt it had no negative impacts.
61	Finish the I5 Tukwila S-curve project that has had terrible surface for 2 years close it for 3 weeks if needed, but get it done.
62	I drove I405 yesterday southbound, looks and feels like they did a good job.

63	Closure on weekends are best! Wish it would happen in southbound. Also after 10:30 p.m. is good.
65	Delivery service-which I do on weekend- was greatly effected.
66	I feel it worked out well closing 405 on the weekend. It would have been very difficult to close during the week or 4 or 2 lanes at a time-more negative impact.
69	Your overhead electronic signs are worthless. Drivers slow to read them and create traffic slow downs unnecessarily.
70	Great job-look at highway 18-start at Everett and at Ft.lewis, with exits to new port hills, Renton, Kent, exits.
73	After commuting to Kent for 2 years of construction, I fully approve of weekend closure.
76	I think that the work should be done during the evening hours to early morning (10:00 p.m. -5:00 am).
77	I feel that too many commuters were inconvenienced by the lane closures. In the future, I believe that weekend closure are much more effective. Remember that our tax dollars are paying for these road improvements and the constructions crew need to work.
80	I commute everyday to the eastside but usually in the a.m. I go I5 and I90 to get to work, evening 7:00-8:00 p.m. usually I405 south from I90. During the day time it is bad on our freeways but what can you do when we advertise this is the best city to live
81	Seattle needs a third bridge over Lake Washington.
84	Please do road work all after Puget Sound as quickly as can be scheduled. That is, don't drag out work over a whole year.
87	I think DOT did a great job. I had plenty of warning and planned accordingly. I have relatives in Auburn and just went to visit the weekend before the closures.
88	Any improvement of roads is worth any number of delays or closures.
89	Although the closure was a chunk out of the middle of my commute, I much preferred being inconvenienced for 2 weekends than months on end. The new surface is very nice to drive on. It makes my car (30 yr. old VW bug) feel like driving a luxury car.
91	Weekend closure is a good idea to save big \$\$ and get it all done in one fell swoop!
93	Closures are a good idea - Keep it up!
98	I don't travel (usually) that far south I405 Factor. Hwy. 169 to do business from Woodinville. I usually go to Bellevue or Seattle.
99	Hope you won't do this again.
100	If I had needed to go out, it would not be a big deal to use another route for the weekend or any other time.
102	The paving job on I405 north and south was the best and most professional I've seen anywhere in the world. My compliments to everyone involved. Keep up the good work. Thank you very much!
104	I personally would rather the weekend closure if the tax payers realize savings and the continual on again off again closure of one or two lanes, that affect my commute and off hour travel info.
105	I think it went really well.
106	I felt sorry for all the out of town people trying to get through without detour signs.
108	Great Idea-allows people to plan ahead.


116	With the amount of traffic on I405, I would get rid of the carpool lane, it doesn't seem to help out the traffic situation, and the amount of traffic on a 2 lane doesn't work.
119	I believe that weekend road closure is the best way to ease traffic problems during the weekdays. Thank you for asking my opinion.
120	I found I was inconvenienced much less by having I405 closed all weekend than during the week everyday. This system was much more efficient
121	I object to the use of road message signs for non-emergency messages. They distract drivers and increase risk of accidents.
124	What I dislike the most are surprises, for example coming upon lane closures (and resulting slow traffic) without warning. I was aware of the I405 closures ahead of time and was able to easily use alternate routes.
127	I feel this was a good decision to get a big job done quicker and cost effective. I would support this method over long delays on other highway projects.
130	HOV lanes should be eliminated. They are underutilized.
133	2 people lane in Bellevue, work in Tukwila-the single lane closures during weekdays, even on evenings, have been a real headache, we appreciate your creative approach to the situation.
141	Had I got caught-up in the I405 mess, I would have been extremely pissed off because of lack of notification.
142	Excellent and efficient job done on the I405, keep up the good work.
152	As a owner of a major regional retail business that draws 30-50% of its business from the eastside, closures had a major negative impact on our sales.
156	I personally think by closing the construction site completely for a weekend is very time and cost effective for such a large scale project. I would like to see more of that happening.
161	Very good. Gave me enough time to prepare for the closing.
167	Excellent job! Well done! I travel to the airport and love the new stretches of freeway. We are very impressed with the length completed during the short closure. A little hardship is definitely worth the results.
168	I needed to be at Sea-Tac airport to pick up arriving passenger and drove I90 to I5 and the Mariners game let out at the same time and caused extreme delays on southbound I5 (I would have usually taken I405 route)
169	Would have preferred to have both sides of the freeway closed at the same time so only one weekend would have been impacted.
171	It seems remarkably short-sighted not to have added a lane during all the summer work that was being done! You repaved (and it needed it) but did very little to actually help the stress of the I405 commute.
174	I appreciate the states' innovative approach to handling I405. The I405 late morning to early afternoon lane closures are so unpredictable and aggravating (over the last months) that two little weekends of planning road trips in truly insignificant.
175	Most of my highway traveling is up the I5 corridor. A closure of that highway would have a far more significant impact on me.
184	I commute everyday to Issaquah using SR520 and I405 and I90. I experienced no difficulty. The commute was also on Saturday and Sunday.
185	I thought this was a great idea!! I heartily approve.

187	Don't "toll" the proposed narrow bridge.
195	The closure was a great idea. Having a large area paved all at once saves money that we pay and a lot of hassle for further congestion.
196	Some section of road, without reasonable bypass, should not be closed.
198	I am disappointed in the end result of I405. Traffic is no better now than before the work accomplished. Same configuration. Why keep transit lanes restricted during the entire day? Why not hours of restriction 6-9 a.m. and 4-7 p.m. I know you are against
199	I support the closure fully. A summer of I405 congestion during road work was hell. I applaud the closure as innovative and a relief.
201	For 5 years, there is ongoing work on this highway(SR167). Since this massive work began, the traffic conditions are most often worse than before. The effect is that of pouring concrete down a drain-I would like to see those funds used for enhancing light.
205	Why don't they schedule night time work on these major roads that need accessibility during the day? It seems that the State transportation could do a better job with the resources available. Use temporarily high light!
212	Great job on low impact process at I405.
215	We live just above I405 in Newport Hills. Although we were somewhat affected by construction noise we strongly agree with the weekend approach to get the job done and over in the space of two weekends.
218	Closing highway is better for safety than closing one lane at a time. However, you continue to close I405 one lane at a time.
220	As long as I have sufficient lead time, I plan activities, route, etc., accordingly.
228	The close it and finish it concept is far superior to partial closure. Made a drive on 8-1-97 north on I405 during partial closures in that was a nightmare of people cutting in and around at all opportunities. Traffic moved well during the total closure.
233	If I were in the area during that time instead of on vacation, the closure would have had adverse impacts on my normal transportation plans.
237	This closure did not affect me much- closing I405 north of Coal Creek parkway probably would cause me to leave town for the weekend.
238	Coordinating construction hours during the evening(10p.m. later) also contributes to fewer traffic problems during prime time traffic hours.
239	Excellent idea rather than tie up the roads for several weeks.
243	We think the closure of I405 was an excellent idea and should be done again.
248	#11-3 is "agree" if it was worded "...closing a few lanes during the day for several months" versus completely for a weekend. The traffic congestion on Coal Creek parkway wasn't as bad as expected.
250	Continue road repairs using complete road closure method-more efficient-saves tax dollars and on the whole is less disruptive.
251	Keep lanes open during weekdays, and if needed, close road for entire weekend and be done with it!
252	Financially it makes sense. Impacts on travel is less. Why are we not doing this more often?
256	Have moved from Renton to Gig Harbor and no longer use I405 regularly?
258	Smartest thing the WSDOT has ever done. Do all road projects like this.

259	I think the DOT had done an excellent job to go ahead with this arrangement without consulting the general public's opinion, from time to time we need leadership like this to get the job done promptly. Everytime since, I traveled on I405.
260	Is this approach used on other than freeway? If not, it may be worth considering.
261	What can you do about the traffic tie-ups on I5 through Everett? I hope the I405 mess through Bothell gets completed soon. I much prefer a short total closure than the long range traffic problems like the 2 listed above.
264	Stayed w/in Seattle city limits and avoided I5 during I405 closure-kept to arterials and side streets.
266	We need more patrols in the construction area to protect the workers. Good job keep up the good work.
269	Interesting to have an impact survey perhaps it should be done more until adequate data base is established.
272	Much prefer closing a highway and getting the job done. Partial lane reduction in several weeks while a job is done creates a much larger negative impacts.
276	I think it was a good idea, it may not work as well on I5 but the advance warning and availability of other routes makes it a better choice than driving through unexpected(unprepared for) traffic delays caused by construction.
282	I travel I405 nearly everyday and I thoroughly appreciate the work done and the way it was done- I would rather make alternate plans for 2 days than be stuck in traffic for months! Thank you!
287	My business takes me north on I405 from I90. Had this been closed, I would have been affected and feel differently.
289	Before the county or cities allow multi-zoned buildings(apartments etc.) to be built why not improve the roads for adequate travel.
300	#15 this is question is offensive to me. It is none of your business what my income is- Also has nothing to do with this the subject.
301	It appears to me that closing for a weekend is more productive to the contractor and less problem to motorist.
303	I wonder how many accidents have happened? I5 is very dangerous during these repairs taking place, its too bad it couldn't be done like I405!
307	Continue with this type of weekend closures when appropriate.
308	I commute from Graham to Bellevue 5 days a week. I think this idea could be used on the highway 167 to speed up the completion of the carpool lane. The traffic in the valley is horrendous.
309	Weekend closures are the way to do it!
311	As long as there is enough prior knowledge, road work; as you had done it; should not be much if any problem at all! Thanks for trying something new!!
312	Work's for contractor that closed I405.
314	Thanks for the survey.
315	I405 has been a pain road. It will be nice to have it completed.
319	It was a great idea to close the road for the work-while a bit of inconvenience, it was limited. Congratulations!

322	#11-3 "Closing highways completely for a weekend is better than closing a few lanes". This depends on the possibility of alternative routes to major areas. In the case of I405, there were many alternative routes. Maps with the alternative routes could be
323	I think the transportation department did a wonderful job on I405.
329	This was a good way to go; Do it during the weekend and finish a section! Lane closures during the work week should be avoided.
330	If you wanted this back by the 15th, should have sent it out earlier mine arrived on the 12th!
331	Would have been nice to know more about what work would be accomplished during the closure. When will traffic sensors and cameras be activated.
332	I tried to avoid traveling to work in Renton but had to go in on the 24th for a few hours.
337	I think it is much better to shut down the freeway for a weekend other than a lane per day.
343	When I worked in the Middle East, they had similar road problem as here. Heavy trucks had to be off the road at peak commuter times. This reduced a lot of fatal accidents and kept traffic flowing more safety. I notice many heavy vehicle with no side impact
346	#11, I would rather be complaining about 4 days of "chaos" than several weeks. This is what I have been saying for years, should happen to reduce dollars and spending "chaos" to the public.
347	The traffic problems need to be addressed.
349	It's a lot easier to take I5 for a weekend than to have lanes closed during the week.
350	I often visit family in Bellevue and Kirkland, but because of advanced information did not go up there. I think you are finally on a grand idea and have heard good from others.
353	I'd rather have major highways closed on the weekends and fixed than a few days during the week.
354	Great idea-much more cost effective to the average commuter. No time lost in commuting. Do it again!
357	Forgot freeway was closed. Took a trip to the airport, no delay southbound open. Took alternate route to return home. Minor inconvenience.
361	The weekend closures were the best idea yet! The new road is great and complete in a couple weekend. All road work should be done this way!
362	Please fill potholes, also-the steel plates are very dangerous near Bothell-you need to almost stop(like a speed bump) or risk front end damage or bending your wheels.
365	Cellular phone traffic line and WEB page are excellent sources of info. and help a lot in re-routing my commute when necessary.
370	I work in South Seattle and travel I405 daily-I liked the way they used the weekend for repairs!
371	Great job of informing public in advance.
372	Do it again on I5 in Everett!!
376	This is a loaded question. The major work up until that time was done at night. That is preferable to either choice above. It did not result in a mitigation of future impacts as you are still closing lanes down to do work that should have been done at that same time. To close the whole thing down to do the edges was plain silly unless you were going to repave overpasses(which are still in their original bad condition) or do all remaining work.

APPENDIX E
SR 405 MAINLINE OVERLAY REPORT

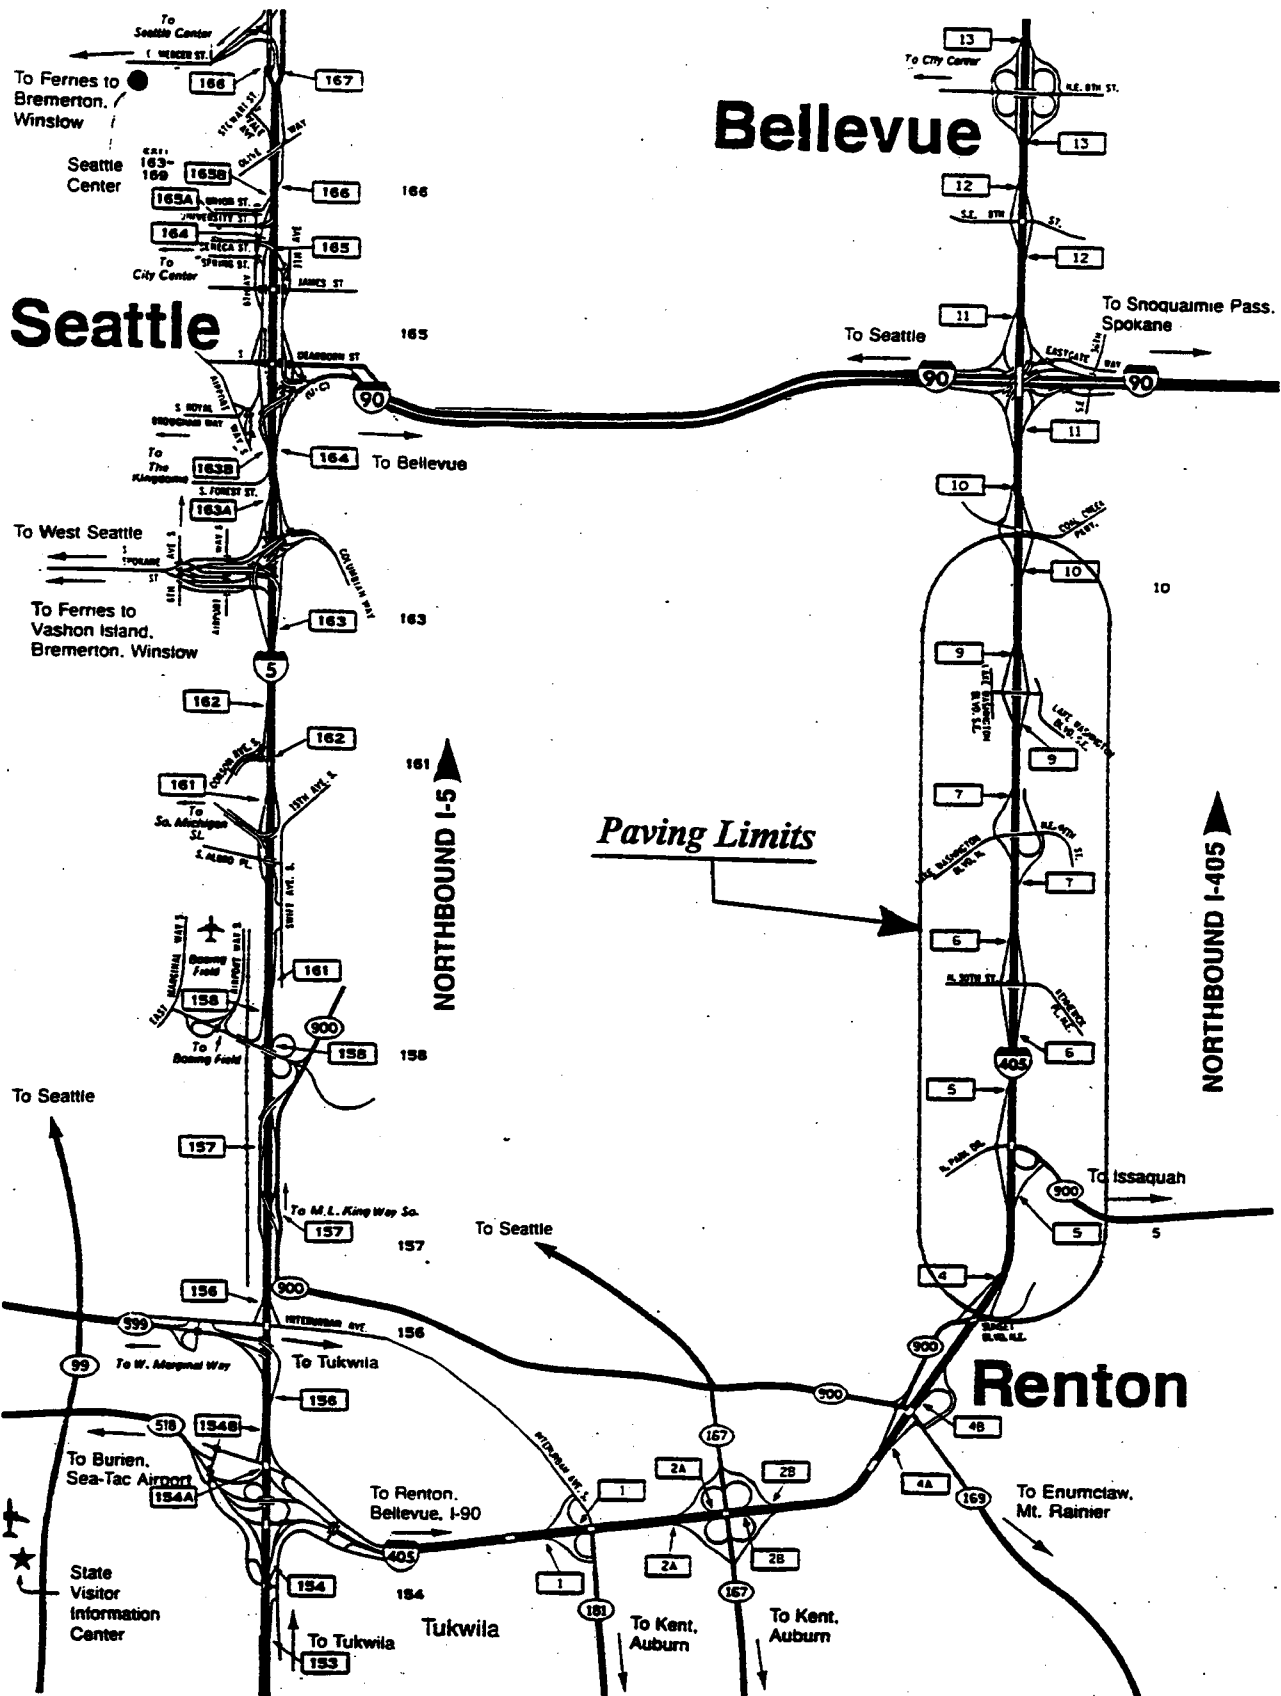

FINAL DRAFT 8/4/97

METHODOLOGY

Historically, pavement overlays constructed in congested urban areas are constructed at night with a series of nighttime lane closures. This process tends to be inefficient and subjects the public to construction inconveniences and hazards over a long period of time. In an attempt to provide a superior end product with less overall impact to the traveling public, WSDOT is planning to construct the SR405 overlay during two separate weekend closures, thus shortening the paving duration by an entire construction season.

CONTRACT PLAN INFO AND CHANGES

ROADWAY SECTIONS

There have been numerous changes to the Contract roadway sections, all of which have been previously distributed to the Contractor (See *Appendix A*). The only further change is that the overlay will be constructed to the toe of all of the existing precast concrete barrier on the job, with the exception of the widenings of the SB 44th onramp, the SB Park onramp, and the NB 30th onramp. The final lift under the barriers on the aforementioned ramps will be paved prior to resetting the barrier in its final configuration. At all other locations on the job, the precast barrier will not be moved for the sole purpose of constructing the overlay underneath of it since there would not be enough time during the weekend closure to remove and reset the barrier.

PIVOT POINTS

As shown on the Contract roadway sections, the existing roadway has a pivot point at the HOV lane stripe between the inside and middle lanes. This pivot point occurs on both the northbound and southbound roadways. Also, the roadway sections show that this pivot point location moves transversely into the middle lane by as much as four feet. There is nothing in the Contract that shows at which stations this variation in pivot point location occurs. After conducting a field survey of existing pivot point location, it was found that in most areas the pivot point lies within a couple of feet of the HOV lane stripe. Prior to preleveling, the channelization will be placed into its final configuration. The prelevel will be used to make minor lateral shifts in the pivot point so that it lies directly on the HOV lane stripe between the inside and middle lanes.

There are a couple of areas where the pivot point lies a considerable distance from the HOV lane stripe. There was initial concern that re-establishing the pivot point at the HOV stripe in these areas would leave a substantial lip between the two lanes, causing a traffic hazard if the HOV lane and the middle lane were not preleveled in the same work shift. Since the weekend lane closure hours have been extended to accommodate the installation of the preleveling, it will not be a problem to pave both lanes during the same work shift, so it is no longer an issue.

Also, the Contractor is concerned that there is another break point location in addition to the pivot point. The median widening in these areas was constructed to the superelevations shown in the Contract Plans, which did not necessarily match the existing superelevations of the adjacent HOV lane. This has caused a break point to occur at the median widening joint. This is a concern in areas where the break point lies less than 10' away from the median barrier since the standard paving machine will not be able to fit between the barrier and the break point. In order to overlay these areas, a different paving procedure would have to be used, possibly including extensive hand work.

FINAL DRAFT 8/4/97

Since hand work would put the overlay completion time in jeopardy, this break point will be eliminated in one of two ways. Primarily, the median widening will be overlaid with the preleveling course at the same superelevation as the adjacent HOV lane. In areas where this would cause the paving to extend too high up onto the median barrier, the break point will be planed out instead.

SUPERELEVATIONS

The actual existing roadway superelevations differ from those shown in the Contract to varying degrees. Since the intent of the overlay is roadway preservation instead of roadway reconstruction, the superelevations shown in the Contract are to be ignored for overlay purposes. The new overlay will be installed by paving constant depth over the existing and widened roadways.

PREPARATORY WORK ACTIVITIES

CRACK SEALING AND PAVEMENT REPAIR

The Contract Special Provisions give general areas where crack sealing and pavement repair are likely to be needed. WSDOT has since conducted a detailed review of the overlay limits, and has produced a summary sheet showing the approximate location and extent of crack sealing and pavement repair areas (see *Appendix B*). A copy of the actual detailed field survey sheets has been made and given to the Contractor for their reference. The field survey sheets show approximate crack sealing and pavement repair quantities every 50 LF of every lane in both roadway directions. This is intended to provide the Contractor with a general scope and approximate location of the repairs that will be required, but is not intended to be all inclusive as pavement conditions could change over the months prior to actual overlay construction.

After the Contractor has had a chance to review the provided information, WSDOT and the Contractor will discuss and come to an agreement on the necessary personnel and equipment to perform the work. When the Contractor wishes to perform the repairs, WSDOT will paint the actual repair areas in the field prior to the Contractor performing the work.

PLANING IN LIEU OF PAVEMENT REPAIR

After the first few days of repairing pavement, it was concluded that the majority of the areas showing major distress did not extend all the way through the pavement section. Instead, the distress has been caused by the delamination of the previous overlay, leaving the underlying pavement in good condition. Therefore, the majority of the pavement repair was conducted by removing the delaminated upper asphalt lift (0.35' depth) and replacing it with new ACP Class "A". This removal was accomplished with a small planer called a 'zipper' which was attached to a front-end loader. After removing the upper ACP, the underlying ACP was evaluated for distress. If distress was noticed, then the pavement was repaired to full depth.

FINAL DRAFT 8/4/97

PRELEVEL

The entire width of the traveled lanes will be preleveled with a minimum 0.06' depth of asphalt concrete pavement Class G, with additional depth used to fill the ruts in the wheel tracks. At the roadway edge stripes, the prelevel course will begin tapering down to zero depth over a width of 2 feet. Primarily, this shoulder and median tapering will be done to reduce the total height that the overlay will come up on the existing and the new traffic barriers. In addition, the prelevel course will be used to shift the pivot point slightly to match the location of the new HOV lane stripe.

Contract plan quantity for ACP Class G for prelevel is 18,518 Tons. A brief survey of actual field conditions and existing rut depth indicate that the quantity used will probably be closer to 15,000 Tons.

PLANING

Planing will be accomplished at all locations shown on the Contract paving plans unless otherwise noted in the body of this report or as modified by previous Change Order.

BRIDGE REHABILITATION**BR405/23 (PARK AVE)**

Bridge 405/23 will not be included in the overlay limits, nor will it receive any prelevel, pavement repair, joint repair, or cracksealing. This is consistent with the Contract roadway sections and with the Contract paving plans.

BR405/25 (MAY CREEK)

The Contract roadway sections do not address the limits of this bridge deck. However, the Contract paving plans show that the project overlay is continuous over the existing deck with no indicated planing of the existing deck overlay. The existing bridge deck will not support the dead load of an additional 0.15' depth of ACP. Therefore, the existing deck overlay will be planed down 0.08'. This planing depth will taper down to 0.00' over a distance of 50 LF beyond each of the end piers. The existing deck will then be overlaid with 0.12' of ACP Class A. The overlay will transition from a 0.12' depth up to a 0.15' depth starting at the end piers and ending at the grinding limits 50 LF away from the end piers where it will match into the 0.15' deep mainline overlay.

The overlay of the new widened bridge deck will match the final overlay depth (combination of existing ACP and new ACP) on the adjacent existing deck at the widening joint. The overlay will then transition to a consistent 0.19' depth at the toe of the western barrier. The waterproof membrane on the new widening will be deleted. All of these changes and clarifications concerning the BR405/25 deck overlay have been presented in a Change Order.

BR405/30 (COAL CREEK PARKWAY)

The Contract shows that the project overlay ends at the southern pier of this bridge via a planed butt joint. This butt joint shall be installed per plan. In addition, the top 0.08' of the existing ACP overlay on the bridge deck shall be planed off. Planing any deeper would put the waterproof membrane in jeopardy. Afterwards, an 0.08' depth of Asphalt Concrete Pavement Class G shall be placed over the entire bridge deck. This will result in no net increase in overlay depth compared to existing, which will eliminate any need to raise the interior expansion joints. This work does not have to be done during the main overlay weekends. This added work is addressed in a Change Order and is being performed in reaction to numerous citizen complaints regarding the rutted condition of the existing deck overlay.

FINAL DRAFT 8/4/97

TRAFFIC DATA LOOPS

Per Standard Specification 8-20.3(14)C, all mainline and ramp traffic data loops falling within the overlay limits shall be installed after roadway grinding and prior to construction of the final wearing course. Primarily, the Contractor has chosen to install the loops prior to installation of the preleveling course as well.

MATERIAL STOCKPILING AND PRE-APPROVAL

It was mutually agreed that the Contractor would provide dedicated aggregate stockpiles for the sole purpose of constructing the overlay. Once the Contractor has built the stockpiles, they will notify WSDOT, who will in turn test the stockpiles for specification compliance prior to the weekend closures. The Contractor should provide the stockpiles for testing at least 3 weeks prior to the weekend closure so as to allow sufficient time for testing and correction of any discovered deficiencies.

ADVANCE PUBLIC NOTIFICATION**ADVANCE NOTIFICATION SIGNS (FIXED MESSAGE)**

WSDOT has provided a design for the mainline and the ramp advance notification signs (See *Appendix C*). There will be 4 mainline signs (2 each direction), and 15 ramp signs (7 for the southbound closure and 8 for the northbound closure). The Contractor will fabricate the signs and install them at locations staked by the Engineer. Payment to the Contractor for these signs will be by force account as provided for under Change Order #8.

The advance notification signs will be installed 11 days prior to the corresponding weekend closure and will remain up throughout the closure period. The Contractor will attach blank placards to the face of each sign after the closure has actually begun. These placards will cover up the "will be" portion of the "will be closed" message so that the sign will simply say "closed" with the appropriate dates and limits.

ADVANCE NOTIFICATION SIGNS (VMS/HAR)

The Construction Traffic Section of WSDOT NW Region has provided maps showing the locations of all of the permanent VMS and HAR signs that will be used for advance notification before and during the weekend closures (See *Appendix D*). Also shown on these maps are locations where portable VMS and HAR signs are to be placed. All portable units will be provided, placed, and maintained by WSDOT Maintenance. The VMS and HAR signs will be put into service 11 days in advance of the appropriate weekend closures.

PRESS RELEASES

WSDOT has provided the media with preliminary notification of the roadway closures at a press conference held at the NW Region office on April 17, 1997. The NW Region Construction Traffic Public Information Officer will provide additional press release and media notification information 11 days prior to the beginning of the weekend closures.

PUBLIC AGENCY NOTIFICATION LETTERS

Per Contract, the Contractor will send public agency notification letters to the agencies listed in the "Traffic Control" Special Provision. The agencies to be notified include Washington State Patrol, Metro and other affected transportation companies, local school districts, and local emergency agencies (fire, police, etc.). The letters are to be sent one month prior to beginning the weekend closures.

FINAL DRAFT 8/4/97

NOTIFICATION PROCEDURE IN CASE OF WEATHER CONTINGENCY

Per Contract, weather delays will be decided at 3 PM of the Thursday preceding the weekend closure. The decision will be made jointly by WSDOT and the Contractor. If a weather postponement is decided, then WSDOT Maintenance will go to each portable VMS and portable HAR sign and change the message to notify the public of the delay. The WSDOT Project Office will notify the TSMC center so that they can change the message on the permanent VMS and HAR signs. The Project Office will also notify the NW Region Construction Traffic Public Information Officer, who will in turn notify the media. The Contractor will install "weather delay" plaques on the fixed message advance notification signs. All of the above actions will be performed prior to the end of Thursday's work shift. The Contractor will also be responsible for immediately reissuing the public agency notification letters with the new weather contingency dates.

OVERLAY ACTIVITIES

PLANNED DATES / WEATHER CONTINGENCY DATES

The weekends for constructing the overlay are as follows:

Close and Overlay Southbound Lanes	8:00 PM August 15 to 5:00 AM August 18
Close and Overlay Northbound Lanes	8:00 PM August 22 to 5:00 AM August 25
Weather Contingency for Southbound Lanes	8:00 PM September 12 to 5:00 AM September 15
Weather Contingency for Northbound Lanes	8:00 PM September 19 to 5:00 AM September 22

PAVING LIMITS AND QUANTITIES

The overlay will be constructed to the limits shown on the Contract paving plans. In addition, the ramp overlay limits will be extended to included the entire length of all of the ramps. Due to the increased ramp paving quantities, WSDOT will allow the ramps to be paved either prior to or after the mainline overlay weekends.

The approximate planned and added overlay quantities at this time are as follows. For a more detailed breakdown, refer to *Appendix E*.

Southbound (mainline)	16,990 Tons	Northbound (mainline)	17,776 Tons
Southbound (ramps-planned)	2,518 Tons	Northbound (ramps-planned)	2,611 Tons
Southbound (ramps-added)	1,424 Tons	Northbound (ramps-added)	1,626 Tons
Southbound (total)	20,932 Tons	Northbound (total)	22,013 Tons

EQUIPMENT AND WORK METHODS

The Contract requires that the Contractor provide a paving plan that includes a comprehensive list of operational and backup equipment as well as indicating how the work will be staged. The Contractor has provided this information to WSDOT (*see Appendix F*). It is important to note that the Contractor has gained permission to set up their mobile rotary drum plant in Boeing parking lot #6, which is 1/4 mile from the Park Ave ramps. This plant will be the sole source of mix for the overlay. If the plant breaks down, mix will have to be trucked in from the Tukwila or Auburn plants until the portable plant is repaired.

FINAL DRAFT 8/4/97

INSPECTION**CONTRACTOR'S QUALITY ASSURANCE**

The Contractor will have their own quality assurance testers on site to monitor compliance with the compaction specifications. The Contractor will provide WSDOT with a preferred coordination procedure between their testers and WSDOT testers.

WSDOT

WSDOT will provide materials testers to monitor compaction efforts per the Contract requirements. The Contractor has requested that rolling patterns be performed. The Contractor has submitted their paving plan and indicated their rolling train equipment. The equipment and work method is acceptable, so WSDOT has agreed to conduct the rolling pattern.

TRAFFIC CONTROL**ROADWAY CLOSURE**

WSDOT Maintenance will provide all roadway closures and traffic control except that which is necessary to implement Contractor haul routes. WSP will monitor the mainline closure points to ensure public compliance. City of Renton off-duty police officers will assist with flagging through the signalized intersections at Park Ave & 8th as well as at Park Ave & Southbound SR405.

The southbound SR405 mainline closure will begin far enough in advance of SR90 that traffic will be down to one through lane for access to Coal Creek Parkway by the time traffic reaches the exit to SR90. The one through lane will be signed as local access only. At Coal Creek Parkway, the roadway will be totally closed, and all traffic will have to exit. The westbound SR90 ramp to southbound SR405 will remain open to traffic and be signed as local access only. Similarly, the eastbound SR90 ramp to southbound SR405 will remain open and be signed as local access only.

The Northbound SR405 mainline closure will begin far enough in advance of SR167 that traffic will be down to one lane which will be shifted onto the collector-distributor ramp. From that point, traffic can either exit onto SR167 or proceed on to SR169. The traffic proceeding to SR169 will be relegated to the right lane only, which will be signed as local access to SR169. AT SR169, all traffic will have to exit. The northbound SR167 ramp to northbound SR405 will be closed to all traffic. The southbound SR167 ramp to northbound SR405 will also be closed to all traffic.

SITE ACCESS

The Contractor will provide a plan or procedure (such as an ID tag or vehicle window sign) as to how authorized Contractor, WSDOT, and UW personnel are to be allowed access to the job site. WSDOT Maintenance will be present at each mainline and ramp closure point, and will not allow anyone access to the job site unless they comply with the approved plan or procedure. (see Appendix G)

HAUL ROUTES

Southbound Paving : Truck traffic will exit Boeing parking lot #6 headed west on 8th, then turn north on Garden. At Park Ave, trucks will turn east and get onto SR405 via the southbound on ramp. Trucks headed back to the plant will exit SR405 via the same ramp, with a uniformed officer controlling traffic at the bottom of the ramp at Park Ave. The trucks will then proceed west on Park Ave, and turn east on 8th, ending back at Boeing parking lot #6. Paving from Park Ave to Sunset will use the southbound off ramp for access instead of the southbound on ramp (See Appendix F).

FINAL DRAFT 8/4/97

Northbound Paving: The route is the same as that for Southbound Paving (see above) with the exception that the trucks will enter and leave SR405 via the northbound off ramp. Paving from Park Ave to Sunset will use the northbound on ramp for access instead of the northbound off ramp. (See Appendix F).

EMERGENCY ACCESS PLAN

Per Contract, the Contractor has provided an emergency vehicle access plan. This plan will ensure safe access to emergency vehicles requesting access to the job site (See Appendix H).

UW RESEARCH STUDY

The University of Washington will conduct a federally funded research study to determine the costs and benefits of construction under a total roadway closure as compared to the historical method of numerous nighttime closures. They will have research teams in the field during construction in order to accumulate information regarding traffic impacts, economic impacts, construction productivity, end product quality, and safety, all of which will be assembled into a final report. This report will help WSDOT determine if total roadway closures are more beneficial than frequent nighttime closures and will have a significant impact on how construction of this nature is handled in the future.

APPENDIX F
MEDIA COVERAGE

48 TV News Stories in Six Days

Prepared 8/19/97 by Tempo IV/Seattle

Report Range: 8/11/97 - 8/18/97

Phone (206) 822-1821

Report Topics: WSDOTD.O.T.\Dept. of Transp.\Department of Transportation

Fax: (206) 889-1452

Program	Clip Type	Time in Length	Description
<u>Monday, August 11, 1997</u>			
SEATTLE			
4 KOMO			
5:00 PM	Anchor Read	00:37:48/ 11:11:28	I-405 to be closed this weekend for repaving
Segment of NEWS			
<u>Wednesday, August 13, 1997</u>			
SEATTLE			
4 KOMO			
5:30 PM	Multiple Format	01:34:45/ 00:02:58	I-405 to close over weekend with no detour
Segment of NEWS			
11:00 PM	Multiple Format	01:11:30/ 00:01:08	I-5 closing 2 lanes for repaving/ I-405 closing due to repaving...Int: Official
Segment of LATE NEWS			
5 KING			
5:00 PM	Voice Over	0:21:11/ 00:00:24	I-405 closed over weekend
Segment of NEWS			
7 KIRO			
5:00 PM	Multiple Format	00:21:40/ 00:01:22	Traffic on 405 will get worse with temporary closings
Segment of NEWS			
6:30 PM	Voice Over	01:45:52/ 00:00:28	Section of 405 will be closed
Segment of NEWS			
<u>Thursday, August 14, 1997</u>			
NORTHWEST REGION			
35 NWCN			
7:00 PM	Voice Over	01:38:38/ 00:00:24	I-405 southbound lanes to close for weekend
Segment of NEWS			
SEATTLE			
4 KOMO			
11:00 AM	Anchor Read	00:08:12/ 00:00:35	Closure on 405 near Renton
Segment of MIDDAY NEWS			
5:00 PM	Anchor Read	00:37:35/ 00:00:30	I-405 southbound lanes closed over weekend
Segment of NEWS			
11:00 PM	Anchor Read	01:20:14/ 00:00:48	Work crews to repair Alaska Way Viaduct this weekend/I-405 to close southbound lanes this weekend
Segment of LATE NEWS			

Program	Clip Type	Time in Length	Description
5 KING			
12:00 PM	Multiple Format	00:03:35/ 00:01:24	405 will be closed during this weekend for construction..Int: Kim Henry, DOT
Segment of NOON NEWS			
6:00 PM	Multiple Format	00:21:08/ 00:02:08	I-405 closed southbound this weekend
Segment of NEWS			
Int: Kim Henry, Dept. of Transportation			
TACOMA			
11 KSTW			
10:00 PM	Multiple Format	00:21:14/ 00:01:01	I-405 closure...Int: Kim Henry, Project Engineer
Segment of LATE NEWS			
<u>Friday, August 15, 1997</u>			
NORTHWEST REGION			
35 NWCN			
7:00 PM	Multiple Format	00:41:12/ 00:00:37	Traffic woes: I-405 to close for weekend
Segment of NEWS			
Int: Bill Southern, Dept. of Transportation			
SEATTLE			
4 KOMO			
11:00 AM	Multiple Format	00:04:47/ 00:01:44	405 will be closed tonight/Int: Sue Horsey, 405 commuter/ Int: Claudia Cornish, Dept of Transportation
Segment of MIDDAY NEWS			
11:00 AM	Voice Over	00:08:31/ 00:00:24	Sound Transit: new transit name
Segment of MIDDAY NEWS			
5:00 PM	Multiple Format	00:14:36/ 00:01:38	I-405 to be shut down for the weekend... Coal Creek Parkway to Maple Valley Highway southbound
Segment of NEWS			
6:30 PM	Voice Over	01:42:59/ 00:00:36	I-405 southbound to be closed for weekend
Segment of NEWS			
11:00 PM	Multiple Format	01:02:40/ 00:03:60	I-405 southbound closed for the weekend
Segment of LATE NEWS			
Int: Bill Southern, State Transp. Dept... Int: John Anderson, State Patrol... Int: Gary Hitzel, Bellevue resident... Int: Marty Kaplan, Bellevue resident			
5 KING			
12:00 PM	Voice Over	00:12:02/ 00:00:36	405 will be closed this weekend
Segment of NOON NEWS			
6:00 PM	Multiple Format	00:21:30/ 00:02:40	I-405 southbound to be closed this weekend
Segment of NEWS			
From Coal Creek to Maple Valley Highway			
Int: Bill Southern, Dept. of Transp			
Int: Royal Robinson, commuter			
6:30 PM	Voice Over	01:41:20/ 00:00:20	I-405 closed for weekend for resurfacing
Segment of NEWS			
11:00 PM	Multiple Format	01:06:58/ 00:01:13	Southbound I-405 to be closed for weekend for re-paving
Segment of LATE NEWS			
11:00 PM	Multiple Format	01:12:08/ 00:02:52	Commuter alert I-405 to be closed for the weekend...Int: (R)...Int: (R)
Segment of LATE NEWS			
7 KIRO			
5:00 PM	Multiple Format	00:21:25/ 00:01:20	I-405 southbound closure for the weekend for re-paving
Segment of NEWS			

Program	Clip Type	Time in Length	Description
11:00 PM Segment of LATE NEWS 11 KSTW	Multiple Format	00:39:45/ 00:00:25	I-405 southbound closure this weekend for re-paving TACOMA
10:00 PM Segment of LATE NEWS	Multiple Format	00:04:16/ 00:04:06	I-405 southbound closure this weekend for re-paving...Live coverage...Int: Bill Southern, State Transportation Dept.
<u>Saturday, August 16, 1997</u>			
NORTHWEST REGION			
35 NWCN			
7:00 PM Segment of NEWS	Multiple Format	01:35:40/ 00:01:40	I-405 closed, traffic is better than expected KING 5 story
SEATTLE			
4 KOMO			
5:00 PM Segment of NEWS	Voice Over	00:03:27/ 00:00:33	I-405 southbound closure to repave this weekend
6:00 PM Segment of NEWS	Multiple Format	00:08:15/ 00:02:10	I-405 new Factoria weekend closure coverage Int: Bill Southern, Dept of Transportation
6:30 PM Segment of NEWS	Multiple Format	01:35:15/ 00:00:42	I-405 closure this weekend going southbound Int: Bill Southern, Dept. of Transportation
11:00 PM Segment of LATE NEWS	Voice Over	00:07:15/ 00:00:30	I-405 closed this weekend
5 KING			
5:00 PM Segment of NEWS	Multiple Format	00:06:37/ 00:02:13	I-405 weekend closure coverage...for repave-ment...Int: Bill Southern, Dept of Transportation...Alternative routes
6:30 PM Segment of NEWS	Multiple Format	01:35:48/ 00:01:50	I-405 closure this weekend...Int: Sgt John Anderson, Police
11:00 PM Segment of LATE NEWS	Multiple Format	00:07:37/ 00:01:43	I-405 southbound closure...coverage...closed this weekend for repaving
7 KIRO			
5:00 PM Segment of NEWS	Multiple Format	00:08:35/ 00:01:25	I-405 closure for repaving this weekend southbound...Int: Heather Saunders, motorist
6:30 PM Segment of NEWS	Multiple Format	01:03:30/ 00:02:06	I-405 southbound closure...Int: Kim Lettich, gas station employee... Int: (R)
11:00 PM Segment of LATE NEWS	Multiple Format	00:05:37/ 00:00:48	I-405 southbound closed for weekend for repaving...Int: Kim Lettich, Chevron employee
TACOMA			
11 KSTW			
10:00 PM Segment of LATE NEWS	Multiple Format	00:06:20/ 00:01:10	I-405 southbound closure this weekend...Int: Bill Southern, Dept of Transportation

<u>Program</u>	<u>Clip Type</u>	<u>Time in Length</u>	<u>Description</u>
<u>Sunday, August 17, 1997</u>			
NORTHWEST REGION			
35 NWCN			
7:00 PM	Anchor Read	01:38:50/ 00:00:18	I-405 to reopen
Segment of NEWS			
SEATTLE			
4 KOMO			
5:00 PM	Voice Over	00:08:12/ 0:00:31	I-405 paving project is running on schedule
Segment of NEWS			
11:00 PM	Voice Over	01:07:57/ 00:00:21	I-405 paving on schedule
Segment of LATE NEWS			
5 KING			
5:00 PM	Voice Over	00:12:58/ 00:00:42	I-405 to reopen southbound lanes
Segment of NEWS			
11:00 PM	Voice Over	00:10:02/ 00:00:36	I-405 to reopen after paving
Segment of LATE NEWS			
7 KIRO			
6:00 PM	Voice Over	00:16:51/ 00:00:16	Interstate 405 closed for road construction
Segment of NEWS			
6:30 PM	Voice Over	01:11:35/ 00:00:28	Closures on 405 for construction repairs
Segment of NEWS			
11:00 PM	Voice Over	01:14:08/ 00:00:35	405 closed for construction
TACOMA			
11 KSTW			
10:00 PM	Voice Over	00:11:28/ 00:00:40	I-405 shutdown causes traffic problems
Segment of LATE NEWS			
<u>Monday, August 18, 1997</u>			
NORTHWEST REGION			
35 NWCN			
7:00 AM	Voice Over	00:42:03/ 00:00:29	I-405 paving done on southbound lanes
Segment of NEWS			
TACOMA			
11 KSTW			
11:00 PM	Voice Over	00:15:44/ 00:00:29	Southbound lanes of I-405 reopened on time this morning
Segment of LATE NEWS			

⁵⁵¹⁸ There's light at the end of our traffic congestion, but watch out for I-405

By **BOB WODNIK**
Herald Writer

Maybe — and your fingers should definitely be crossed on this — the summer-long traffic congestion in Everett is easing.

Not easing a lot, just a little.

Sometime in the next couple of days the I-5 bridge resurfacing project forcing around-the-clock freeway lane closures is inching north from about 41st Street SE to near Everett Avenue.

There are a lot of ifs and maybes to the possible traffic improvement, but here is what's certain: The contractor on the \$3 million job, Mowat Construction Co., has completed overlays on three bridge decks in downtown Everett: the southbound bridge over Pacific Avenue, the northbound bridge over the railroad mainline near Smith Avenue and the northbound bridge over Everett Avenue.

Because the construction work is moving north to Everett Avenue, the tie-ups around 41st Street may not be as troublesome, said Steve Miller, project manager for the state Department of Transportation.

"We're hoping the backups won't be as lengthy," he said.

Also in the next couple of days, workers will close the I-5 southbound bridge over the Snohomish River, and although southbound travelers will encounter backups sooner than before, they shouldn't be too severe, he said.

The only anticipated major traffic congestion will be at the northbound on-ramp at Everett Avenue, he said.

The bad news is that the I-5 bridge work in Everett will continue through September.

The increasing year-round congestion and protracted rush hours are apparently on the minds of a lot of Puget Sound residents.

One conclusion from recent research conducted for the Regional Transit Authority is that the public is more concerned with traffic congestion than education, crime and growth.

"People are very frustrated with traffic," Anne Fennessy, a partner with the Cocker Company, a public relations and public affairs company hired by the RTA, told RTA leaders earlier this summer.

The consultant's conclusions came from interviews with 34 business, government and civic leaders in the region, four focus groups and an opinion survey of 500 registered voters in central Puget Sound.

The RTA research also found that the public supports regional transit services between Puget Sound cities, has extremely high expectations for the RTA, expects the agency to be sensitive to neighborhood concerns and yet complete projects on time and within budget, and believes park-

and-ride lots and expanded bus service are as important as rail service.

Congestion frustration has increased this summer as major resurfacing projects have clogged major freeways.

The biggest and potentially most disruptive project will be this weekend when the DOT plans to close all southbound lanes of I-405 from the Coal Creek Parkway SE to the Maple Valley Road in Renton. The closure will be from 8 p.m. Friday to 5 a.m. Monday.

This is the first time the state is closing a major freeway for repaving, and the results will be closely monitored to see if it's successful. The idea is to take the pain in one dose rather than spreading it out for weeks.

The northbound lanes of I-405 are scheduled for closure the following weekend.

The DOT's advice for I-405 travelers the next two weekends?

"Impacts will be significant," DOT officials said in a release. "Motorists are advised to avoid the area entirely."

5518

A closed I-405 to call for creative driving

Leave plenty of time for weekend travel

By Jacqueline Reis
Journal Reporter

There's no use mincing words; it's gonna be a mess.

When Interstate 405's southbound lanes between Factoria and Renton close tonight for a weekend facelift, drivers heading to South King County will be left with few alternate routes until the lanes reopen at 5 a.m. Monday.

"There are no alternate routes that can handle the volume of the 405," said Claudia Cornish, a public information officer at the state Department of Transportation. "We're hoping that people will use routes that they're familiar with."

See ALTERNATE ROUTES, A6

Alternate routes

Continued from A1

The northbound lanes will stay open this weekend, but next weekend they will close and the southbound lanes will be open.

As Kent resident Chris Blanchard exclaimed when he heard the news, "That's going to screw everything up."

Southbound traffic will be diverted off I-405 beginning 8 p.m. today at Coal Creek Parkway Southeast, which may make the parkway itself a prime alternative for drivers who prefer not to take Interstate 90 across the lake to Interstate 5.

From Coal Creek, southbound drivers can take 138th Avenue Southeast to Northeast Sunset Boulevard, then jump back on I-

'It's going to be a zoo out there.'

Express Car driver and Newcastle resident
Howard Nelson

405 at the State Route 169/Maple Valley Road ramp.

But don't expect to have the country atmosphere of Coal Creek all to yourself. Despite the DOT's refusal to direct drivers to any one alternative route, those who frequent Coal Creek Parkway expect to have plenty of company this weekend.

"It's going to be a zoo out there," said Express Car driver and Newcastle resident Howard Nelson. "The road's not big enough as it is to handle the traffic that goes through here," he added, while waiting in line at the AM/PM

at the corner of Coal Creek Parkway, 72nd Place Southeast and 69th Way Southeast.

For those seeking a less frenzied route, the drive south along 119th Avenue Southeast, eventually connecting to Lake Washington Boulevard, is leisurely — if not complete. With a speed limit seldom higher than 25 mph and stop signs throughout, this winding drive would be easy on the eyes but for the orange detour signs at 112th Avenue Southeast sending motorists on a large loop back to the boulevard via 116th and Lincoln Avenue Northeast.

The truly adventurous (and those not in a hurry) could take I-90 to Issaquah, then Front Street South to Issaquah-Hobart Road, before turning west on May Valley Road to 128th Avenue Southeast and into Renton.

SS18/

F-8

I-405 closures may spell gridlock

Huge repaving project starts this weekend

F-9

BY PRYTON WHITELY
Seattle Times Eastside bureau

It's never been done before: closing all lanes in one direction of Interstate 405 for repaving.

Beginning at 8 p.m. Friday, six miles of southbound I-405 from Coal Creek Parkway in Bellevue to state Highway 169 (Maple Valley Road) in Renton will be closed until 5 a.m. Monday.

The following weekend, the northbound lanes will be shut — same hours, same stretch.

State highway engineers hope the closures, weather permitting, will let them accomplish in four days what typically would take more than two months.

"We'd run out of paving weather before we could complete 10 weeks of paving," said Kim Henry, project engineer for the state Department of Transportation.

CLOSURE

CONTINUED FROM PAGE 1

And no one's exactly sure how it's going to work, Henry said. State Highway 520, including the Evergreen Point Floating Bridge, has been closed for periodic repaving, and Interstate 90 was closed during construction in the late 1980s and early '90s.

But those two east-west routes can serve as detours for each other. Interstate 405 normally carries more than 100,000 cars a day, and an obvious question is where they will go. Will they all fit on I-5, the main alternate route?

"Probably not," said Henry. "Unlike a lot of areas around the country, we don't have a lot of local parallel bypass routes."

The number of possible Eastside detours is short: There's state Highway 18, the Issaquah-Hobart Road, the Issaquah-Renton Road and maybe parts of Coal Creek Parkway, if going through Yakima isn't considered an option. There will be no designated detours.

Henry says the DOT hopes that with enough publicity, drivers simply will choose not to travel through or near the I-405 corridor over the next two weekends.

By December, the engineers

should know whether their experiment was more cost-effective, and perhaps safer, than the typical nighttime closures.

The I-405 shutdown will be studied by University of Washington professors Fred Mannering and Phil Dunston under a \$50,000 federal and state grant.

With teams of grad students, Dunston will check pavement quality and other construction factors. One theory is that an uninterrupted closure will produce a better-quality pavement, because it will be possible to match seams more closely.

Mannering will study the closure's effect on traffic by mailing 2,000 questionnaires to drivers who have used I-405 on previous weekends.

Those drivers were identified by grad student Doohee Nam and Mannering's wife, Jinsen Lee, who traveled I-405 on recent weekends. While Nam drove, Lee entered license-plate numbers into a laptop computer.

Those numbers were matched with addresses through state Department of Licensing computers, and surveys will be mailed to vehicle owners. They'll be asked such questions as whether they knew about the weekend closures, whether their plans were affected by it and whether

No one's sure how it's going to work. Highway 520 has been closed for periodic repaving, and I-90 was closed during construction in the late 1980s and early '90s. But those two east-west routes can serve as detours for each other. Not so with I-405.

they had to shop at different-than-normal locations.

Survey results are to be published by December.

The I-405 paving project is the culmination of more than 1½ years of construction. The sections being repaved have been torn up since November 1995, in part for installation of an electronic traffic-control system.

Called Surveillance, Control and Driver Information, the \$34 million project included remote TV cameras and sensing devices linked by fiber-optic lines embedded in the pave-

ment.

Figuring out how to repave miles of freeway lanes over two weekends and moving hundreds of trucks to and from the site has been a major challenge, Henry said.

The paving subcontractor, M. Segale of Tukwila, arranged with Boeing to use part of its parking lot on the west side of I-405 to set up a portable asphalt-mixing plant.

"What was our biggest obstacle has now disappeared," Henry said.

More than 20,932 tons of asphalt will be used to repave the southbound lanes and 22,013 tons to repave the northbound lanes.

The new roadway is expected last about seven years, Henry said, depending on traffic volumes, truck traffic and studded-tire use.


Henry, who has been with the DOT 18 years, said the I-405 project seems nearly symbolic of the area's incessant congestion.

A Green Lake resident who works at the construction headquarters where Interstates 90 and 40 meet, Henry has found his own way to deal with traffic jams.

"I've taken to riding my bike here during the summer," he said.

Peyton Whitely's phone message number is 206-464-2259. His e-mail address is: pwhi-new@seattimes.com

SS/18

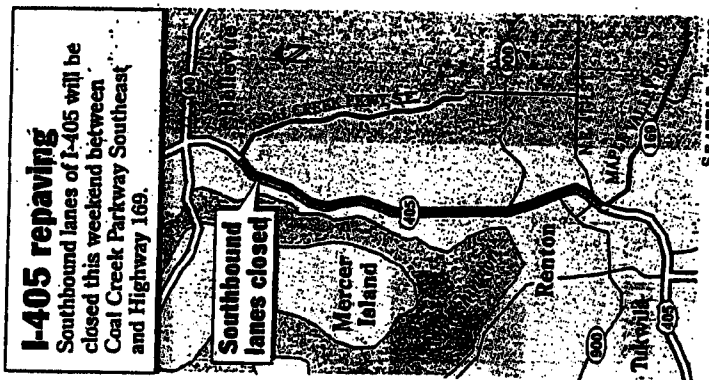

How can you avoid weekend 405 mess?

Stay home, state says

By Mike Ullmann
Journal Reporter

Wait and see.

See if all traffic between Bellevue and Renton stops dead this weekend.

See if road rage erupts among motorists stranded on side streets.

See if the mail can get through.

Nobody knows the answers, as the Eastside faces the first-ever closure of its major freeway.

"I don't know how you could come up with a plan for something like this," says Bellevue Postmaster Robert Montgomery. "We'll just get in line with everybody else."

All southbound lanes of Interstate 405 will close at 8 p.m. today and remain shut all weekend, re-opening at 5 a.m. Monday. Only emergency vehicles will be allowed to use the roadway.


The following weekend, all northbound lanes will close for the same days and times and the same distance — Coal Creek Parkway Southeast to State Route 169.

"It's not going to be fun," says Bellevue Police Lt. Bill Ferguson.

The state believes it will save up to \$350,000, and avoid months of nighttime lane closures, by repaving all lanes together instead of one-by-one.

It's essentially a giant experiment. Tomorrow morning, transportation officials will get a helicopter view of what they have wrought.

See 405, A11

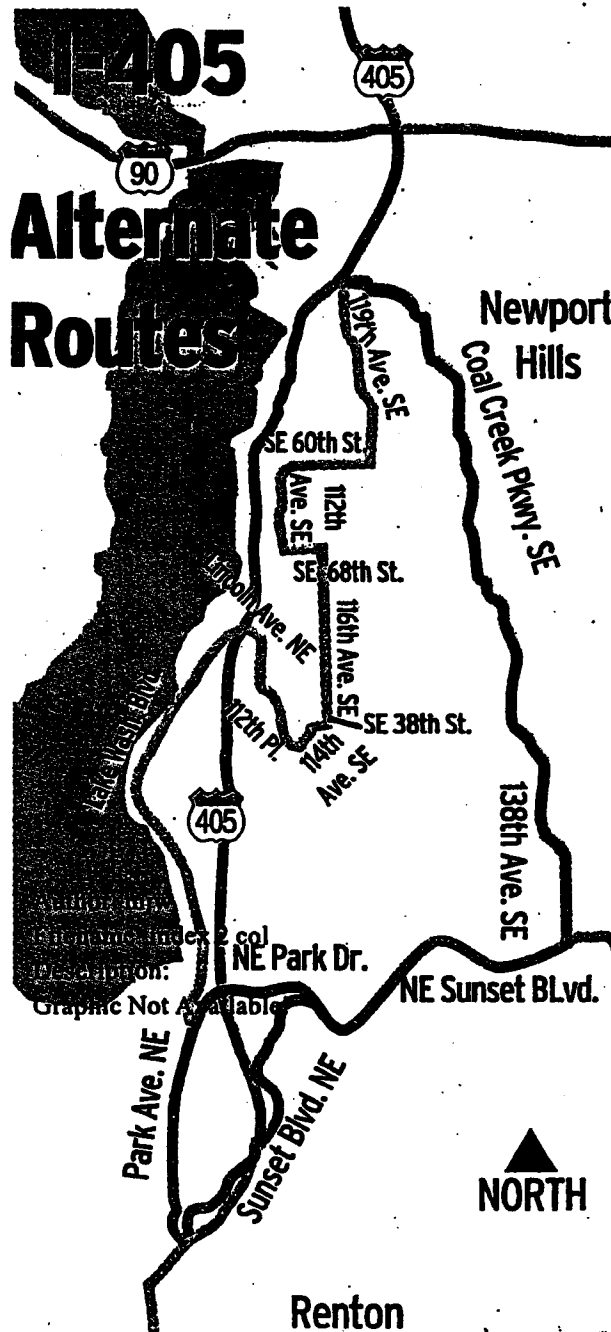

It's your call

Tell us your thoughts on this weekend's closure of I-405. Call with your comments at 453-2360, or email us at yourcall@eastsidejournal.com

I-405 detours

Journal Staff

From Coal Creek, southbound drivers can take 138th Avenue Southeast to Northeast Sunset Boulevard, then jump back on I-405 at the State Route 169/Maple

"We're kind of really pushing the limits of the industry" with the massive paving project, said Kim Henry, project engineer.

The state is asking for motorists' feedback, and has even arranged with University of Washington civil engineering professors Fred Mannering and Phillip Dunston, and their students, to study the project.

The students will be measuring the paving quality.

"I'm really impressed with them," Dunston said of the students, who will be out all night.

The University group also will collect motorists' feedback.

"We think this is a good idea to save money. We think it's a good idea to reduce inconvenience. But we want to know if it works for people," says Rick Olson of the state Department of Transportation.

This weekend's southbound six-mile stretch of I-405 normally carries about 131,000 cars a day. Where will they go?

Officials hope they'll just stay home.

"That worked pretty well a couple of years ago when we took the freeway down to just one lane," says Claudia Cornish of the state Department of Transportation. "We asked them to stay home, and many did."

Tomorrow, though, 45,000 peo-

ple are expected at the Kingdome for a 7 p.m. Seahawks game, and it's unlikely they'll be content just to watch it on TV.

Most drivers are expected to take one of the floating bridges across the lake to join the rolling backup on Interstate 5.

Another probability is that side streets on the Eastside and South King County will clog as motorists try to find alternatives to I-405.

The problem: There aren't any. If enough cars are looking for detours, the lines could stretch literally for miles.

The resultant traffic jams could cause severe problems for fire, police and even the mail.

"Our biggest concern is what it will do to our route to Overlake Hospital," said Wes Collins, an Issaquah fire division chief.

"Otherwise, it's not a huge impact to us unless everybody decides to go through Issaquah," said Collins.

His city has warned emergency crews to expect heavy traffic on alternative routes, such as Highway 18 over Tiger Mountain and State Route 900 (the Issaquah-Renton Road.)

Bellevue expects trouble on 148th Avenue Southeast. Meanwhile, "Coal Creek Parkway has certainly been jamming up," said Fire Lt. Marty La Fave.

"One rear-ender could completely mess up any operation that would keep it even inching along."

If emergency crews can make

405 lane closure details

When: This weekend, all southbound lanes from 8 p.m. Saturday until 5 a.m. Monday

Next weekend, all northbound lanes for the same hours and days.

Where: The six miles from Coal Creek Parkway Southeast in Bellevue to State Route 169 in Renton.

Travelers affected: "It's virtually impossible to say," according to Claudia Cornish of the state transportation department: About 140,000 cars a day use I-405, but it's unknown how many drivers might just stay home this weekend.

Official state figures actually show an average of 151,000 vehicles travel north on I-405 daily, while 131,000 come southbound. The official state figures don't account for the missing 20,000 cars.

What to do: If you have to travel, here are some tips to avoid road rage from Bellevue

Police Lt. Bill Ferguson.

"Turn on the radio, listen to some music. Make sure you're dressed comfortably, so you don't sweat to death in the heat.

"If you're stuck in a long traffic mess, more than likely somebody will cut in front of you at some point. Take a deep breath, let it out, and let them have their way. Don't add to it by getting enraged yourself.

"If they commit a crime, get their license number, try for a description of the driver, and call the police. We're paid to handle it. You're not."

Who to call:

For road and highway information, the state transportation hotline is DOT-HIWY.

For cellular phone users: 1-800-695-ROAD.

To complain about the closure: Transportation Spokeswoman Claudia Cornish at 440-4472.

it through the side streets, they'll actually have it easy when they get back to I-405.

THEY get all lanes of the closed freeway to themselves.

"We are assured of access through the weekend, if we use our lights and sirens to let the

construction crews know we're coming," said Warren Merritt, the Bellevue fire chief in charge of emergency medical response.

"You know what?" La Fave said. "Our response times might be even better than a normal weekend."

After 50 years of building, I-405 still a work in progress

By Chris Norred
Journal Reporter

Can't remember when Interstate 405 was not under construction? Maybe that's because it's been awhile.

"That highway has been in various stages of construction or reconstruction since 1948 or '49," Ves Bogart of Edmonds said.

He should know.

Bogart, who retired from the Washington state Department of Transportation nearly 20 years ago, worked on the freeway for three decades in various capacities, including chief of the district.

He worked on a survey crew in 1949 mapping the route through cow pastures where downtown Bellevue stands today. Later as highway administrator, he oversaw construction of the interstate freeways through King County and northwest Washington.

In the early 1950s, plans already had been drawn for a two-lane route from Highway 99 at Burien around the east side of Lake Washington and north to Woodinville. The state estimated

the highway would cost \$271 million.

Then in 1956, President Eisenhower announced the Federal Aid Highway Act to build a 42,500-mile system of interstate freeways at an estimated cost of \$41 billion. In Washington, about \$1.25 billion was spent on 763 miles of interstate, including I-405.

Commuters stuck in the constant traffic these days may wonder how the freeway arrived in its current, crowded condition. But engineers who worked on the original highway say nobody ever envisioned the bumper-to-bumper traffic of today.

Boom unexpected

When the interstate system was approved, the priorities were Interstate 5 and Interstate 90. No one predicted the population boom on the Eastside — which accelerated after the Evergreen Point Floating Bridge opened in 1963 — and I-405 was little more than a bypass.

Brian Henkel, who worked 32 years for the DOT and served as Interstate 90 project manager before retiring in 1989, recalls the debate in the 1950s about the need

for the freeway around the lake.

"I remember when we started building it, there were comments in the newspaper about the Highway Department going crazy. They said there would never be enough traffic for six lanes on that route," Henkel said.

As early as 1959, however, Bellevue residents were lobbying for a new interchange and decrying the traffic congestion at the crossroads.

Sections of the highway, from Bellevue north to Kirkland and from Burien to Renton, were built before the interstate system — without the interstate standards of four lanes, divided highway and limited access. That fact assured that crews soon would be back rebuilding the highway.

Every interchange on I-405 has been reconstructed, some two or three times. The downtown Bellevue interchange at Northeast Eighth Street has been rebuilt three times.

Originally, Bogart said, that interchange was literally a crossroads with a blinking yellow caution light.

"You could have bought any of

the land in sight for \$2,000," he said. The only businesses were a Texaco station and a hamburger stand.

Bogart recalls that funding limits forced the state to scrap its plan for a tunnel through Renton Hill. Instead, highway engineers built the infamous S-curves on a two-lane bridge. The design was intended to follow existing rights-of-way as closely as possible and to destroy the fewest number of homes.

Pull up stakes

Renton's former Mayor Earl Clymer recounted the story about his late wife, who grew up on Renton Hill, coming home after school to pull up survey stakes because the community disliked the state's plan.

Bogart said the construction of I-405 also raised a controversy among horsemen and racing fans at the old Longacres racetrack. The track fans worried that the limited access highway would make it more difficult to come and go from the track.

In the 1970s, the highway was widened to four lanes its entire distance and to six lanes north of

Bellevue.

In the 1980s, HOV lanes were constructed from I-90 to Bellevue. And the downtown Bellevue interchange was reconstructed and expanded.

In the 1990s, after years of planning, the S-curve bridges in Renton were torn down and rebuilt.

This weekend's closure of the southbound lanes from Factoria to Renton is the first in the highway's history.

The entire 30-mile length of the highway opened in 1965, but Bogart cannot recall ever having anything like a grand opening celebration.

Instead, highway crews already were going back to rebuild portions of the freeway that had fallen below standards.

"People say, 'Aren't you ever going to finish?'" Bogart said. "The construction of the entire length took so long. As we went, the design got larger, and you had to go back and take a look at what you had already built.

"It has been a constant series of construction and reconstruction projects over 50 years."

Sunday

August 17, 1997 *

\$1



Bruce Lytle/Journal

I-405

After 50 years, still a work in progress

By Chris Norred
South County Journal

Can't remember when Interstate 405 was not under construction? Maybe that's because it's been awhile.

"That highway has been in various stages of construction or reconstruction since 1948 or '49," said Wes Bogart of Edmonds.

He should know.

Bogart, who retired from the Washington State Department of Transportation nearly 20 years ago, worked on the freeway for three decades in various capacities, including chief of the district.

He worked on a survey crew mapping the route through cow pastures in 1949 where downtown Bellevue stands today. Later, as highway administrator, he oversaw construction of the interstate freeways through King County and northwest Washington.

I-405 AT A GLANCE

■ Planning for the Eastside Bypass, today known as Interstate 405, started in the late 1930s — about the same time the original Interstate 90 floating bridge was under construction.

■ Funding was provided by President Eisenhower's Federal Aid Highway Act of 1956. Estimated cost for completion of I-405 in 1959 dollars was \$271 million.

■ Original plans for the two-lane state highway included a tunnel through Renton Hill. When funding fell short, the infamous S-curves were built and opened in June 1963. More than 30 years later, they were modified.

■ An average of 151,000 vehicles travel north on I-405 daily, while an average of 131,000 vehicles travel south on the freeway each day.

See FIFTY YEARS, A5

I-405

After 50 years, still a work in progress

By Chris Norred
South County Journal

Can't remember when Interstate 405 was not under construction? Maybe that's because it's been awhile.

"That highway has been in various stages of construction or reconstruction since 1948 or '49," said Wes Bogart of Edmonds.

He should know.

Bogart, who retired from the Washington State Department of Transportation nearly 20 years ago, worked on the freeway for three decades in various capacities, including chief of the district.

He worked on a survey crew mapping the route through cow pastures in 1949 where downtown Bellevue stands today. Later, as highway administrator, he oversaw construction of the interstate freeways through King County and northwest Washington.

See FIFTY YEARS, A5

I-405 AT A GLANCE

■ Planning for the Eastside Bypass, today known as Interstate 405, started in the late 1930s — about the same time the original Interstate 90 floating bridge was under construction.

■ Funding was provided by President Eisenhower's Federal Aid Highway Act of 1956. Estimated cost for completion of I-405 in 1959 dollars was \$271 million.

■ Original plans for the two-lane state highway included a tunnel through Renton Hill. When funding fell short, the infamous S-curves were built and opened in June 1963. More than 30 years later, they were modified.

■ An average of 151,000 vehicles travel north on I-405 daily, while an average of 131,000 vehicles travel south on the freeway each day.

Fifty years

Continued from A1

In the early 1950s, plans already had been drawn for a two-lane route from Highway 99 at Burien around the east side of Lake Washington and north to Woodinville. The state estimated the highway would cost \$271 million.

Then in 1956, President Dwight Eisenhower announced the Federal Aid Highway Act to build a 42,500-mile system of interstate freeways at an estimated cost of \$41 billion. In Washington, about \$1.25 billion was spent on 763 miles of interstate, including I-405.

Commuters stuck in the constant traffic these days may wonder how the freeway arrived in its current, crowded condition. But engineers who worked on the original highway say nobody ever envisioned the bumper-to-bumper traffic.

When the interstate system was approved, the priorities were Interstate 5 and Interstate 90. No one predicted the population boom on the Eastside — which accelerated after the Evergreen Point Floating Bridge opened in 1963 — and I-405 was little more than a bypass.

Brian Henkel, who worked for the DOT for 32 years and served as Interstate 90 project manager before retiring in 1989, recalls the debate in the 1950s about the need for a freeway around the lake.

"I remember when we started building it, there were comments in the newspaper about the Highway Department going crazy. They said there would never be enough traffic for six lanes on that route," Henkel said.

As early as 1959, however, Bellevue residents were lobbying for a new interchange and decrying the traffic congestion at the crossroads.

Sections of the highway, from Bellevue north to Kirkland and from Burien to Renton, were built before the interstate system — without the interstate standards of four lanes, divided highway and limited access. That fact assured that crews soon would be back rebuilding the highway.

Paul Lumbert, who works in Renton's public works department, recalls that the original highway did not include an interchange in north Renton for Boeing workers.

Every interchange on I-405 has been reconstructed, some two or three times. The downtown Bellevue interchange at Northeast Eighth Street has been rebuilt three times.

Originally, Bogart said, that interchange was literally a crossroads with a blinking yellow caution light.

"You could have bought any of the land in sight for \$2,000," he said. The only businesses were a Texaco station and a hamburger stand.

Bogart recalls that funding limits forced the state to scrap its plan for a tunnel through Renton Hill. Instead, highway engineers built the infamous S-curves on a two-lane bridge. The design was intended to follow existing rights-of-way as closely as possible and to destroy the fewest number of homes.

Renton's former Mayor Earl Clymer recounted the story several times about his late wife, who grew up on Renton Hill, coming home after school to pull up survey stakes because the community disliked the state's plan.

Bogart said the construction of I-405 also raised a controversy among horsemen and racing fans at the old Longacres race-

track. The track fans worried that the limited access highway would make it more difficult to come and go from the track.

In the 1970s, the highway was widened to four lanes for its entire distance and to six lanes north of Bellevue.

In the 1980s, HOV lanes were constructed from I-90 to Bellevue. And the downtown Bellevue interchange was reconstructed and expanded.

In the 1990s, after years of planning, the S-curve bridges in Renton were torn down and rebuilt.


This weekend's closure of the southbound lanes from Factoria to Renton is the first in the highway's history.

The entire 30-mile length of the highway opened in 1965, but Bogart cannot recall ever having anything like a grand opening celebration.

Instead, highway crews already were going back to rebuild portions of the freeway that had fallen below standards.

"People say, 'Aren't you ever going to finish?'" Bogart said. "The construction of the entire length took so long. As we went, the design got larger, and you had to go back and take a look at what you had already built.

"It has been a constant series of construction and reconstruction projects over 50 years."

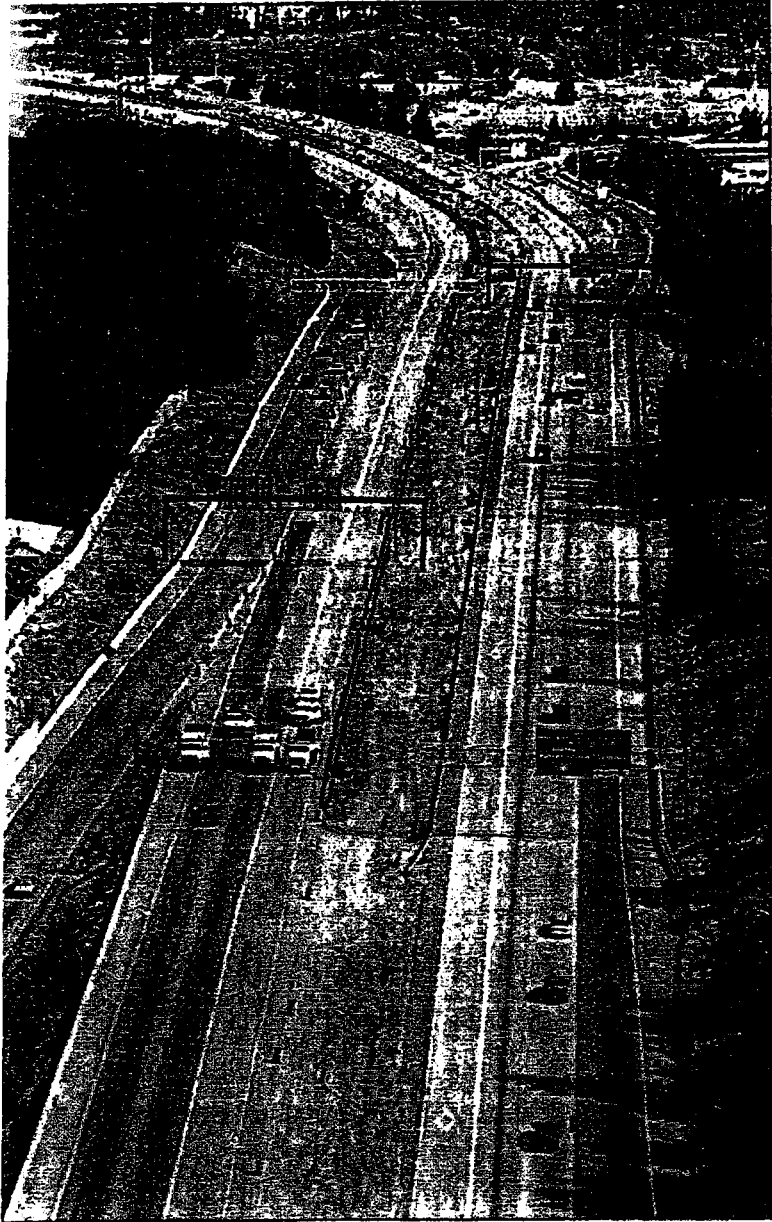

Bruce Lythe/Journal

Department Transportation's shut-down of I-405 went off smoothly yesterday morning, seen at the right end of closure at Coal Creek.

405 CLOSED SOUTHBOUND

All southbound lanes of Interstate 405 between Renton and Bellevue are closed through the weekend for repaving.

The lanes will reopen at 5 a.m. tomorrow. The closed section stretches from Coal Creek Parkway in Bellevue to State Route 169 in Renton.

There are no planned detour routes. Congestion may be heavy on side

streets, the floating bridges and Interstate 5.

All northbound lanes on the same stretch of 405 will be closed next weekend. To learn more:

The state transportation hotline is DOT-HWY.

Cellular phone users can call 1-800-695-ROAD.



RON WURZER / SEATTLE TIMES

Afternoon commuters head south on Interstate 405 near Renton.

Repaved stretch of 405 ⁵⁵¹⁸ to reopen early today

PI STAFF

A six-mile stretch of Interstate 405, closed over the weekend for repaving, was expected to reopen on schedule at 5 a.m. today, a state transportation spokesman said yesterday.

Nearly 50 workers using two pavers and 15 trucks were on target to lay 22,000 tons of asphalt on the base pavement of southbound lanes between Coal Creek Parkway in Bellevue and state Route 169 in Ren-

ton, spokesman Bill Southern said.

Traffic was moving freely on the alternate routes and on Interstate 5 in the Seattle area yesterday, Southern said.

The closure, which began Friday evening, marked the first time the Transportation Department has shut down all lanes in one direction of a freeway for repair work.

In the past, work was done over several weekends, with single-lane closures.

Southern said the experiment was working as planned.

It will be repeated at the same time next weekend over the same stretch of freeway in the northbound lanes.

The work was scheduled for a period when dry weather is normal, so a mixture of ground rocks and heavy oils can properly bind to the road.

SUSAN PAYNTER

Susan Paynter, whose column appears in this space on Mondays, Wednesdays and Fridays, is on vacation.

Drivers muddle through thoroughfare's closure

By Mike Uilmann and Linda Woo
Journal Reporters

The area's first weekend without Interstate 405 started smoothly.

"It looks like everybody stayed home," said Bill Southern, a spokesman for the state transportation department who flew over six vacant miles of southbound Interstate 405 at midday yesterday.

By late afternoon, however, traffic headed for southbound I-5

See LOST WEEKEND, A5

Statewide highway needs are likely to bring back gas-tax debate. A5

South County Telepoll

Today's question:

Have you been inconvenienced by the I-405 shutdown this weekend?

Call 800-982-5788 to vote.

Results of Saturday's poll on page A12.

Lost weekend

Continued from A1

had backed up clear across Interstate 90 to Mercer Island. On southbound I-5 itself, cars crawled at no more than 20 mph until well south of Boeing Field.

Traffic was expected to thicken later as fans flowed to the Kingdome for the Seahawks-Colts game.

Even so, the state's big experiment — closing all of I-405's southbound lanes for repaving — appeared an initial success.

"It had better be," Southern said. "It took us three years to get the courage to do this.

"A lot of other states are watching us this weekend. If it works, they want to try it," he said.

The state expects to save up to \$350,000 and avoid months of night-time lane closures by closing and repaving all the lanes at once.

Before southbound I-405 reopens at 5 a.m. tomorrow, contractors will have worked around the clock in three shifts to lay 6,500 tons of fresh pavement between Coal Creek Parkway in Bellevue and State Route 169 in Renton.

The project is so massive a temporary asphalt plant has been erected in a borrowed parking lot at Boeing Field to feed a fleet of yellow paving trucks.

As Southern's helicopter flew sideways up I-405 yesterday, barely 700 feet off the ground, a plume of smoke rose from the plant's smokestack. Directly below, shiny ribbons of fresh, black pavement glinted in the heat.

Traffic everywhere was light, and there was no early sign of worse-than-usual traffic jams on side streets, the floating bridges or I-5.

During the day, alternate routes between Factoria and Renton received a trickle of traf-

fic. Traffic along Coal Creek Parkway Southeast and State Route 900/Sunset Boulevard Northeast through Renton didn't appear any heavier than normal.

The biggest problem for most motorists wasn't congested roads; it was unknown routes. The transportation department provided no designated detours.

A usual 25-minute commute from Bellevue to Renton's West Hill took Jack McFall an hour and a half yesterday.

"I get lost easy," McFall admitted. "I tried to find Southeast 120th Street to get to Lake Washington Boulevard, but I passed it, so I drove all the way around the lake."

McFall, a counselor at Dimmitt Middle School in Skyway, was headed to the school to help with a cleaning party.

"I found Sunset (Boulevard) eventually," he said. "But it wasn't that bad. Anything they can do to make 405 better."

Just before noon, Betty Lauritzen of Gig Harbor stopped for directions at an AM/PM market on the corner of Coal Creek Parkway Southeast and Southeast 69th Way and Southeast 72nd Place. She had gone to Kirkland to do an errand and managed to make her way to Newcastle.

"I have no idea where I am or where I'm going," said Lauritzen, who was headed to a company picnic in Auburn. "It's so frustrating. The road was so twisty and turny.

"I figured they would have some detour signs," she said. "Not everyone who takes 405 lives in this area."

But not to worry, assured Kim Bowley, who just moved back to Renton after living in Bellevue for 10 years.


"There's a couple of ways, but this is the easiest," said Bowley, who gave Lauritzen directions and a hand-drawn map.

Sunday

just 17, 1997

www.eastsidejournal.com

\$1

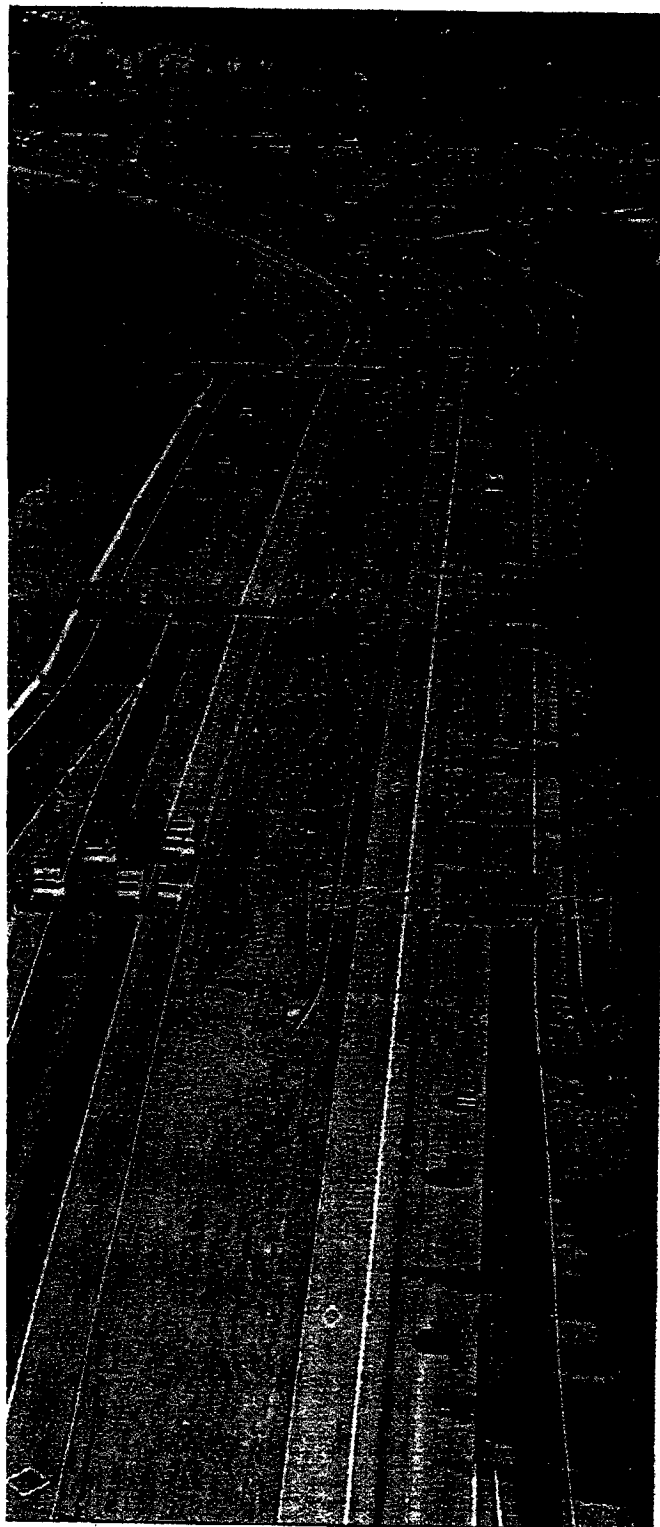

No gridlock: Drivers skirt 405 closure

By Mike Uhlmann and Linda Woo
Journal Reporters

The Eastside's first weekend without its major freeway started smoothly.

"It looks like everybody stayed home," said Bill Southern, a spokesman for the state transportation department who flew over six vacant miles of southbound Interstate 405 at midday yesterday.

By late afternoon, however, traffic headed for southbound Interstate 5 had backed up clear across Interstate 90 to Mercer Island. On southbound I-5 itself, cars crawled at no more than 20 mph until well south of Boeing Field.

Traffic thickened later as fans flowed to the Kingdome for the Seahawks-Colts game. Both floating bridges were heavily congested, but traffic didn't come to a stop, Southern said.

"I expect the rest of the weekend to go pretty well," he said last night.

If so, the state's big experiment — closing all of I-405's southbound lanes for repaving — would be successful.

"It had better be," Southern said. "It took us three years to get the courage to do this."

"A lot of other states are watching us this weekend. If it works, they want to try it," he said.

The state expects to save up to \$350,000 and avoid months of night-time lane closures by closing and repaving all the lanes at once.

Before southbound I-405 reopens at 5 a.m. tomorrow, contractors will have worked around the clock in three shifts to lay 6,500 tons of fresh pavement between Coal Creek Parkway in Bellevue and State Route 169 in Renton.

The project is so massive a

I-405 CLOSED SOUTHBOUND

All southbound lanes of Interstate 405 between Bellevue and Renton are closed through the weekend for repaving.

The lanes will reopen at 5 a.m. tomorrow. The closed section stretches from Coal Creek Parkway in Bellevue to State Route 169 in Renton.

There are no planned detour routes. Congestion may be heavy on side streets, the floating bridges and Interstate 5.

All northbound lanes on the same stretch of 405 will be closed next weekend. To learn more:

The state transportation hotline is DOT-HHWY.

Cellular phone users can call 1-800-695-ROAD.

I-405 has been under construction almost constantly for decades.

temporary asphalt plant has been erected in a borrowed park lot at Boeing Field to feed a plume of yellow paving trucks.

As Southern's helicopter flew sideways up I-405 yesterday, barely 700 feet off the ground, a plume of smoke rose from the plant's smokestack. Directly below, shiny ribbons of fresh, black pavement glistened in the heat.

Traffic everywhere was light and there was no early sign of worse-than-usual traffic jams on side streets, the floating bridges or Interstate 5.

Bruce Lytle/Journal
The state's shutdown of southbound I-405 went off smoothly yesterday morning, as seen here at Coal Creek. The one hitch so far: Some motorists got lost for lack of detour signs.

See I-405

I-405 roadwork

Continued from A1

"We accomplished everything we set out to do and more," said Dave Lindberg, assistant project engineer.

Some merchants said the closure wasn't as hard on businesses off the freeway as they feared.

"We expected nobody to come through, and it was pretty busy," said Nicole Arenis, a clerk at the Chevron station on North 30th Street.

She said sales were a little off, but added that construction crews and police officers working the closure were frequent customers.

Renton police also didn't report any major difficulties.

Traffic was heavier than usual through town, especially on Sunday, but police don't plan any special enforcement for this weekend's northbound closure.


"It really didn't seem to present any significant problems," spokeswoman Penny Bartley said.

If next weekend's closures are also successful, the tactic, which is expected to save as much as \$350,000 and months of smaller closures, will probably be used elsewhere.

"A lot of people are calling me and asking why don't we do this on Interstate 5 in Everett," where lanes have been closed for months, said Rick Olson of the transportation department.

"It looks like it works for a lot of people. But the experiment isn't over yet."

And the 405 lineup begins

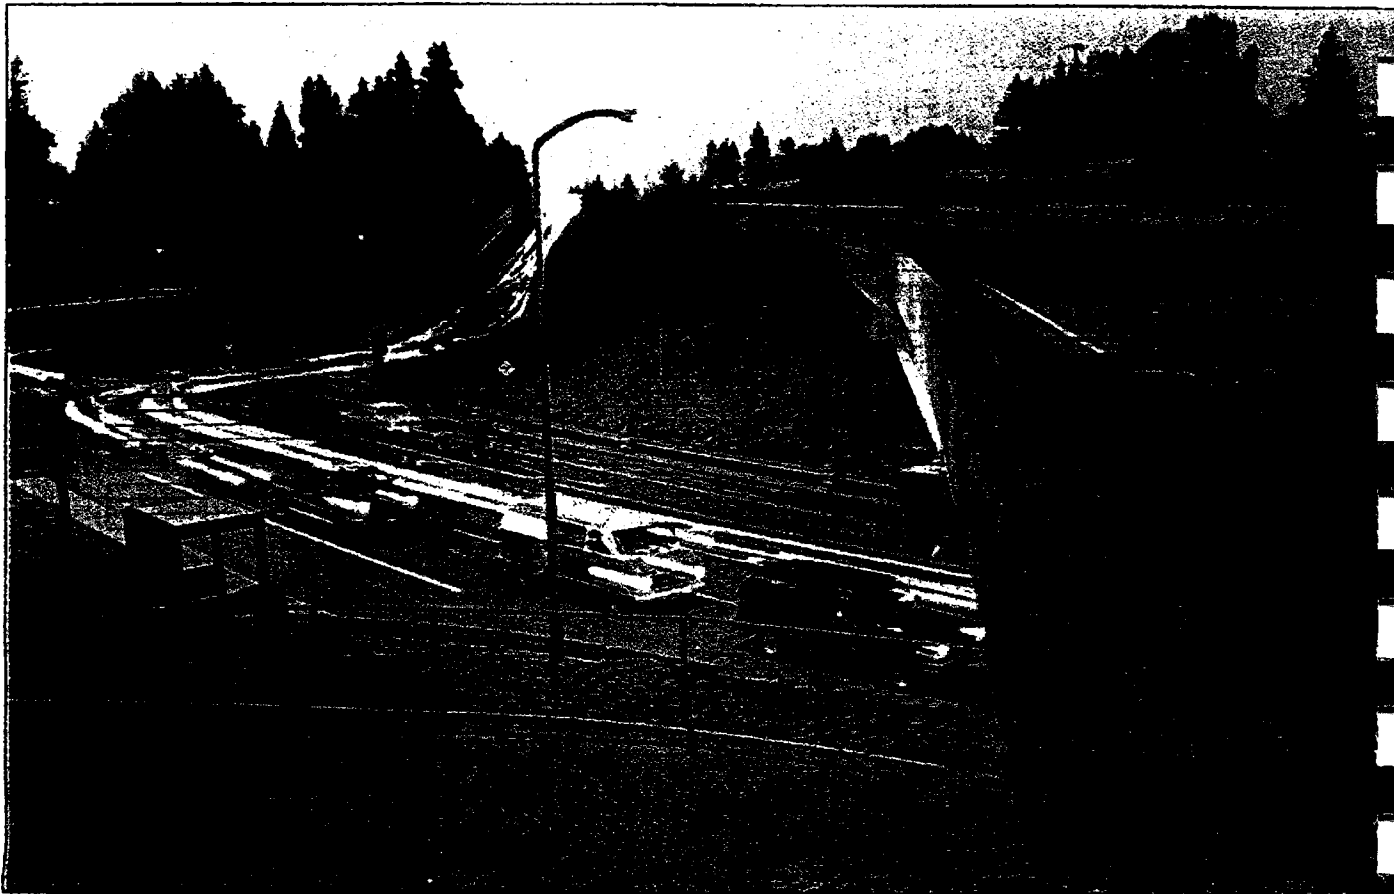

Cars exit from I-405 at Coal Creek Parkway and cross under the closed southbound lanes. The lanes closed for repaving at 8 p.m. and will reopen Monday

at 5 a.m., leaving drivers to choose between the already clogged Interstate 5 or residential roads. Northbound lanes will close next weekend.

Readers split over I-405 closures

Some say heads will roll; others grateful project to end in 2 weekends

By Mike Ullmann
Journal Reporter

Drivers seem split over the weekend closures of Interstate 405, the Eastside's major freeway, for repaving.

"Do it. Get it over with, so it's not stretched out over weeks or months," said Nancy Siroky of Redmond. "We will survive. It's only a couple of days."

Not so happy was Debbie Mallory of Bellevue.

"This weekend will be terribly bad for

our business," she said. "A lot of Eastside businesses will be affected drastically."

All southbound lanes of I-405 closed from Bellevue to Renton last night for an experiment in repaving. They will reopen Monday morning before rush hour.

The state has never before closed a major freeway for paving, but believes it will save as much as \$350,000 and avoid months of night-time lane closures by repaving all lanes together at once.

No one, not the state transportation department, nor police or city officials, can say how bad traffic will be.

"We'll know more when the weekend's over," said Claudia Cornish of the transportation department. That knowledge will be applied to next weekend's closure of all northbound lanes.

See I-405 CLOSURE, A6

ANATOMY OF A REPAVING PROJECT

All southbound lanes of Interstate 405 are closed through the weekend for repaving.

The lanes will reopen at 5 a.m. Monday. The closed section stretches from Coal Creek Parkway in Bellevue to State Route 169 in Renton.

There are no planned detour routes. Congestion is expected to be heavy on side streets, the floating bridges and Interstate 5.

All northbound lanes will be closed next weekend.

To learn more:

The state transportation hotline is DOT-HIWAY. Cellular phone users can call (800) 695-ROAD.

Closure

Continued from A1

Motorists who reacted to the Eastside Journal's continuing coverage of the project seemed divided. Some wanted to fire the responsible Department of Transportation officials.

"Usually it takes some disaster to close an entire interstate highway. But not here — it just takes putting decision-making into the hands of nonelected arrogant bureaucrats," said Mike Whiting of Redmond.

"People should be fired over this."

In agreement was Bernard C. Hainline of Bellevue.

"The officials who decided to close I-405 for two weekends failed to consider the desires and needs of the traveling public," Hainline said. "Their 'savings of \$350,000'

will be totally eliminated by one major accident on alternate routes when the legal costs of such are considered. The officials who made this closure decision should be replaced."

But Elaine Burdon of Redmond agreed with the plan.

"I suggest closing the road and get it done with, instead of sitting here (in traffic) waiting all the time."

Another booster was Eastsider Terry Gately.

"I'd rather deal with the closure that's two weekends long rather than dealing with the traffic and construction for a whole year," she said.

The final word won't be in until the paving experiment is over.

"The proof will be in what happens this Saturday and Sunday," noted Lamar Bass of Bellevue.

405's lost weekend comes out a success

By Herbert Atienza
Journal Reporter

BELLEVUE — State transportation officials yesterday declared their grand experiment on Interstate 405 a success, even though residents hoping for a quiet weekend's respite from noisy traffic were disappointed.

Instead of peace and quiet, residents on the west side of the freeway from Coal Creek Parkway to Renton were treated to drilling and a light show from crews and heavy machinery that repaved southbound lanes of the Eastside's main highway.

By yesterday afternoon, transportation department spokesman Bill Southern said, more than 80 percent of the southbound freeway had been repaved with more than 16,500 pounds of asphalt. Repaving of all southbound lanes from Coal Creek Parkway to State Route 169 was to be completed by 5 a.m. today, when the lanes were to reopen in time for morning rush hour.

"We're going according to plan, and we expect to meet our deadline," Southern said.

Commuters relieved to have their freeway back will have nothing on nearby residents, who withstood a weekend of pummeling noise.

"The road machinery made my windows rattle," said one resident on the

4400 block of 119th Avenue Southeast. He declined to be identified.

"We weren't really affected, except by the big machines which made some noise," said Eeri Waga, who lives in the 4400 block of Southeast 45th Place. "But it wasn't too bad."

She said she noticed no decrease in the noise coming from the freeway. "You'd think it would be quieter, but we didn't notice any difference," she said.

Her neighbor, Mark Davis, said the noise "hasn't been too bad."

He said he looked out from his deck Saturday evening to watch construction vehicles with lights that illuminated the work site.

"There was a row of them just going down the freeway," he said. "It was an interesting sight."

By repaving all the freeway lanes at once, Southern said, the state would save more than \$350,000 and motorists would be saved from months of delays.

The I-405 closures brought more vehicles to Interstate 5, but Washington State Patrol said there weren't many accidents.

See I-405, A2

Don't relax: I-405 work isn't over yet

By Mike Ullmann
Journal Reporter

Closing all southbound lanes of Interstate 405 for repaving over the weekend went like a dream, according to the state department of transportation.

But motorists' nightmares aren't over yet.

Individual lanes of I-405 will still be closed for weeks as crews put the finishing touches on 20,000 tons of fresh asphalt.

MORE CLOSURES

Next weekend all Interstate 405 northbound lanes from State Route 169 to Coal Creek Parkway will close from 8 p.m. Friday until 5 a.m. Monday.

They will continue even after next weekend's complete closure of all I-405 northbound lanes in the same 6 miles, from State Route 169 to Coal Creek Parkway.

"Over the next several weeks,

motorists will still encounter day and night single-lane closures throughout the project," said Claudia Cornish, transportation spokeswoman.

That's been true for almost two years. Will the lanes ever stay open?

"In that area, yes," Cornish said. "In other areas of 405, no."

The final single-lane closures between Bellevue and Renton are necessary to paint concrete barriers, complete a noise wall, finish electrical work for the computerized traffic sensors,

See I-405 ROADWORK, A9

I-405 roadwork

Continued from A1

install permanent signs and remove construction debris.

But elsewhere it'll be more of the same old traffic.

Expect big delays through next summer's construction season on I-405 at the Bothell-Woodinville interchange at State Route 522, and just to the north between SR-522 and SR-527.

There, HOV lanes and interchanges are being built between Bothell and the Swamp Creek area.

The unique, around-the clock weekend paving of I-405 was accomplished without major traffic jams elsewhere.

"We accomplished everything we set out to do and more," said Dave Lindberg, assistant project engineer.

If next weekend's closures are also successful, the tactic, which is expected to save as much as \$350,000 and months of smaller closures, will probably be used elsewhere.

"A lot of people are calling me and asking why don't we do this on Interstate 5 in Everett," where lanes have been closed for months, said Rick Olson of the transportation department.

"It looks like it works for a lot of people. But the experiment isn't over yet."

Don't relax: I-405 work isn't over yet

By Mike Ullmann
Journal Reporter

Closing all southbound lanes of Interstate 405 for repaving over the weekend went like a dream, according to the state department of transportation.

But motorists' nightmares aren't over yet.

Individual lanes of I-405 will still be closed for weeks as crews put the finishing touches on 20,000 tons of fresh asphalt.

MORE CLOSURES

Next weekend all Interstate 405 northbound lanes from State Route 169 to Coal Creek Parkway will close from 8 p.m. Friday until 5 a.m. Monday.

They will continue even after next weekend's complete closure of all I-405 northbound lanes in the same 6 miles, from State Route 169 to Coal Creek Parkway.

"Over the next several weeks,

motorists will still encounter day and night single-lane closures throughout the project," said Claudia Cornish, transportation spokeswoman.

That's been true for almost two years. Will the lanes ever stay open?

"In that area, yes," Cornish said. "In other areas of 405, no."

The final single-lane closures between Bellevue and Renton are necessary to paint concrete barriers, complete a noise wall, finish electrical work for the computerized traffic sensors,

install permanent signs and remove construction debris.

But elsewhere it'll be more of the same old traffic.

Expect big delays through next summer's construction season on I-405 at the Bothell-Woodinville interchange at State Route 522, and just to the north between SR-522 and SR-527.

There, HOV lanes and interchanges are being built between Bothell and the Swamp Creek area.

The unique, around-the clock weekend paving of I-405 was accomplished without major traffic jams elsewhere.

"We accomplished everything we set out to do and more," said Dave Lindberg, assistant project engineer.

If next weekend's closures are also successful, the tactic, which is expected to save as much as \$350,000 and months of smaller closures, will probably be used elsewhere.

"A lot of people are calling me and asking why don't we do this on Interstate 5 in Everett," where lanes have been closed for months, said Rick Olson of the transportation department.

"It looks like it works for a lot of people. But the experiment isn't over yet."

Motorists find ways past I-405 northbound closure

By Linda Woo
Journal Reporter

Traffic on eastbound State Route 900/Sunset Boulevard Northeast might be thicker than usual this weekend, but no major snarls were reported yesterday as travelers heading to the Eastside and beyond used alternate routes.

All northbound lanes of Interstate 405 from State Route 169/Maple Valley Highway in Renton to Coal Creek Parkway Southeast in Bellevue will remain closed for a major repaving project until 5 a.m. tomorrow.

Southbound lanes along the same stretch were closed last weekend.

Orlando Castro, for one, doesn't mind a few detours — and a couple of questions.

"They want to know how to get to Bellevue," said Castro, a clerk at the Chevron station on the corner of Union Avenue Northeast and Northeast Sunset Boulevard. "Coal Creek is your best bet."

Only 30 minutes into his shift yesterday afternoon, Castro had fielded half a dozen questions from customers looking for directions.

"That's OK. "Business is better," he said.

For more information on the I-405 road work, call (206) 368-4499 or (800) 695-7623. Cellular users can call toll-free at #800-4499. Or access the DOT's web site through the South County Journal's homepage, www.southcountyjournal.com, or directly at www.wsdot.wa.gov.

5718 I-405: Will weather cooperate again?

BY J. MARTIN McOMBER
Seattle Times Eastside bureau

Last weekend's closure of southbound Interstate 405 for repaving turned out better than anyone hoped. The question now: Will the weather cooperate this weekend to finish the job?

Traffic engineers planned to decide today whether to go ahead with plans to repave the six-mile stretch of the northbound lanes between Highway 169 in Renton and Coal Creek Parkway in Bellevue. Work is scheduled to run from 8 p.m. Friday to 5 a.m. Monday.

But just the threat of rain over the weekend could cause the state to postpone the job until next month. "Rain and asphalt don't mix," said Kim Henry, project engineer for the state Department of Transportation. "A cloudburst could really throw a wrench into the whole thing."

Henry will review tomorrow afternoon's forecast before making the call. If it looks bad, the DOT has

set aside the weekends of Sept. 12-14 and 19-21 as a backup, he said.

And if it rains then? "We really don't have a contingency plan beyond that," he said. "We are looking at probably next spring."

No one had closed an entire side of I-405 before, and no one was quite sure how it would play out.

But the move proved a success, allowing crews to do in two days what normally would take two months. Workers laid 20,000 tons of asphalt. And Henry said tests show the new pavement is smoother than if it had been done just one lane at a time.

The feared traffic jams caused by severing part of the Eastside's major north-south route didn't materialize. Congestion was heavier than normal on the obvious bypass, Interstate 5 in Seattle. But drivers did not clog Bellevue streets.

J. Martin McOmber's phone message number is 206-515-5628. His e-mail address is: mcom-new@seattimes.com

Weather today will determine I-405 closure

By Jacqueline Reis
Journal Staff

RENTON — Drivers planning to head north on Interstate 405 this weekend might want to pray for rain.

If it looks like the heavens will open in near Noah-ish proportions, the state Department of Transportation will postpone its plans to close a six-mile section of the northbound lanes of I-405 tonight through Monday.

Dry weather is needed for the state's big repaving project on the freeway

State offers bulletproof vests to crews working on I-405, A9


between State Route 169 in Renton and Coal Creek Parkway in Bellevue.

"A little sprinkle is all right, but we need to have about 36 hours of predictably dry weather," said Claudia Cornish, a spokesman for the DOT.

Cornish said she had hoped to know by 3:30 p.m. yesterday whether asphalt or rain would cover the highway this weekend, but DOT officials agreed to postpone their decision until 5 a.m. today.

If the project goes ahead, the DOT will close all northbound lanes of I-405 along the six-mile stretch from 8 tonight through 5 a.m. Monday. And, like last weekend, the DOT will not direct

See I-405 CLOSURE, A9

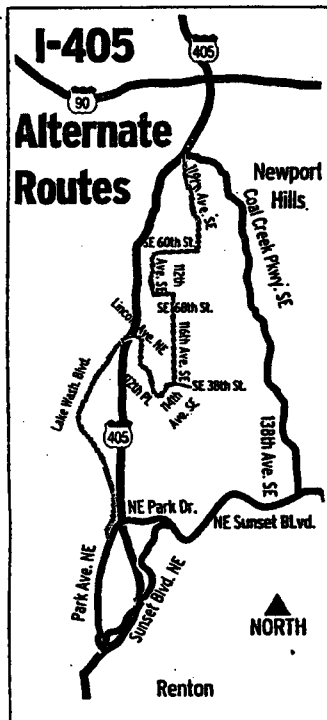

Dan O'Brien/Journal

If northbound lanes of Interstate 405 close for repaving between State Route 169 and Coal Creek Parkway, drivers seeking alternate streets may consider above routes. The Coal Creek route generally is speedier, while the Lake Washington Boulevard route winds through residential streets.

Information on I-405 can be obtained by calling 1-800-695-7623. The DOT's web address is www.wsdot.wa.gov

I-405 closure

Continued from A1

motorists to an alternate route.

"We hope people will fan out," Cornish said.

A number of drivers clogged Interstate 5 last weekend, according to Bill Southern of the DOT, but he noted that State Route 99 closures and a Seahawks game also contributed to that traffic.

For many drivers, heading north on I-5 and east across the Interstate 90 bridge is the best alternate if 405 closes this weekend.

South County drivers looking for alternate routes closer to home can consider taking:

- State Route 900/Sunset Boulevard Northeast to 138th Avenue Southeast, then up Coal Creek to the I-405 on-ramp.

- Bronson Way North/SR 900 West to Park Avenue North, then to Lake Washington Boulevard

INFORMATION

Information on the closure can be obtained by calling (206) DOT-HIWAY (368-4499); or 1-800-695-ROAD (7623), which is toll-free in Western Washington. Cellular users can call toll-free at #800-4499. The DOT's web site address is www.wsdot.wa.gov.

North. Lake Washington Boulevard is none too speedy, however, and drivers should be prepared to slow down and follow detour signs for the boulevard through residential areas leading back to I-405 at Coal Creek.

If this weekend's closure is postponed, the DOT will next try the weekend of Sept. 6, then the weekends of Sept. 13 or Sept. 20 if necessary, Cornish said. Failing that, she said, the DOT will consider paving one lane at a time or waiting until spring.

5518 **Drivers find ways around northbound 405 closure**

By Journal Staff

No major snarls were reported yesterday as a six-mile stretch of northbound Interstate 405 was closed for repaving.

The lanes will remain closed until 5 a.m. tomorrow. The closure extends from Coal Creek Parkway Southeast in Bellevue to State Route 169/Maple Valley Highway in Renton.

Southbound lanes along the same stretch were closed last weekend.

For more information on the I-405 road work, call (206) 368-4499 or (800) 695-7623. Cellular users can call toll-free at #800-4499.

Or access the DOT's web site through the Eastside Journal's homepage, www.eastsidejournal.com, or directly at www.ws-dot.wa.gov.

Opinion

Our View

Paving served motorists, taxpayers

Given our region's growing reputation for congestion, the past two weekends' closing of parts of I-405 has become the news story that wasn't.

The massive paving project went off without a hitch. Motorists found alternative ways around the southbound blockage (two weekends ago) or the northbound leg (this past weekend), changed their plans or maybe just stayed home.

Not only have motorists been spared months of lane narrowings in what would have been a drawn-out

project but the state also has been saved hundreds of thousands of dollars of extra expense.

Such freeway closing probably isn't right for every project. We know that the I-405 closing caused heavier traffic on I-5, even Sunday night; one shudders to think what a similar closing on I-5 would do.

But this one worked and the practice bears repeating. State transportation officials who took this gutsy step deserve our praise.

The water cooler

What Eastsiders are talking about

By Ann Garretson

WHAT DO YOU THINK OF THE WEEKEND CLOSURES OF I-405?

(asked at Factoria Mall)



James Ewing
Restaurant manager,
Newcastle

"It's a pain. A very big inconvenience that you have to reroute on the back roads. If they would've started the repaving at Exit 5 on Sunset, it wouldn't have been so bad. But starting at 169 — most people don't like to go through downtown Renton. From Coal Creek to Sunset wouldn't have been a problem."



Marianne O'Reilly
Customer service,
Renton

"I think they're terrific. I think it's the best thing in the whole world — no traffic, no snarls. I went the back roads."




Cindy Martin
Home engineer,
Mercer Island

"I think that they gave people enough advance warning, and if they get all the work done, it's worth it. We did rearrange our plans, but because we had advance warning, it was fine."



Loretta Pederson
Sales associate,
Lynnwood

"I thought it was a good idea. It might have been inconvenient for some people, but I really thought it was good to get it over and done with."



Aviva Beach
Care-giver, Bellevue

"Mixed feelings. I think it's great from a personal point of view because my husband works nights on road repair and he bumps into a lot more rude people at night. As a driver, it was a pain — a total inconvenience. Especially trying to get to the airport."



Saras Eisenberg
Full-time mother,
Issaquah

"It didn't affect me at all. But I think it's good because people knew ahead of time and could make alternative routes. We saw it many times in the papers and on the television news. It's easier than closing lanes, and it's worthwhile saving hundreds of thousands of dollars."

Photographs:
Anthony Bolante/Journal

Bellevue, WA
(King Co.)
Eastside Journal
(Cir. D. 34,224)

SEP 28 1997

Allen's P. C. B. Est. 1888

558 Our View

Walking the thin yellow line

If you think driving I-405 can be frustrating, try working on it.

Construction workers have been working day and night to accelerate completion of the project. They've done a good job. The current widening of the freeway between Renton and Bellevue is ahead of schedule

and under the original budget.

It's hard to keep that in mind when you're backed up in miles of traffic for yet another lane closure. Tempers sometimes flare.

No one knows that more than the crews working on the project. Drivers regularly hurl abuse their way, either words or sign language. Hard as it is to imagine, a few shots have even been fired.

As the weather gets worse, there will be more delays. Then, late this fall or early winter, the project should be over, which will be about one year ahead of the origi-

nal schedule.

That's the good news. The bad news is that the transportation problems of our region are still growing, and there will be no quick solutions.

We're glad to see more people seriously examining the adequacy of our current roads. A recent example is the Transportation Innovations Project, a group representing a broad mix of public and private interests. Included are representatives from the state Department of Transportation, the Regional Transit Authority, local city and county officials, and chamber of commerce representatives.

Over the next several weeks, the group is bringing leading national experts to discuss topics ranging from transportation funding and financing to public-private partnership and the competitive bidding for local transit service.

Few of us will have the time to take that much interest in the issue, even though it's one of the most important for the region. Short of that, how about simply acknowledging the efforts of those on the front line.

It wouldn't take much. Maybe just a smile, or a wave.

Unusual closure sparks two UW traffic studies

By Mike Ullmann
Journal Reporter

BELLEVUE — University of Washington professors and students studying the shutdowns of Interstate 405 are hoping for insight into a cosmic question: the difference between day and night.

Specifically, they want to know how it affects the quality of the pavement we'll be driving on for the next decade.

Another team of students is examining the cost of the shutdowns, particularly to businesses, and what effect they had on traffic patterns around Lake Washington.

"We also plan to look at the frequency and severity of accidents, on weekends before and during the closures," said Fred Mannering, a professor of civil engineering.

UW studies

Continued from A1

Mannering's students are sending out 2,500 surveys to I-405 frequent drivers, whom they identified by collecting license plates numbers along the highway before the shutdowns. The data won't be available for several weeks.

While that team is concerned with surveys, students of Prof. Phillip Dunston have been on the street — in this case the hot, fresh pavement just laid on 36 lane miles of I-405 between Bellevue and Renton.

Their quest: To determine if there is a difference in quality between asphalt laid during hours of daylight and hours of darkness.

"This project offers a unique opportunity to look at pavement quality on both the day and night cycles," said Dunston.

To get the answer, the professor and his students, often working through the night, measured the road before and after the fresh paving with a California profilograph — a sophisticated instrument that measures vertical displacement, or smoothness.

"That's the primary measure of paving quality — smoothness,"

said Dunston.

The federal government was sufficiently interested in the I-405 closures to fund most of the \$50,000 cost of both professors' studies, said Dunston.

The feds aren't the only ones interested in the closure, which is considered unusual nationwide, according to Bill Southern, spokesman for the state Department of Transportation.

Repaving is typically done one lane at a time, Southern said. "We've got six states watching this."

Journal Reporter Patricia Moir contributed to this report.

5518

Road's unusual closure 5514 sparks two UW studies

By Mike Ullmann
Journal Reporter

University of Washington professors and students studying the shutdowns of Interstate 405 are hoping for insight into a cosmic question: the difference between day and night.

At least, as it affects the quality of the pavement we'll be driving on for the next decade or so.

Another team of students is examining the cost of the shutdowns, particularly to businesses, and what effect they had on traffic patterns around Lake Washington.

"We also plan to look at the frequency and severity of accidents, on weekends before and during the closures," said Fred Mannering, a professor of civil engineering.

Mannering's students are sending out 2,500 surveys to I-405 frequent drivers, whom they identified by collecting license plates numbers along the high-

way before the shutdowns. The data won't be available for several weeks.

While that team is concerned with surveys, students of Prof. Phillip Dunston have been on the street -- in this case the hot, fresh pavement just laid on 36 lane miles of I-405 between Renton and Bellevue.

Their quest: to determine if there is a difference in quality between asphalt laid during daylight hours and hours of darkness.

"This project offers a unique opportunity to look at pavement quality on both the day and night cycles," said Dunston.

To get the answer, the professor and his students, often working through the night, measured

the road before and after the fresh paving with a California profilograph -- a sophisticated instrument that measures vertical displacement, or smoothness.

"That's the primary measure of paving quality -- smoothness," said Dunston.

The federal government was sufficiently interested in the I-405 closures to fund most of the \$50,000 cost of both professors' studies, said Dunston.

The feds aren't the only ones interested in the closure, which is considered unusual nationwide, according to Bill Southern, spokesman for the state Department of Transportation.

Repaving is typically done one lane at a time, Southern said. "We've got six states watching this."

Journal Reporter Patricia Moir contributed to this report.

5514