

JAMS

CACRC Depot Bonded Repair Investigation – Round Robin Testing



John Tomblin, PhD
Executive Director, NIAR



Lamia Salah
Sr. Research Engineer, NIAR



May 19th, 2010

The Joint **Advanced Materials** and **Structures** Center of **Excellence**



FAA Sponsored Project Information



- **Principal Investigators & Researchers**
 - **Dr. John Tomblin, Wichita State University**
 - **Lamia Salah, Wichita State University**
 - **Mike Borgman, Spirit Aerosystems**

- **FAA Technical Monitor**
 - **Curtis Davies, Lin Pham**

- **Other FAA Personnel Involved**
 - **Larry Ilcewicz, Peter Shyprykevich**

- **Industry Participation**
 - **Mike Borgman, Spirit Aerosystems and CACRC**
 - **John Welch, Spirit Aerosystems**

Wichita State University

Adhesively Bonded Structural Repairs – Advantages

- Can restore structure's ultimate strength and fatigue capability
- Lighter than mechanically fastened repairs
- More fatigue resistant than bolted repairs

Adhesively Bonded Structural Repairs – Limitations


- Single Load path (no redundancy)
- No methods available to guarantee absolute bond integrity
- Adhesively bonded Repairs are Process Dependent

Adhesively Bonded Structural Repairs – Challenges

- Growing use of composite materials in aircraft components (flight critical, primary)
- Need to demonstrate repaired component structural integrity

Reference CMH-17 Volume 3F Section 8.3 Support Implementation A repair has the objective of restoring a damaged structure to an acceptable capability in terms of strength, durability, stiffness, functional performance, safety, cosmetic appearance or service life. Ideally, the repair will return the structure to original capability and appearance

Wichita State University

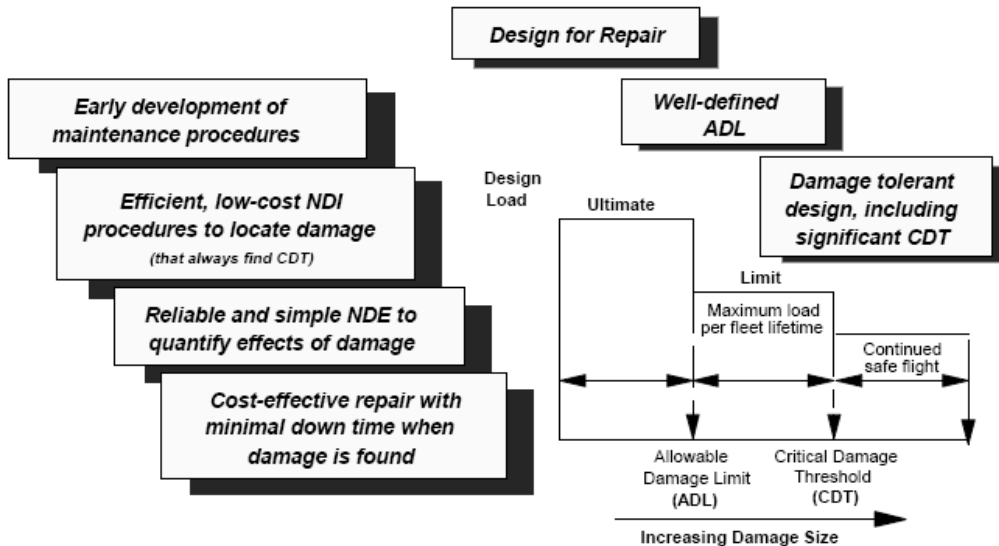


- **Damage greater than ADL has to be repaired when**
- **Repair philosophies have to be developed during the design phase**

Maintenance development philosophy established during Boeing/NASA (ATCAS) composite fuselage program

Reference CMH-17 Volume 3F Chapter 8 Supportability

Wichita State University

- To investigate different variables on the performance of bonded repairs applied to sandwich structures
- To investigate the effectiveness of bonded OEM vs field repairs implemented at various OEM/ Operator depots
- To evaluate the static, fatigue and residual strength performance of OEM vs field repairs
- To evaluate the existing CACRC standards for composite repair implementation and technician training

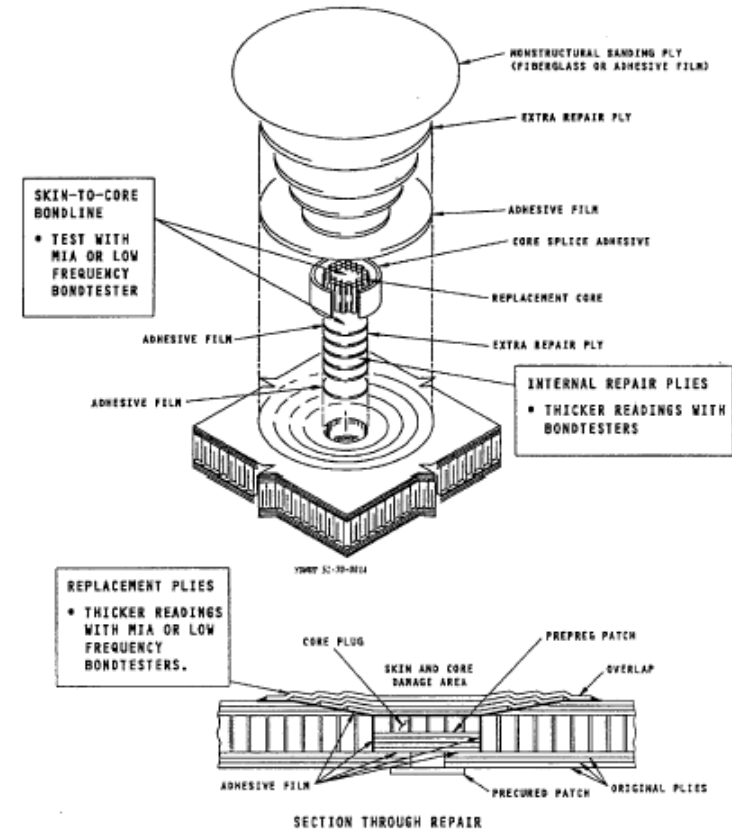

Reference SAE ARP5089




Previous Research





- **Objective:** To evaluate the strength performance of picture frame shear coupons repaired with two different methods, an OEM method and a field repair method

CACRC Wet lay-up Repair Method


- **Repair material:** Epocast 52 A/B laminating resin with TENEX Fibers
- **0.5" overlap**
- **1 extra ply**
- **200°F cure**

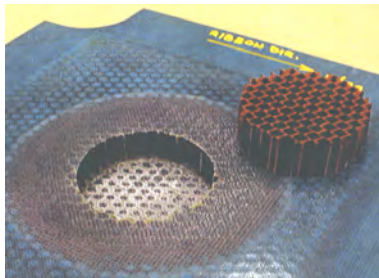

**Scarfed Panel w/
Routed Core**

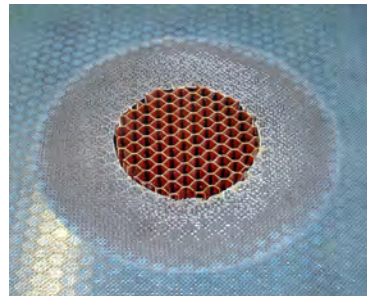

Core Restoration


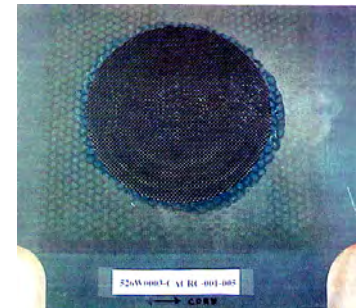


CACRC Repair

Wichita State University

OEM Prepreg Repair Method

- Repair material:
- T300/934 3K-70-PW prepreg with FM 377S adhesive
- 0.25" overlap
- No extra ply
- 350°F cure



OEM core restoration



OEM prepreg repair




Picture Frame Shear Test Set-Up

Wichita State University

- Picture Frame shear elements were sent to 4 different airline depots for repair
- All depots were provided shear elements to repair using the OEM and the CACRC repair procedure
- All shear elements were mechanically tested to failure

- **Strength values for coupons repaired at airline depot 1 were 25% lower than the average undamaged strength. This failure is representative of an equivalent open-hole, the size of the damage site indicative of an ineffective repair**


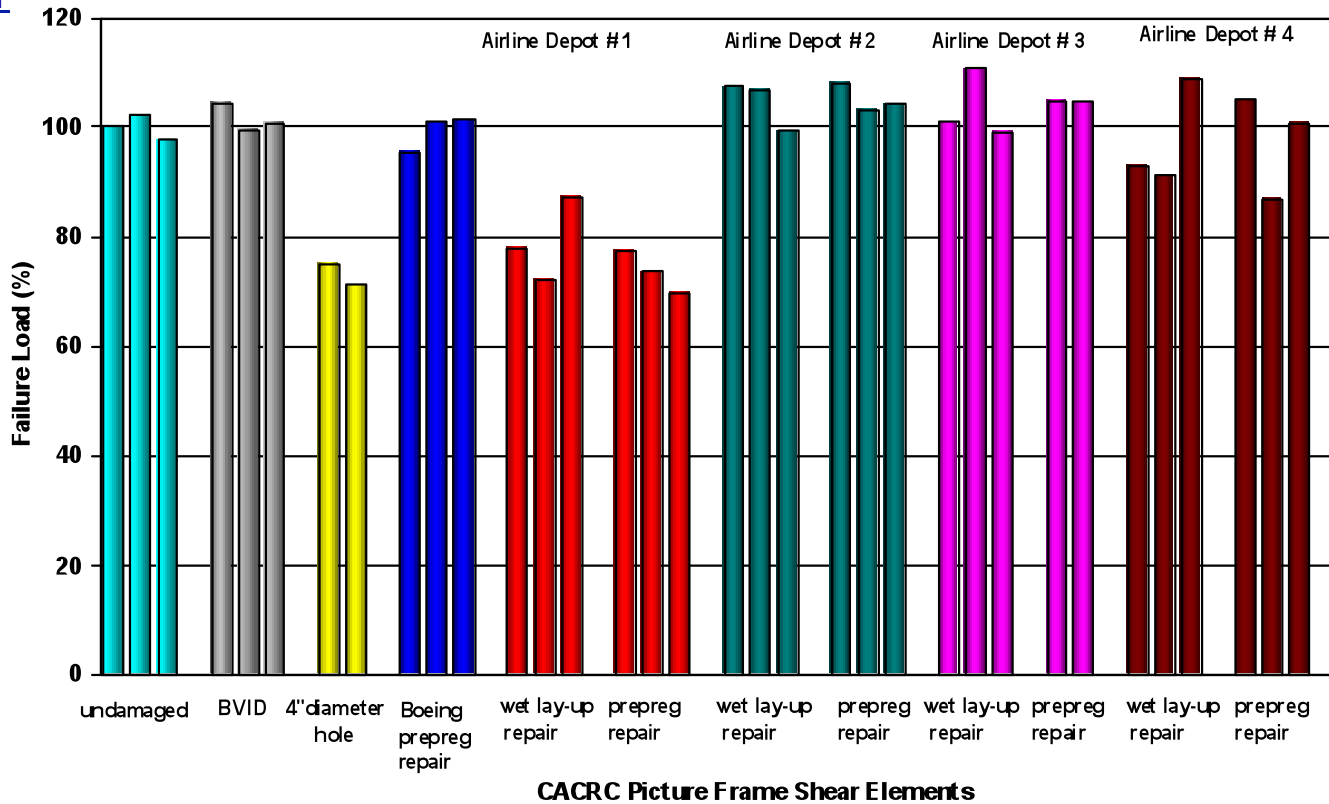


Previous Research – Contamination Investigation


- To evaluate the strength of contaminated repairs applied to laminate configurations. Five different contaminants were considered: Hydraulic oil (skydrol), jet fuel (JP8), paint stripper, water and perspiration.



**Environmental
Conditioning
Chamber**

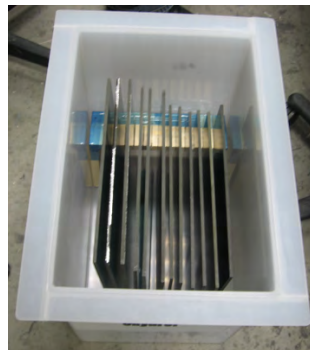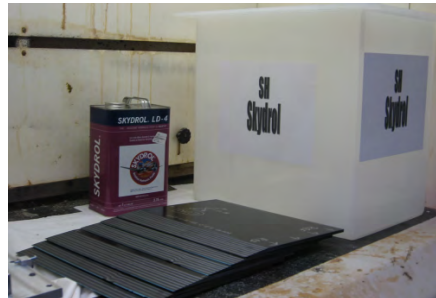

**Skydrol
Contamination**

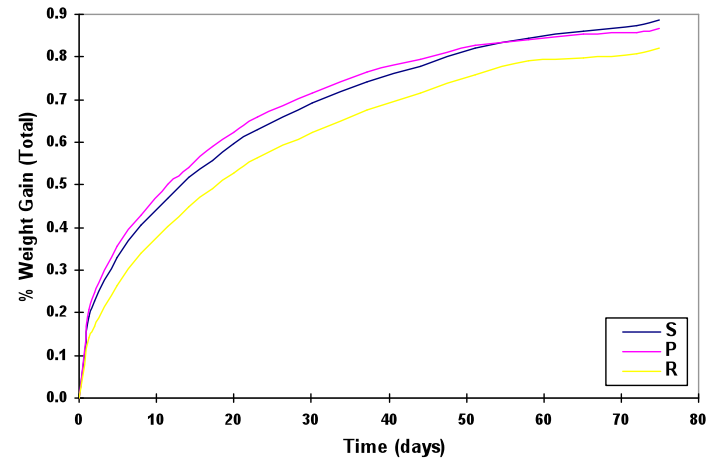


**Moisture gain as a
function of time**

Water specimens exposed to water until equilibrium then dried back to achieve moisture contents equivalent to 0%-25%-50% and 75% saturation

Wichita State University


Previous Research- Repair after Contaminant Exposure

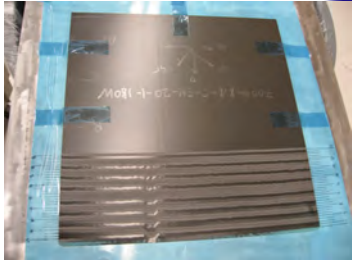


Scarfed parent panel ready for repair after contaminant exposure




Film adhesive application

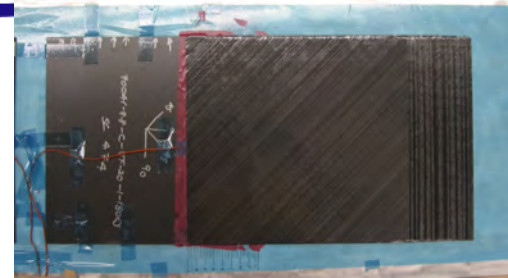

Repair ply application

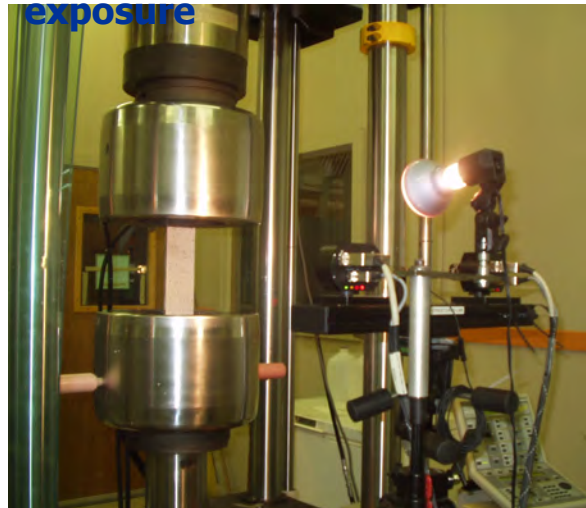


Mechanical Test Set-Up

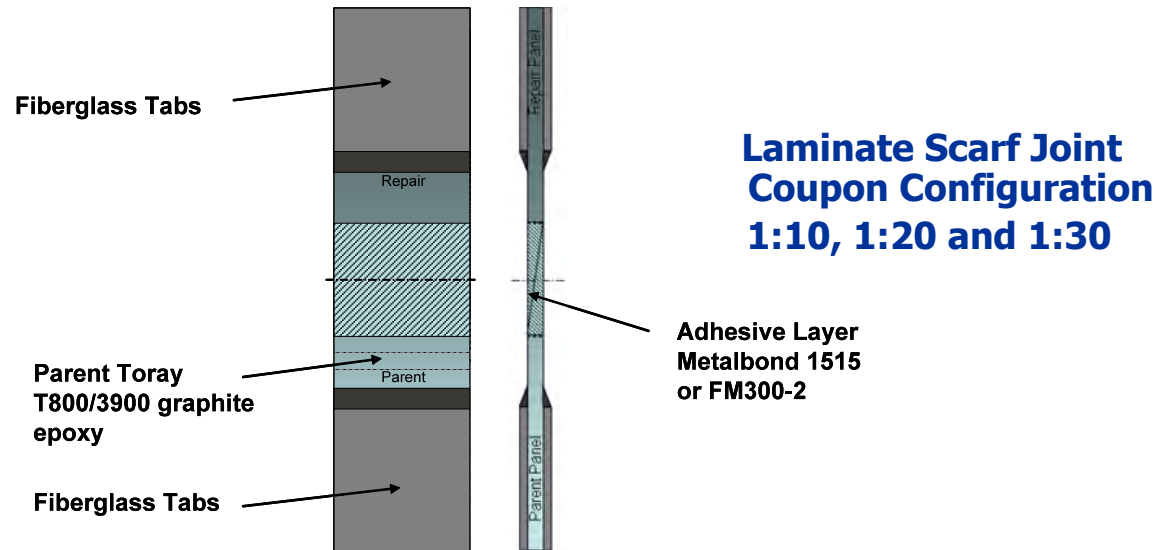

Wichita State University

Repair after Contaminant Exposure


- Even after fully drying the repair joint, the original repair joint capability may not be restored – highly system dependent based upon additional studies
 - WA-0 specimens are specimens that were conditioned at 145°F 85%RH until moisture equilibrium then dried back to 0% moisture
- Ultimate Strength of WA-0 specimens tested at**

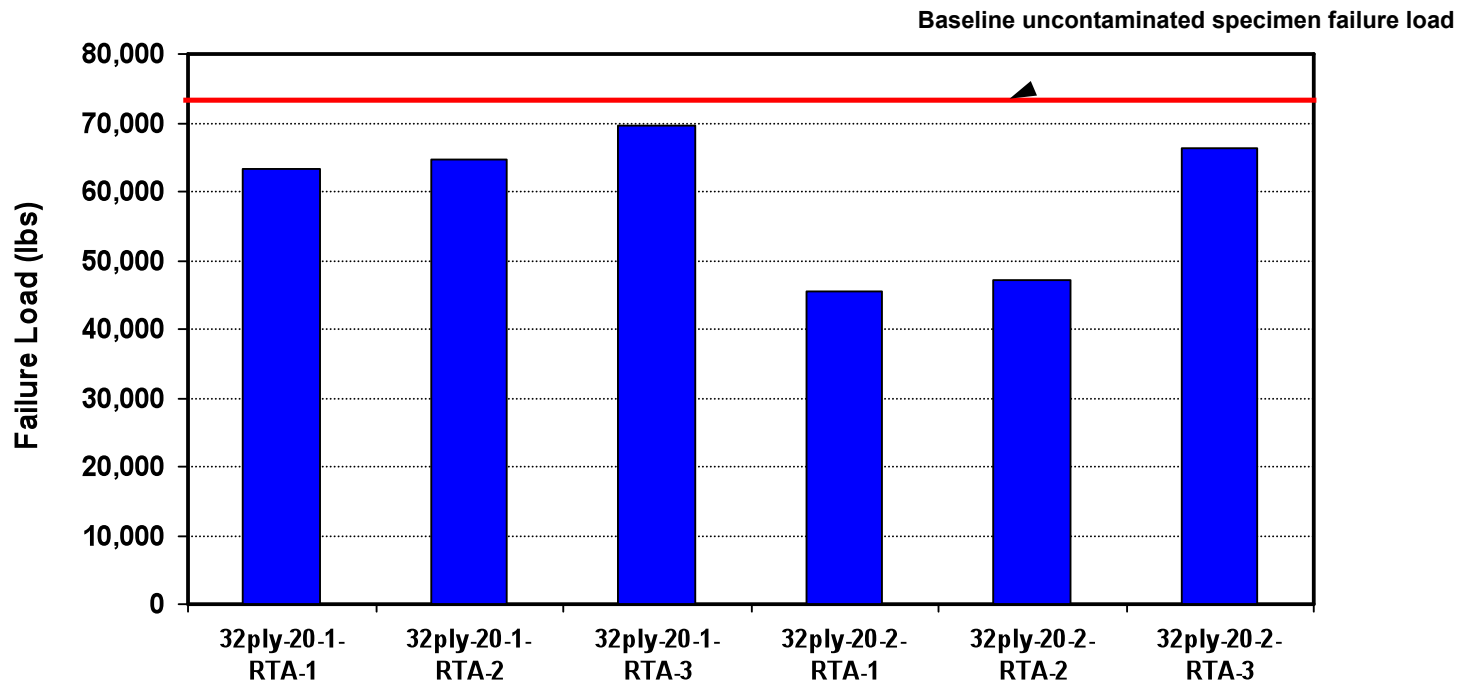

Repair after Contaminant Exposure

- **WA-75 specimens are specimens that were conditioned at 145°F 85%RH until moisture equilibrium then dried back to 75% saturation**

Ultimate Strength of WA-75 specimens tested at

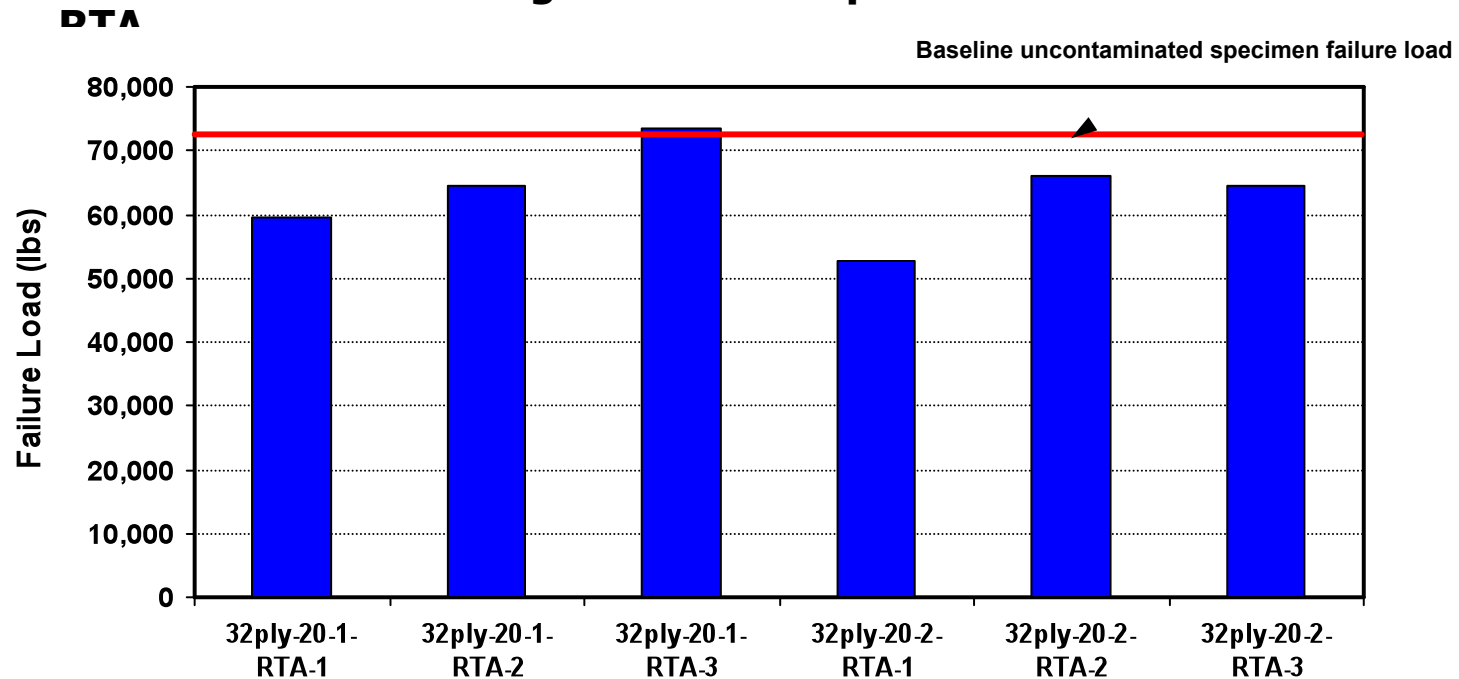

Wichita State University

- **Absorption and diffusion of water in polymeric material is related to the free volume which depends on molecular packing (degree of cure)**
- **Water molecules that attach to the polymer through H bonds disrupt the interchain H bonds, induce swelling and plasticize the polymer**
- **Moisture absorption is a function of degree of cure. Imperfectly cured systems allow moisture ingress due to the relatively loose chemical network structure**
- **Moisture absorption may cause irreversible changes in the epoxy network (evidence provided by the study of absorption-desorption cycling)**

Ref A.F.Abdelkader, J.R.White: Water Absorption in Epoxy Resins, The effects of the Cross Linking Agent and Curing Temperature

Wichita State University

Previous Research – Lessons Learned

Adhesively Bonded Repairs are Process Dependent

- **Repair Technician Training:** technician training directly affects the quality (structural integrity of a bonded repair). Only properly/ recently trained technicians should perform bonded repairs
- **Cure Cycle Deviation:** an improper cure cycle will yield a deficient repair
- **Contaminated Repair Surface:** pre-bond moisture, contaminated repair surface will yield a substandard bonded repair


Bonded Repair Quality Assurance



Wichita State University

Proposed Research – Sandwich Coupon Configuration

- Large beams, 12" x 48" with the repair tested in compression
- 3-ply facesheets, 1/8" core cell size, 2" thick

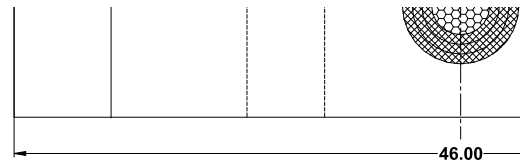

- Parent Material: T300/ 934 with FM 377S adhesive
- Repair Materials: OEM repair using parent system (350°F cure)
Field repair 1 using Hexcel M20 PW (250°F cure) - Prepreg
Field repair 2 using Epocast 52A/B - Wet lay-up

Wichita State University

Sandwich Test Matrix

- A 2.5" hole diameter will be used to simulate damage on all coupons
- Detailed test matrix is outlined below

Industry participation:


- Spirit Aerosystems – Coupon manufacture/ OEM Repair (Mike Borgman, John Welch)
- Airbus – (Francois Museux)
- Northwest/ Delta Airlines (Ray Kaiser), United Airlines (Eric Chesmar), US airways (Mike Tallarico), Aviation Technology Associates (Marc G Felice)

CACRC Round Robin Test Matrix

| Repair Station | Coupon Configuration | Repair Type | Number of test Replicates Loading Mode | | |
|-----------------|----------------------|-------------|--|------------------------|--------------------|
| | | | Compression Static RTA | Compression Static ETW | Compression RS ETW |
| OEM | Pristine/ Undamaged | N/A | 6 | 6 | 6 |
| OEM | 2.5" hole | None | | 3 | 3 |
| OEM | 2.5" hole | 2D-OEM | | 3 | 3 |
| Field Station 1 | 2.5" hole | 2D-R1 | | 3 | 3 |
| Field Station 1 | 2.5" hole | 2D-R2 | | 3 | 3 |
| Field Station 2 | 2.5" hole | 2D-R1 | | 3 | 3 |
| Field Station 2 | 2.5" hole | 2D-R2 | | 3 | 3 |
| Field Station 3 | 2.5" hole | 2D-R1 | | 3 | 3 |
| Field Station 3 | 2.5" hole | 2D-R2 | | 3 | 3 |
| Field Station 4 | 2.5" hole | 2D-R1 | | 3 | 3 |
| Field Station 4 | 2.5" hole | 2D-R2 | | 3 | 3 |
| Total | | | 6 | 36 | 36 |

Wichita State University


- Four-point Bending Test Set-up
- MTS hardware and software used to control the test
- Repaired elements tested for ultimate strength and durability
- Elements cycled for 165000 cycles to demonstrate repair acceptability
- Residual strength performed after fatigue

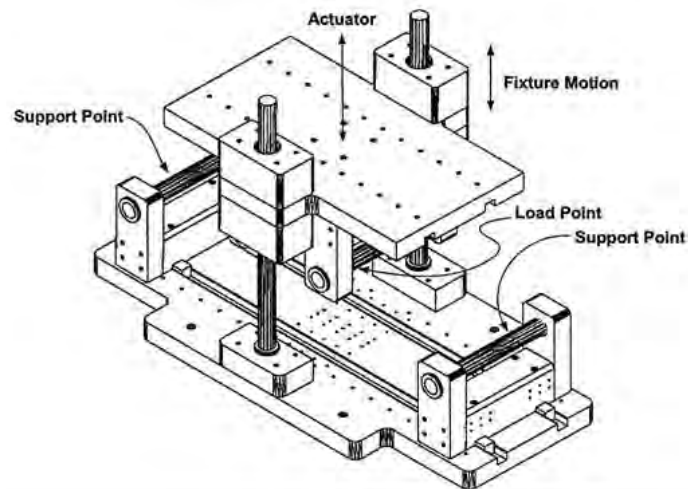

Wichita State University

Proposed Research – Program Timeline

Program Timeline

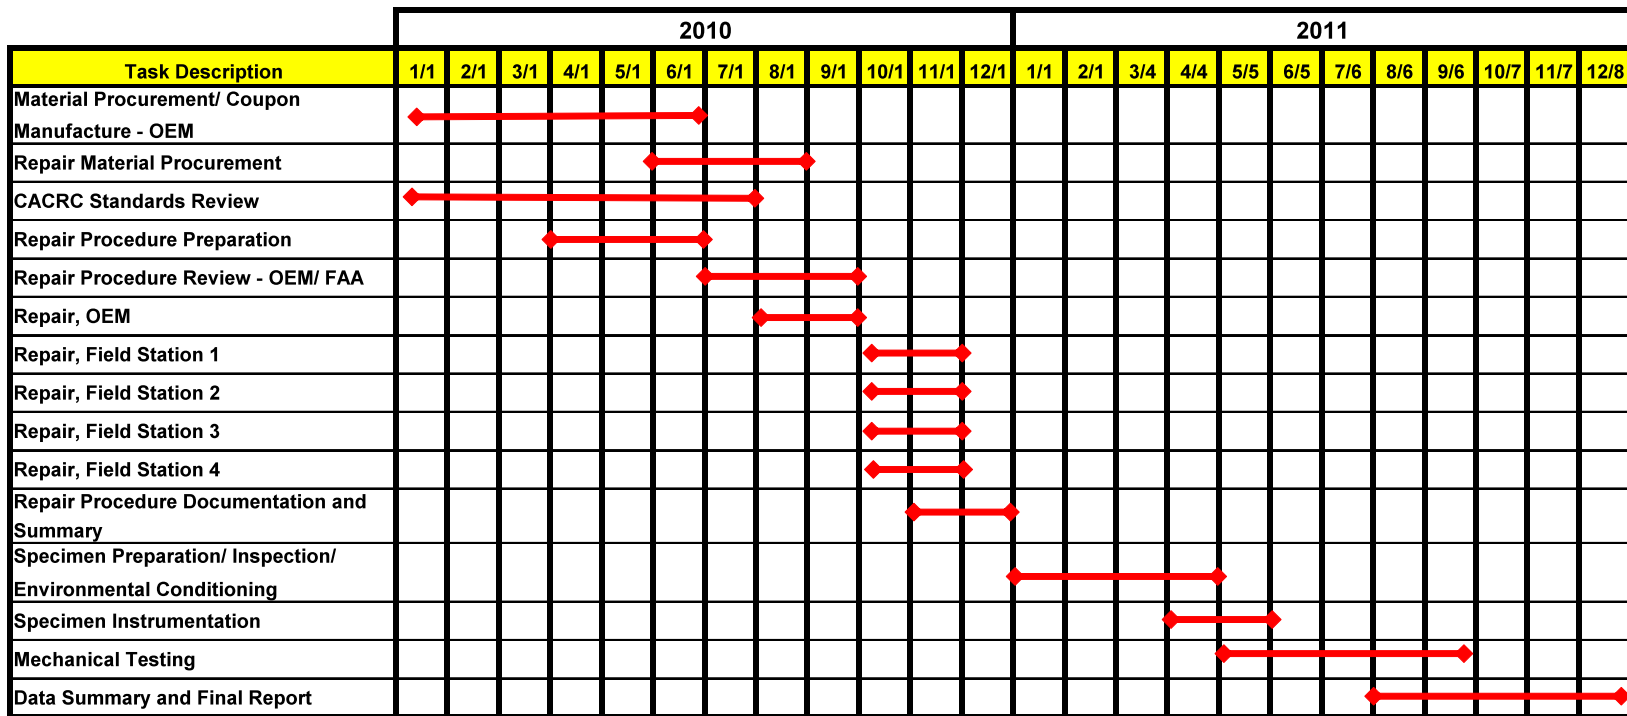

Wichita State University

- NIAR will provide detailed Repair procedures to be reviewed by OEM (Airbus and Boeing)
- Approved repair procedures will be supplied along with coupons to OEM/ field stations for repair
- Repair technician level of training and cure profile, detailed processes will be documented
- Planning for panel manufacture in progress

Benefits to Aviation

- To investigate the effectiveness of OEM vs field repairs and the variability due to repair implementation at various operator depots.
- To identify key elements in the implementation of bonded repairs that ensure repeatability and structural integrity of these repairs
- To provide recommendations pertaining to repair technician training and repair process control

Wichita State University